



# CHB50W Series Application Note V18 December 2014

## ISOLATED DC-DC CONVERTER CHB50W SERIES APPLICATION NOTE



### Approved By:

Department	Approved By	Checked By	Written By
Research and Development Department	Enoch	Danny	Joyce
Quality Assurance Department	Jack	Benny	



# CHB50W Series

## Application Note V18 December 2014

---

### Contents

1. Introduction .....	3
2. DC-DC Converter Features.....	3
3. Electrical Block Diagram .....	3
4. Technical Specifications.....	4
5. Main Features and Functions.....	7
5.1 Operating Temperature Range.....	7
5.2 Output Voltage Adjustment.....	7
5.3 Over Current Protection.....	7
5.4 Output Over Voltage Protection.....	7
5.6 Remote On/Off.....	7
5.7 UVLO (Under Voltage Lock Out) .....	7
5.8 Over Temperature Protection.....	7
6. Applications.....	7
6.1 Recommended Layout, PCB Footprint and Soldering Information.....	7
6.2 Convection Requirements for Cooling .....	8
6.3 Thermal Considerations .....	8
6.4 Input Capacitance at the Power Module.....	8
6.5 Power Derating.....	9
6.6 Half Brick Heat Sinks:.....	11
6.7 Efficiency VS. Load .....	12
6.8 Test Set-Up.....	15
6.9 Output Voltage Adjustment.....	15
6.10 Output Remote Sensing .....	16
6.11 Output Ripple and Noise.....	16
6.12 Output Capacitance.....	17
7. Safety & EMC.....	17
7.1 Input Fusing and Safety Considerations.....	17
7.2 EMC Considerations.....	17
8. Part Number.....	20
9. Mechanical Specifications .....	20
9.1 Mechanical Outline Diagrams.....	20



# CHB50W Series

## Application Note V18 December 2014

### 1. Introduction

The CHB50W series offers 50 watts of output power with high power density in an industry standard half-brick package. The CHB50W series has wide (4:1) input voltage ranges of 9-36 and 18-75VDC and provides a precisely regulated output. This series has features such as high efficiency, 1500VDC isolation and a case operating temperature range of  $-40^{\circ}\text{C}$  to  $100^{\circ}\text{C}$ . The modules are fully protected against input UVLO (under voltage lock out), output short circuit, output over voltage and over temperature conditions. Furthermore, the standard control functions include remote on/off and output voltage trimming. All models are highly suited to telecommunications, distributed power architectures, battery operated equipment, industrial, and mobile equipment applications.

### 2. DC-DC Converter Features

- 33-50W Isolated Output
- 4:1 Wide Input Range
- Efficiency (at full load) up to 87%
- Regulated Outputs
- Fixed Switching Frequency
- Input Under Voltage Lockout Protection
- Over Current Protection
- Remote ON/OFF
- Continuous Short Circuit Protection
- Industry Standard Half-Brick Package
- Fully Isolated to 1500VDC

### 3. Electrical Block Diagram

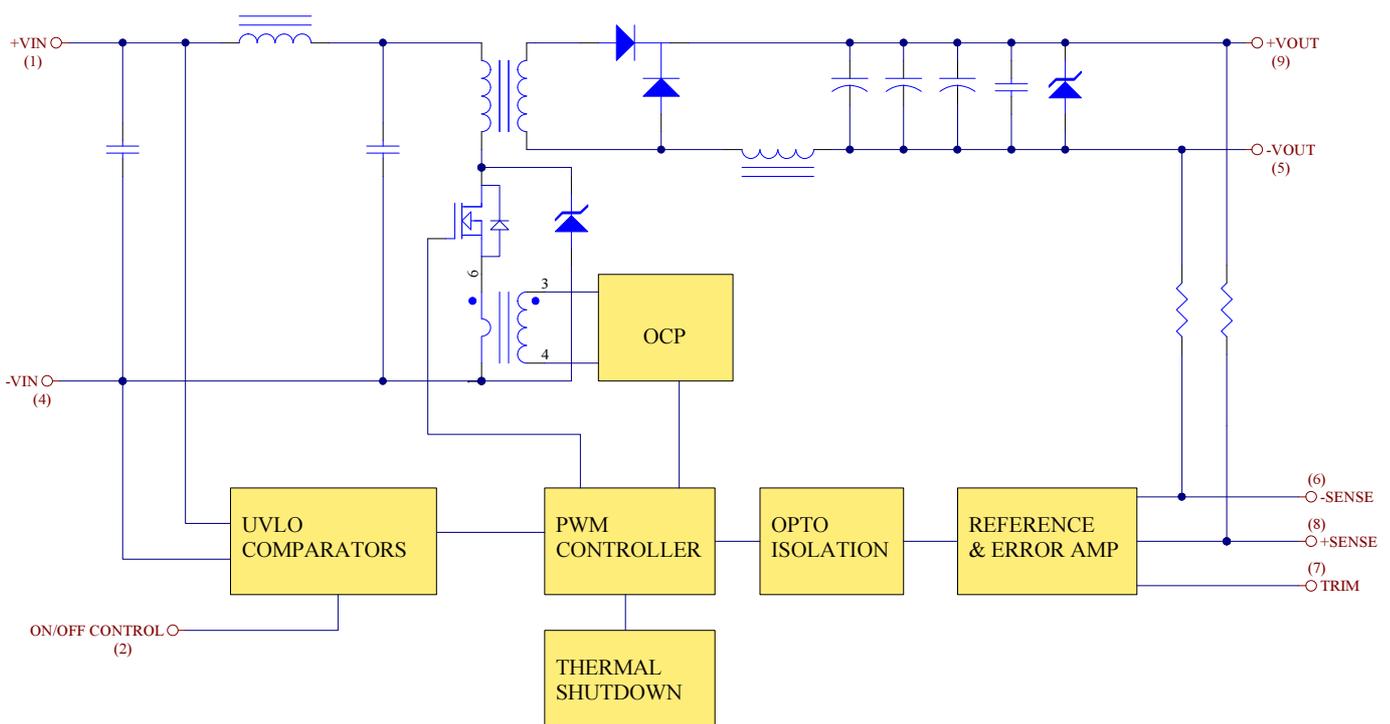


Figure 1 Electrical Block Diagram of CHB50W Series Module



# CHB50W Series

## Application Note V18 December 2014

### 4. Technical Specifications

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

#### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Input Voltage						
Continuous		24SXX	-0.7		36	$V_{dc}$
		48SXX	-0.7		75	
Transient	100ms	24SXX			50	$V_{dc}$
		48SXX			100	
Operating Case Temperature			-40		100	°C
Storage Temperature			-55		105	°C
Isolation Voltage	1 minute; input/output, input/case, output/case		1500			$V_{dc}$

#### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Operating Input Voltage		24SXX	9	24	36	$V_{dc}$
		48SXX	18	48	75	
Input Under Voltage Lockout						
Turn-On Voltage Threshold		24SXX		8.8		$V_{dc}$
		48SXX		17		
Turn-Off Voltage Threshold		24SXX		8.0		$V_{dc}$
		48SXX		16		
Lockout Hysteresis Voltage		24SXX		0.8		$V_{dc}$
		48SXX		1		
Maximum Input Current	100% Load, $V_{in}=9V$ for 24SXX	24SXX		7.1		A
	100% Load, $V_{in}=18V$ for 48SXX	48SXX		3.4		
No-Load Input Current		24SXX		50		mA
		48SXX		50		
Inrush Current ( $I^2t$ )					TBD	$A^2s$
Input Reflected Ripple Current	P-P thru 12uH inductor, 5Hz to 20MHz	24SXX		TBD		mA
		48SXX		TBD		

#### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Output Voltage Set Point	$V_{in}=\text{Nominal } V_{in}, I_o = I_{o\_max}, T_c=25^\circ C$	$V_o=3.3 V_{dc}$	3.267	3.3	3.333	$V_{dc}$
		$V_o=5.0 V_{dc}$	4.95	5	5.05	
		$V_o=12 V_{dc}$	11.88	12	12.12	
		$V_o=15 V_{dc}$	14.85	15	15.15	
		$V_o=24 V_{dc}$	23.76	24	24.24	
		$V_o=28 V_{dc}$	27.72	28	28.28	
		$V_o=48 V_{dc}$	47.52	48	48.48	



# CHB50W Series

## Application Note V18 December 2014

Output Voltage Regulation						
Load Regulation	$I_o = I_{o\_min}$ to $I_{o\_max}$ (for 48Vout: Require a 47uF aluminum capacitor connected between +Vout and -Vout)	All			±0.2	%
Line Regulation	$V_{in}$ =low line to high line (for 48Vout: Require a 47uF aluminum capacitor connected between +Vout and -Vout)	All			±0.2	%
Temperature Coefficient	TC=-40°C to 100°C	All			±0.03	%/°C
Output Voltage Ripple and Noise						
Peak-to-Peak	5Hz to 20MHz bandwidth, Full load 10uF tantalum and 1.0uF ceramic capacitors	$V_o = 3.3\&5.0V$ $V_o = 12\&15V$ $V_o = 24V$ $V_o = 28V$			100 150 240 280	mV
	Full load 1.0uF ceramic capacitors	$V_o = 48V$			480	
RMS	5Hz to 20MHz bandwidth, Full load, 10uF solid tantalum and 1.0uF ceramic capacitors	$V_o = 3.3\&5.0V$ $V_o = 12\&15V$ $V_o = 24\&28V$			40 60 100	mV
	Full load 1.0uF ceramic capacitors	$V_o = 48V$			200	
Operating Output Current Range		$V_o = 3.3 V_{dc}$	0		10	A
		$V_o = 5.0 V_{dc}$	0		10	
		$V_o = 12 V_{dc}$	0		4.16	
		$V_o = 15 V_{dc}$	0		3.33	
		$V_o = 24 V_{dc}$	0		2.08	
		$V_o = 28 V_{dc}$	0		1.78	
		$V_o = 48 V_{dc}$	0		1.04	
Output DC Current Limit Inception	Output Voltage=90% Nominal Output Voltage	All	110		160	%
Maximum Output Capacitance	Full load (resistive)	XXS33	0		10000	uF
		XXS05	0		10000	
		XXS12	0		4160	
		XXS15	0		3330	
		XXS24	0		2080	
		XXS28	0		1780	
		XXS48	47		1040	

### DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Output Voltage Current Transient						
Step Change in Output Current	75% to 100% of $I_{o\_max}$	All			±5	%
Setting Time (within 1% Vout nominal)	$d_i/d_o = 0.1A/us$	All			500	us
Turn-On Delay and Rise Time						
Turn-On Delay Time, From On/Off Control	$V_{on/off}$ to 10% $V_{o\_set}$	All		5		ms
Turn-On Delay Time, From Input	$V_{in\_min}$ to 10% $V_{o\_set}$	All		4		ms
Output Voltage Rise Time	10% $V_{o\_set}$ to 90% $V_{o\_set}$	All		1		ms



# CHB50W Series

## Application Note V18 December 2014

### EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
100% Load		24S33		79		%
		24S05		81		
		24S12		83		
		24S15		85		
		24S24		84		
		24S28		83		
		24S48		83		
		48S33		81		
		48S05		83		
		48S12		85		
		48S15		87		
		48S24		86		
		48S28		85		
		48S48		84		

### ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Isolation Voltage	1 minute; input/output, input/case, output/case				1500	V <sub>dc</sub>
Isolation Resistance			10			MΩ
Isolation Capacitance				1000		pF

### FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Switching Frequency				300		KHz
On/Off Control, Positive Remote On/Off logic						
Logic Low (Module Off)	V <sub>on/off</sub> at I <sub>on/off</sub> =1.0mA				0.8	V
Logic High (Module On)	V <sub>on/off</sub> at I <sub>on/off</sub> =0.0uA		3.5 or Open Circuit		75	V
On/Off Control, Negative Remote On/Off logic						
Logic High (Module Off)	V <sub>on/off</sub> at I <sub>on/off</sub> =0.0uA		3.5 or Open Circuit		75	V
Logic Low (Module On)	V <sub>on/off</sub> at I <sub>on/off</sub> =1.0mA				0.8	V
Off Converter Input Current	Shutdown input idle current				10	mA
Output Voltage Trim Range	P <sub>out</sub> =max rated power		-10		+10	%
Output Over Voltage Protection	With TVS clamp		115	125	140	%
Over-Temperature Protection	Shutdown Case Temperature			100		°C
	Restart threshold Case Temperature			70		°C

### GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
MTBF	I <sub>o</sub> =100% of I <sub>o,max</sub> ; T <sub>a</sub> =25°C per MIL-HDBK-217F			1		M hours
Weight				94		grams



# CHB50W Series

## Application Note V18 December 2014

### 5. Main Features and Functions

#### 5.1 Operating Temperature Range

The CHB50W series converters can be operated within a wide case temperature range of  $-40^{\circ}\text{C}$  to  $100^{\circ}\text{C}$ . Consideration must be given to the derating curves when ascertaining maximum power that can be drawn from the converter. The maximum power drawn from half brick models is influenced by usual factors, such as:

- Input voltage range
- Output load current
- Forced air or natural convection

#### 5.2 Output Voltage Adjustment

Section 6.8 describes in detail how to trim the output voltage with respect to its set point. The output voltage on all models is adjustable within the range of  $+10\%$  to  $-10\%$ .

#### 5.3 Over Current Protection

All models have internal over current and continuous short circuit protection. The unit operates normally once the fault condition is removed. At the point of current limit inception, the output voltage of converter will be going down into current limit and power fold-back protection.

#### 5.4 Output Over Voltage Protection


The output terminals connect a TVS (Transient Voltage Suppressor) diode. The TVS is used by the function of output over voltage protection to avoid the output voltage increase too high in abnormal condition. If more accurate output over voltage protection is required then an external circuit can be used via the remote on/off pin.

#### 5.6 Remote On/Off

The CHB50W series allows the user to switch the module on and off electronically with the remote on/off feature. All models are available in "positive logic" and "negative logic" (optional) versions. The converter turns on if the remote On/Off pin is high ( $>3.5\text{Vdc}$  or open circuit). Setting the pin low ( $<0.8\text{Vdc}$ ) will turn the converter off. The signal level of the remote on/off input is defined with respect to ground. If not using the remote on/off pin, leave the pin open (converter will be on). Models with part number suffix "N" are the "negative logic" remote On/Off version. The unit turns off if the remote On/Off pin is high ( $>3.5\text{Vdc}$  or open circuit). The converter turns on if the On/Off pin input is low ( $<0.8\text{Vdc}$ ). Note that the converter is off by default.

#### 5.7 UVLO (Under Voltage Lock Out)

Input under voltage lockout is standard on the CHB50W unit. The unit will shut down when the input voltage drops below a threshold, and the unit will

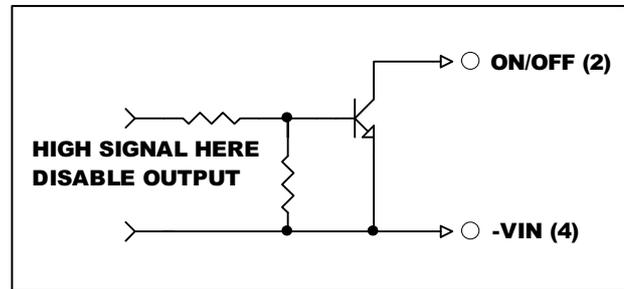

operate when the input voltage goes above the upper threshold.

#### 5.8 Over Temperature Protection


These modules have an over temperature protection circuit to safeguard against thermal damage. The module shuts down and latches off when the maximum case reference temperature is exceeded. The module will restart when the case temperature falls below restart threshold.

### 6. Applications

#### 6.1 Recommended Layout, PCB Footprint and Soldering Information

The system designer or end user must ensure that metal and other components in the vicinity of the converter meet the spacing requirements for which the system is approved. Low resistance and inductance PCB layout traces are the norm and should be used where possible. Due consideration must also be given to proper low impedance tracks between power module, input and output grounds. The recommended soldering profile and PCB layout are shown below.


Lead Free Wave Soldering Profile

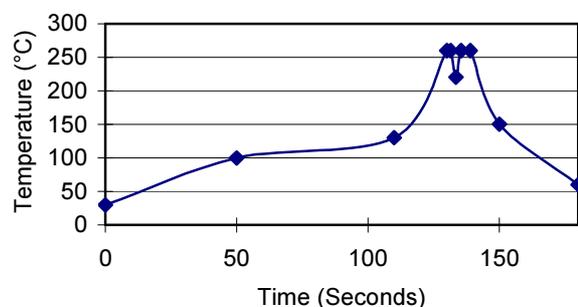



# CHB50W Series

## Application Note V18 December 2014

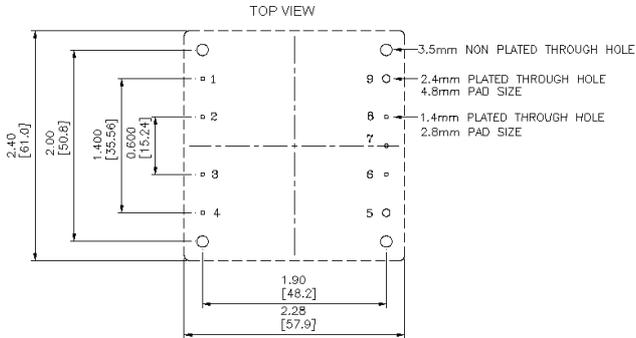

### 6.2 Convection Requirements for Cooling


To predict the approximate cooling needed for the half brick module, refer to the power derating curves in section 6.4. These derating curves are approximations of the ambient temperatures and airflows required to keep the power module temperature below its maximum rating. Once the module is assembled in the actual system, the module's temperature should be monitored to ensure it does not exceed 100°C as measured at the center of the top of the case (thus verifying proper cooling).

### 6.3 Thermal Considerations

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. The example is presented in section 6.4. The power output of the module should not be allowed to exceed rated power ( $V_{o\_set} \times I_{o\_max}$ ).

### 6.4 Input Capacitance at the Power Module

The converters must be connected to low AC source impedance. To avoid problems with loop stability source inductance should be low. Also, the input capacitors ( $C_{in}$ ) should be placed close to the converter input pins to decouple distribution inductance. However, the external input capacitors are chosen for suitable ripple handling capability. Low ESR capacitors are good choice. Circuit as shown as below represents typical measurement methods for reflected ripple current.  $C_1$  and  $L_1$  simulate a typical DC source impedance. The input reflected-ripple current is measured by current probe to oscilloscope with a simulated source Inductance ( $L_1$ ).

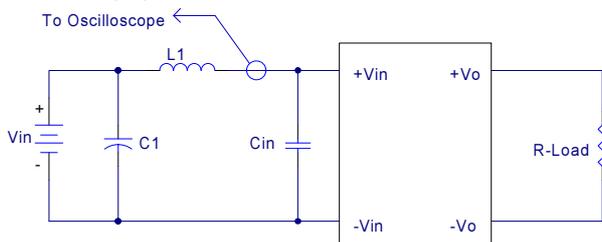

L1: 12uH  
 C1: 220uF ESR<0.1ohm @100KHz  
 Cin: 100uF ESR<0.1ohm @100KHz  
 Input Reflected-Ripple Test Setup




# CHB50W Series

## Application Note V18 December 2014

### 6.5 Power Derating

The operating case temperature range of CHB50W series is  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$ . When operating the CHB50W series, proper derating or cooling is needed. The maximum case temperature under any operating condition should not exceed  $100^{\circ}\text{C}$ .

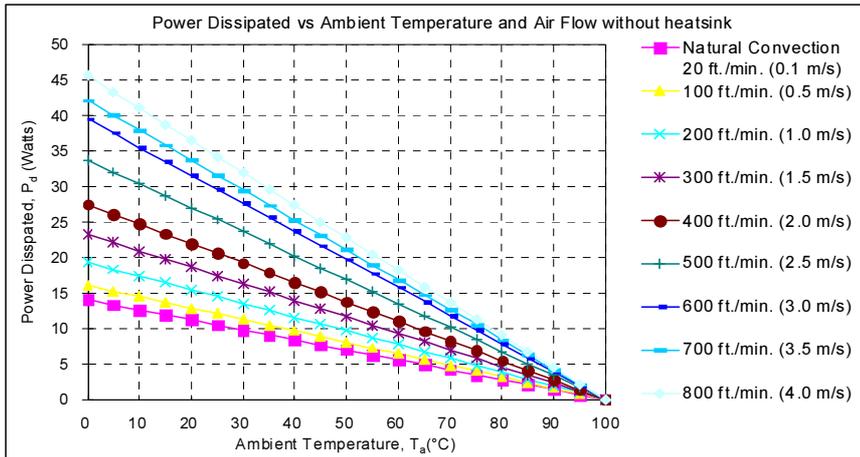

AIR FLOW RATE	TYPICAL $R_{ca}$
Natural Convection	$7.12^{\circ}\text{C/W}$
20ft./min. (0.1m/s)	$6.21^{\circ}\text{C/W}$
100 ft./min. (0.5m/s)	$6.21^{\circ}\text{C/W}$
200 ft./min. (1.0m/s)	$5.17^{\circ}\text{C/W}$
300 ft./min. (1.5m/s)	$4.29^{\circ}\text{C/W}$
400 ft./min. (2.0m/s)	$3.64^{\circ}\text{C/W}$
500 ft./min. (2.5m/s)	$2.96^{\circ}\text{C/W}$
600 ft./min. (3.0m/s)	$2.53^{\circ}\text{C/W}$
700 ft./min. (3.5m/s)	$2.37^{\circ}\text{C/W}$
800 ft./min. (4.0m/s)	$2.19^{\circ}\text{C/W}$

#### Example:

What is the minimum airflow necessary for a CHB50W-24S12 operating at nominal line voltage, an output current of 4.16A, and a maximum ambient temperature of  $50^{\circ}\text{C}$

#### Solution:

##### Given:

$$V_{in}=24\text{Vdc}, V_o=12\text{Vdc}, I_o=4.16\text{A}$$

##### Determine Power dissipation ( $P_d$ ):

$$P_d = P_i - P_o = P_o(1-\eta)/\eta$$

$$P_d = 12 \times 4.16 \times (1-0.83)/0.83 = 10.22\text{Watts}$$

##### Determine airflow:

$$\text{Given: } P_d = 10.22\text{W and } T_a = 50^{\circ}\text{C}$$

##### Check above Power Derating curve:

Minimum airflow= 300 ft./min.

##### Verify:

The maximum temperature rise

$$\Delta T = P_d \times R_{ca} = 10.22 \times 4.29 = 43.84^{\circ}\text{C}$$

The maximum case temperature

$$T_c = T_a + \Delta T = 93.84^{\circ}\text{C} < 100^{\circ}\text{C}$$

##### Where:


The  $R_{ca}$  is thermal resistance from case to ambience.

The  $T_a$  is ambient temperature and the  $T_c$  is case temperature.



# CHB50W Series

## Application Note V18 December 2014

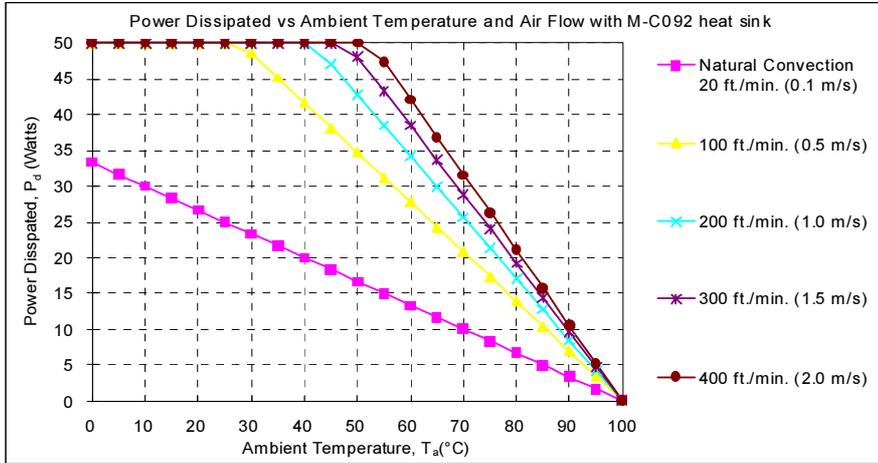

AIR FLOW RATE	TYPICAL $R_{ca}$
Natural Convection 20ft./min. (0.1m/s)	3°C/W
100 ft./min. (0.5m/s)	1.44°C/W
200 ft./min. (1.0m/s)	1.17°C/W
300 ft./min. (1.5m/s)	1.04°C/W
400 ft./min. (2.0m/s)	0.95°C/W

Example (with heatsink M-C092):

What is the minimum airflow necessary for a CHB50W-48S05 operating at nominal line voltage, an output current of 15A, and a maximum ambient temperature of 60°C

**Solution:**

**Given:**

$$V_{in}=24V_{dc}, V_o=5V_{dc}, I_o=10A$$

**Determine Power dissipation ( $P_d$ ):**

$$P_d=P_i-P_o=P_o(1-\eta)/\eta$$

$$P_d=5 \times 10 \times (1-0.81)/0.81=11.73Watts$$

**Determine airflow:**

Given:  $P_d=11.73W$  and  $T_a=60^\circ C$

**Check above Power de-rating curve:**

$$P_d < 20W, \text{ Natural Convection}$$

**Verify:** Maximum temperature rise is  $\Delta T = P_d \times R_{ca}=11.73 \times 3=35.19^\circ C$

$$\text{Maximum case temperature is } T_c=T_a+\Delta T=95.19^\circ C < 100^\circ C$$

**Where:** The  $R_{ca}$  is thermal resistance from case to ambient environment.



$T_a$  is ambient temperature and  $T_c$  is case temperature.



# CHB50W Series



## Application Note V18 December 2014

### 6.6 Half Brick Heat Sinks:

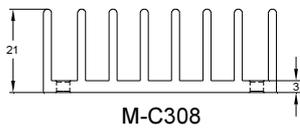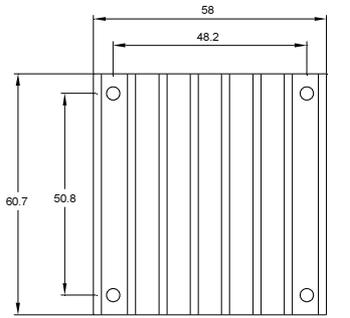



M-C308  
M-C308 (G6620400201)  
Longitudinal Heat Sink

**Rca:**  
 3.90°C/W (typ.), natural convection  
 1.74°C/W (typ.), at 100LFM  
 1.33°C/W (typ.), at 200LFM  
 1.12°C/W (typ.), at 300LFM  
 0.97°C/W (typ.), at 400LFM

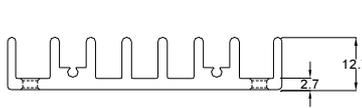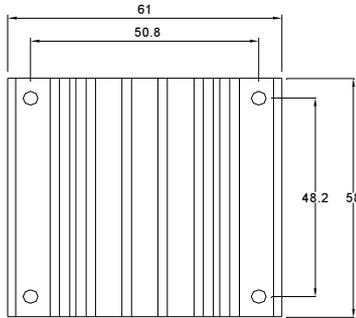


M-C091  
M-C091 (G6610120402)  
Transverse Heat Sink

**Rca:**  
 4.70°C/W (typ.), natural convection  
 2.89°C/W (typ.), at 100LFM  
 2.30°C/W (typ.), at 200LFM  
 1.88°C/W (typ.), at 300LFM  
 1.59°C/W (typ.), at 400LFM

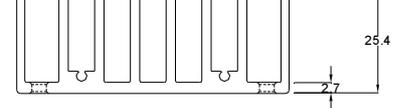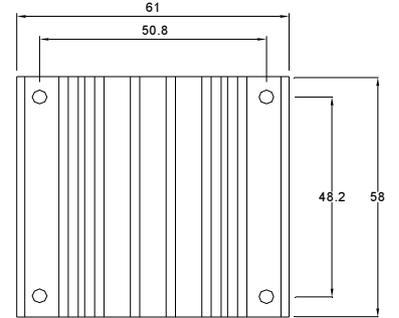

M-C092  
M-C092 (G6610130402)  
Transverse Heat Sink

**Rca:**  
 3.00°C/W (typ.), natural convection  
 1.44°C/W (typ.), at 100LFM  
 1.17°C/W (typ.), at 200LFM  
 1.04°C/W (typ.), at 300LFM  
 0.95°C/W (typ.), at 400LFM

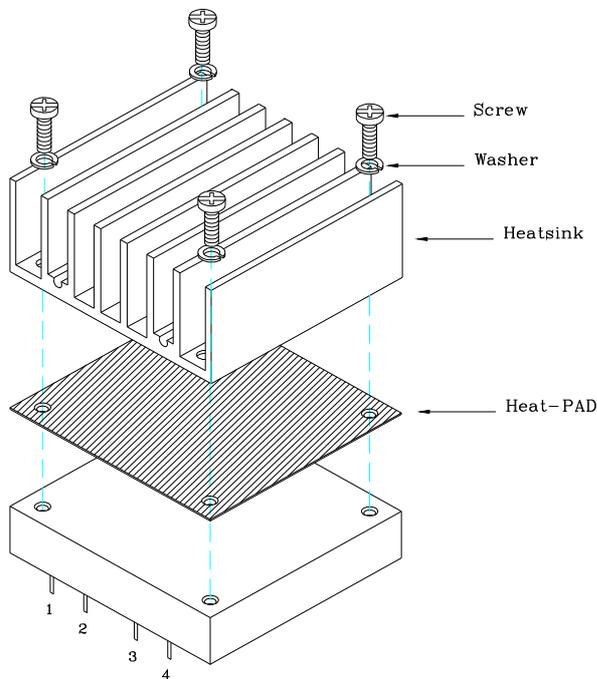






THERMAL PAD: SZ 56.9\*60\*0.25 mm (G6135041091 )  
 SCREW: SMP+SW M3\*8L (G75A1300322 )



# CHB50W Series

## Application Note V18 December 2014







### 6.7 Efficiency VS. Load

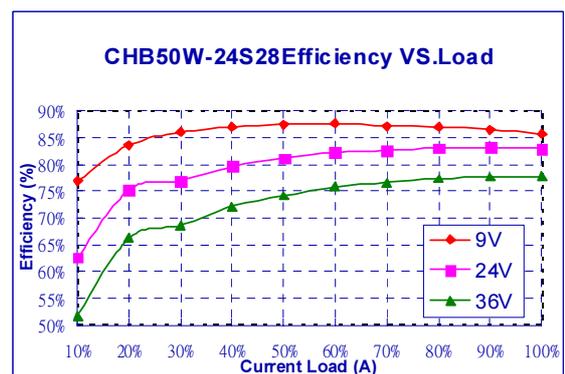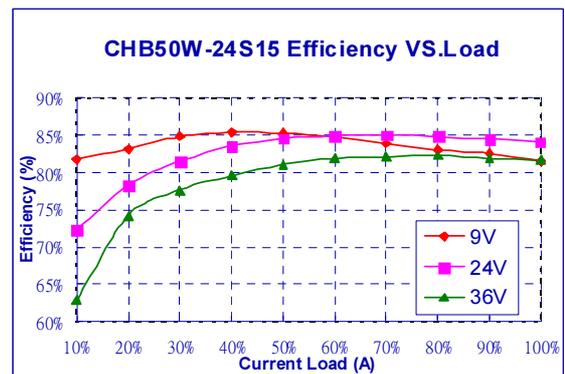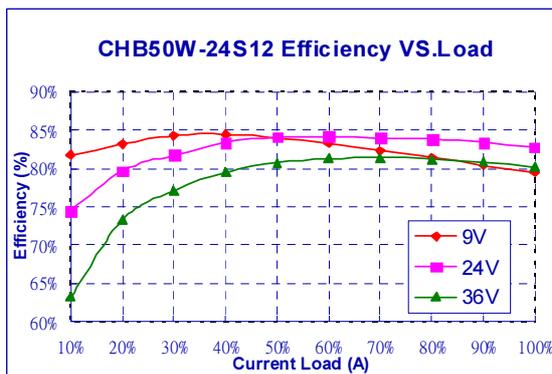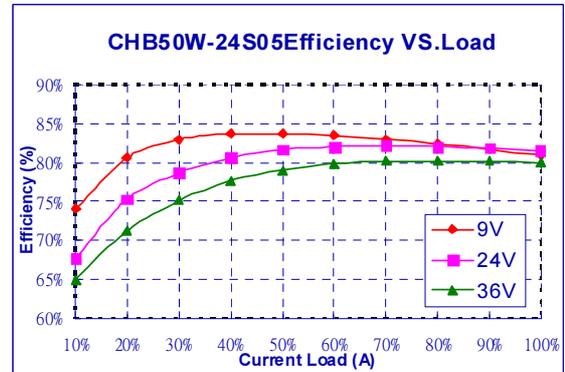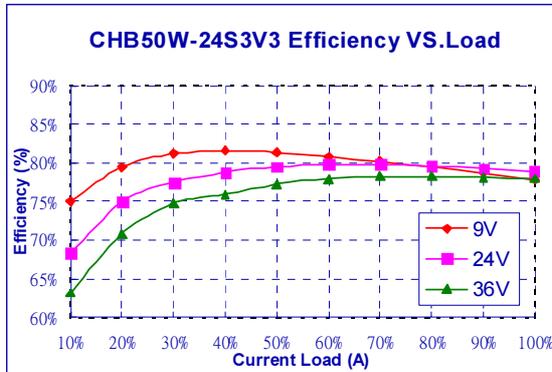



# CHB50W Series



## Application Note V18 December 2014

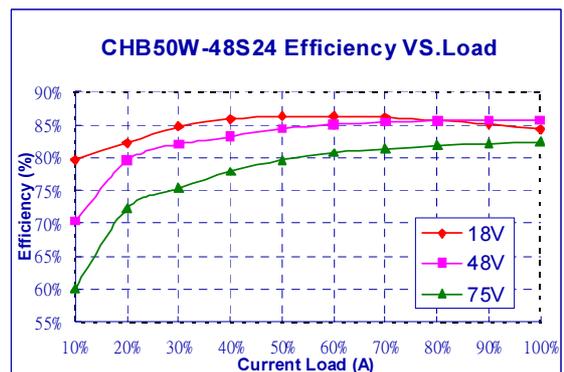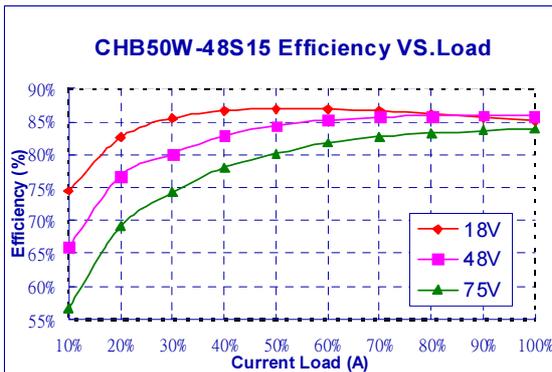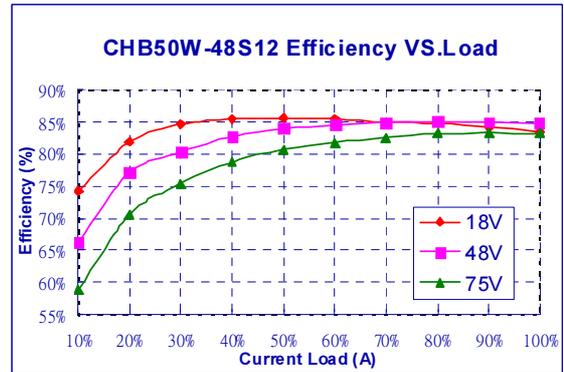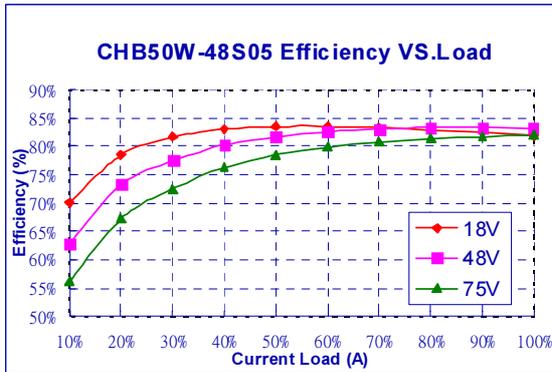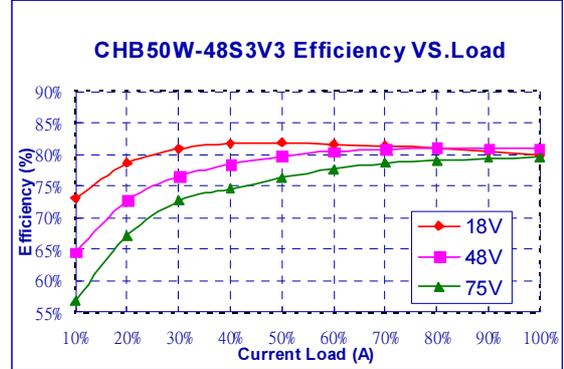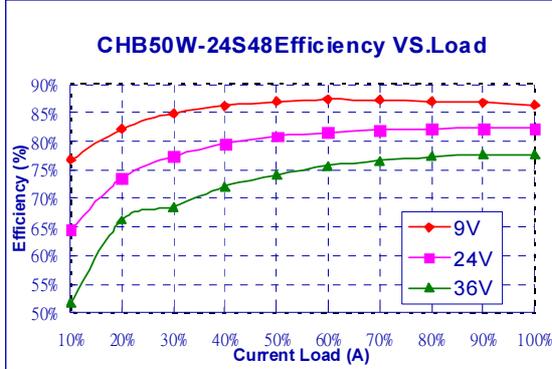



# CHB50W Series

## Application Note V18 December 2014

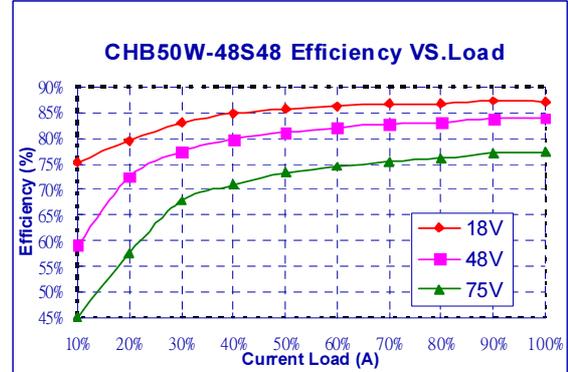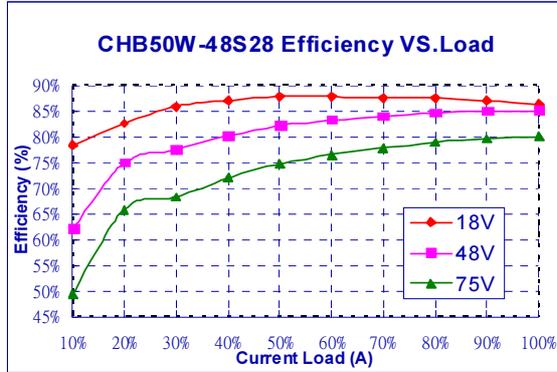



# CHB50W Series

## Application Note V18 December 2014

### 6.8 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown below. When testing the modules under any transient conditions please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate:

- Efficiency
- Load regulation and line regulation.

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{V_{in} \times I_{in}} \times 100\%$$

Where:

$V_o$  is output voltage,  
 $I_o$  is output current,  
 $V_{in}$  is input voltage,  
 $I_{in}$  is input current.

The value of load regulation is defined as:

$$Load.reg = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$


Where:

VFL is the output voltage at full load  
 VNL is the output voltage at no load

The value of line regulation is defined as:

$$Line.reg = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$


Where:  $V_{HL}$  is the output voltage of maximum input voltage at full load.  $V_{LL}$  is the output voltage of minimum input voltage at full load.

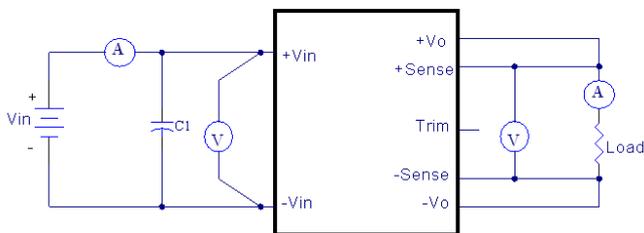


CHB150W Series Test Setup

### 6.9 Output Voltage Adjustment

In order to trim the voltage up or down, one needs to connect the trim resistor either between the trim pin and -Vo for trim-up or between trim pin and +Vo for trim-down. The output voltage trim range is  $\pm 10\%$ . This is shown:

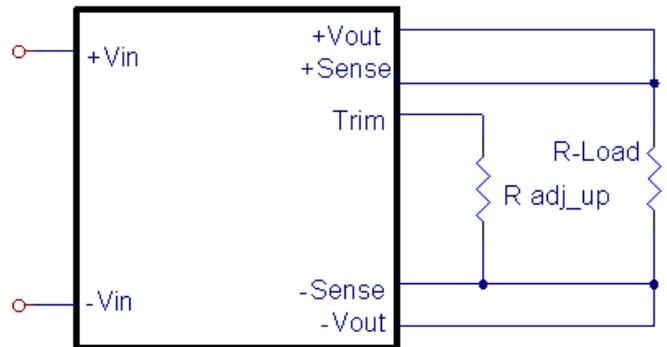

Trim-up Voltage Setup

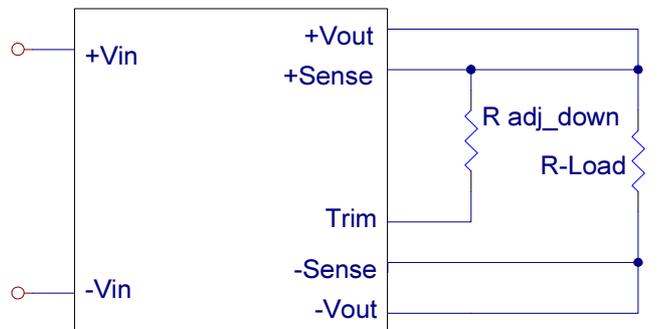

Trim-down Voltage Setup

V <sub>out</sub> (V)	R1 (KΩ)	R2 (KΩ)	R3 (KΩ)	V <sub>r</sub> (V)	V <sub>f</sub> (V)
3.3V	3	12	18	1.24	0.46
5V	2.32	8.2	NC	2.5	0
12V	9.1	51	18	2.5	0.46
15V	12	82	18	2.5	0.46
24V	20	100	20	2.5	0.46
28V	23.7	150	16	2.5	0.46
48V	36	270	14	2.5	0.46

table of trim resistor values



# CHB50W Series

## Application Note V18 December 2014

The value of  $R_{adj\_up}$  defined as:

$$R_{adj\_up} = \left( \frac{R_1(V_r - V_f \left( \frac{R_2}{R_2 + R_3} \right))}{V_o - V_{o\_nom}} \right) - \frac{R_2 R_3}{R_2 + R_3} \quad (\text{K}\Omega)$$

Where:

- $R_{adj\_up}$  is the external resistor in  $\text{K}\Omega$ .
- $V_{o\_nom}$  is the nominal output voltage.
- $V_o$  is the desired output voltage.
- $R_1, R_2, R_3$  and  $V_r$  are internal components and are defined in the table of trim resistor values

For example, to trim-up the output voltage of 5V module (CHB50W-48S05) by 8% to 5.4V,  $R_{adj\_up}$  is calculated as follows:

$$\begin{aligned} V_o - V_{o\_nom} &= 5.4 - 5.0 = 0.4\text{V} \\ R_1 &= 2.32 \text{ K}\Omega, \quad R_2 = 8.2 \text{ K}\Omega, \\ V_r &= 2.5 \text{ V}, \quad V_f = 0 \text{ V} \end{aligned}$$

$$R_{adj\_up} = \frac{5.8}{0.4} - 8.2 = 6.3 \quad (\text{K}\Omega)$$

The value of  $R_{adj\_down}$  defined as:

$$R_{adj\_down} = \frac{R_1 \times (V_o - V_r)}{V_{o\_nom} - V_o} - R_2 \quad (\text{K}\Omega)$$

Where:

- $R_{adj\_down}$  is the external resistor in  $\text{K}\Omega$ .
- $V_{o\_nom}$  is the nominal output voltage.
- $V_o$  is the desired output voltage.
- $R_1, R_2, R_3$  and  $V_r$  are internal components.

For example: to trim-down the output voltage of 12V module (CHB50W-48S05) by 8% to 4.6V,  $R_{adj\_down}$  is calculated as follows:

$$\begin{aligned} V_{o\_nom} - V_o &= 5.0 - 4.6 = 0.4 \text{ V} \\ R_1 &= 2.32 \text{ K}\Omega, \quad R_2 = 8.2 \text{ K}\Omega, \quad V_r = 2.5 \text{ V} \end{aligned}$$

$$R_{adj\_down} = \frac{2.32 \times (4.6 - 2.5)}{0.4} - 8.2 = 3.98 \quad (\text{K}\Omega)$$

### 6.10 Output Remote Sensing


The CHB50W SERIES converter has the capability to remotely sense both lines of its output. This feature moves the effective output voltage regulation point from the output of the unit to the point of connection of the remote sense pins. This feature automatically adjusts the real output voltage of the CHB50W series in order to compensate for voltage drops in distribution and maintain a regulated voltage at the point of load. The remote-sense voltage range is:

$$[(+V_{out}) - (-V_{out})] - [(+Sense) - (-Sense)] \leq$$

10% of  $V_{o\_nominal}$


If the remote sense feature is not to be used, the sense pins should be connected locally. The +Sense pin should be connected to the +Vout pin at the module and the -Sense pin should be connected to the -Vout pin at the module.

This is shown in the schematic below.

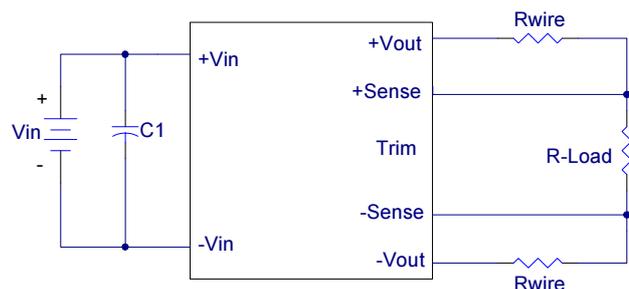

**Note:** Although the output voltage can be varied (increased or decreased) by both remote sense and trim, the maximum variation for the output voltage is the larger of the two values not the sum of the values. The output power delivered by the module is defined as the voltage at the output terminals multiplied by the output current. Using remote sense and trim can cause the output voltage to increase and consequently increase the power output of the module if output current remains unchanged. Always ensure that the output power of the module remains at or below the maximum rated power. Also be aware that if  $V_{o\_set}$  is below nominal value,  $P_{out\_max}$  will also decrease accordingly because  $I_{o\_max}$  is an absolute limit. Thus,  $P_{out\_max} = V_{o\_set} \times I_{o\_max}$  is also an absolute limit.

### 6.11 Output Ripple and Noise

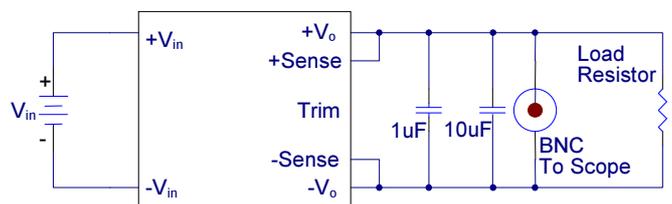

Output ripple and noise is measured with 1.0uF ceramic and 10uF solid tantalum capacitors across the output. (48V: 1uF ceramic capacitors only)



# CHB50W Series

## Application Note V18 December 2014

### 6.12 Output Capacitance


The CHB50W series converters provide unconditional stability with or without external capacitors. For good transient response, low ESR output capacitors should be located close to the point of load. PCB design emphasizes low resistance and inductance tracks in

consideration of high current applications. Output capacitors with their associated ESR values have an impact on loop stability and bandwidth. Cincon's converters are designed to work with load capacitance to see technical specifications.

## 7. Safety & EMC

### 7.1 Input Fusing and Safety Considerations


The CHB50W series converters have no internal fuse. In order to achieve maximum safety and system protection, always use an input line fuse. We recommended a 15A time delay fuse for 24V<sub>in</sub> models, and 8A for 48V<sub>in</sub> models. It is recommended that the circuit have a transient voltage suppressor diode (TVS) across the input terminal to protect the unit against surge or spike voltage and input reverse voltage (as shown).

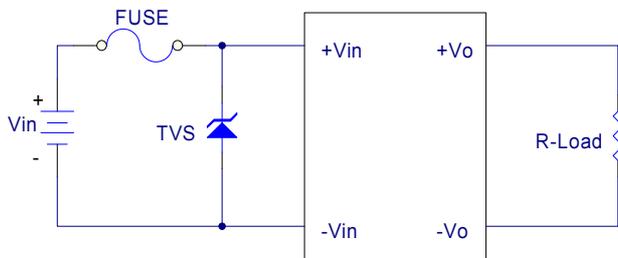

### 7.2 EMC Considerations

#### Suggested Circuits for Conducted EMI Class A & Class B

(1) EMI and conducted noise meet EN55022 Class A specifications:

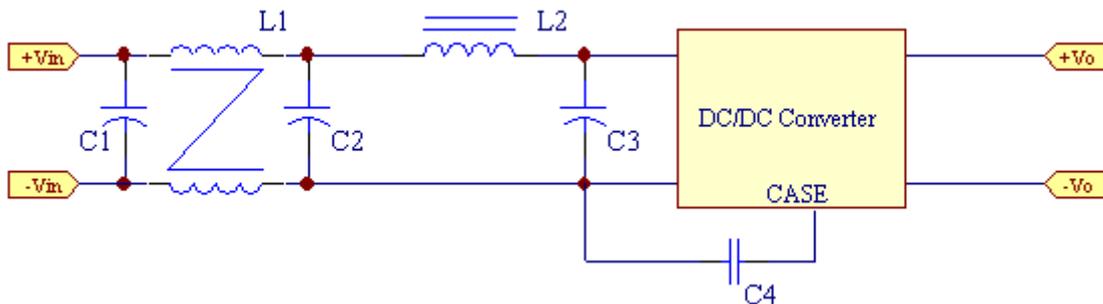

Model No.	C1	C2	C3	C4	L1	L2
CHB50W-24S33	NC	100uF/50V	100uF/50V	2200pF/2KV	Short	3.5uH
CHB50W-24S05	NC	100uF/50V	100uF/50V	2200pF/2KV	Short	3.5uH
CHB50W-24S12	NC	100uF/50V	100uF/50V	2200pF/2KV	Short	3.5uH
CHB50W-24S15	NC	100uF/50V	100uF/50V	2200pF/2KV	Short	3.5uH
CHB50W-24S24	10uF/50V	100uF/50V	100uF/50V	NC	1.5mH	3.4uH
CHB50W-24S28	NC	100uF/50V	100uF/50V	2200pF/2KV	Short	3.4uH
CHB50W-48S33	NC	47uF/100V	47uF/100V	2200pF/2KV	Short	3.4uH
CHB50W-48S05	NC	47uF/100V	47uF/100V	2200pF/2KV	Short	3.4uH
CHB50W-48S12	NC	47uF/100V	47uF/100V	2200pF/2KV	Short	3.4uH
CHB50W-48S15	NC	47uF/100V	47uF/100V	2200pF/2KV	Short	3.4uH
CHB50W-48S28	NC	100uF/100V	100uF/100V	2200pF/2KV	Short	3.4uH
CHB50W-48S24	NC	47uF/100V	47uF/100V	2200pF/2KV	Short	3.4uH


Note: 47uF/100V NIPPON CHEMI-CON KMF series aluminum capacitors, 10uF/50V, C4 is ceramic capacitors. 100uF/50V, 100uF/100V NIPPON CHEMI-CON KY series aluminum capacitors.



# CHB50W Series

## Application Note V18 December 2014


(2) EMI and conducted noise meet EN55022 Class A specifications:

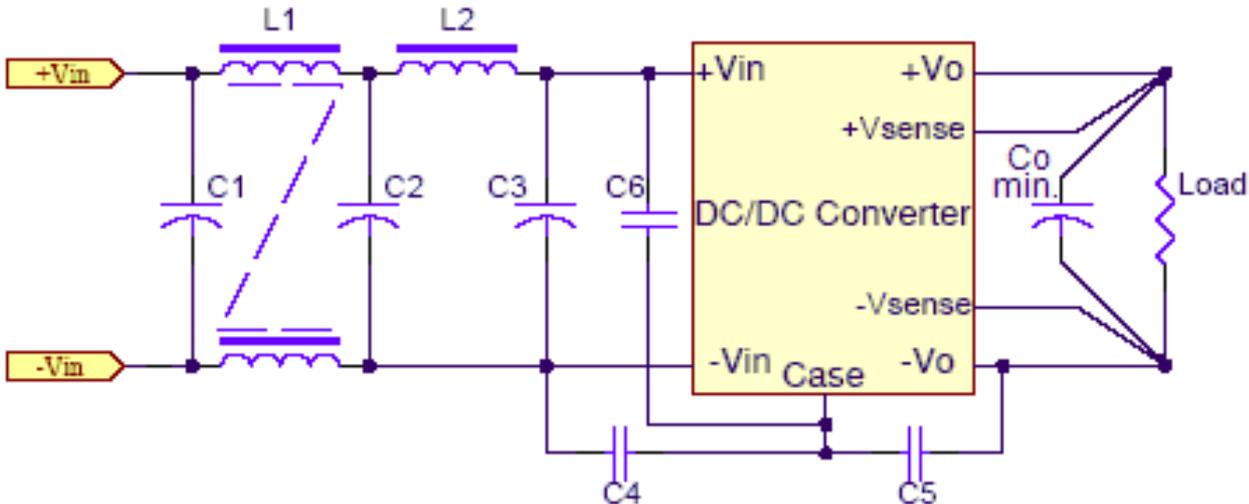

Model No.	C1	C2	C3	C4	C5	C6	L1	L2
CHB50W-24S48	NC	100uF/50V	100uF/50V	NC	NC	NC	Short	3.5uH
CHB50W-48S48	NC	47uF/100V	47uF/100V	2200pF/2KV	NC	NC	Short	3.5uH

Note: C2, C3 NIPPON CHEMI-CON KMF series, C4 is ceramic capacitors, Co min. for Vo: 48V.

(3) EMI and conducted noise meet EN55022 Class B specifications:

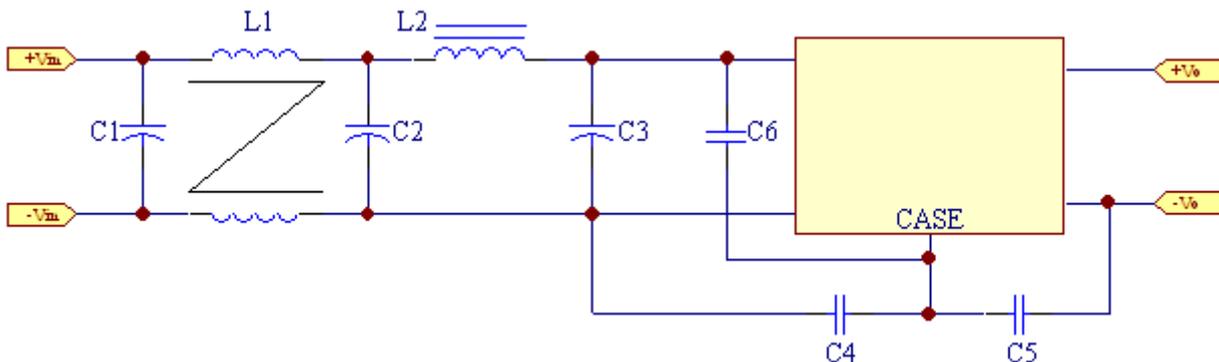

Model No.	C1	C2	C3	C4	C5	C6	L1	L2
CHB50W-24S33	100uF/50V	100uF/50V	100uF/50V	3300pF/2KV	NC	NC	0.65mH	1.5uH
CHB50W-24S05	100uF/50V	100uF/50V	100uF/50V	2200pF/2KV	NC	NC	0.65mH	1.5uH
CHB50W-24S12	100uF/50V	100uF/50V	100uF/50V	3300pF/2KV	NC	NC	0.65mH	1.5uH
CHB50W-24S15	100uF/50V	100uF/50V	100uF/50V	2200pF/2KV	NC	NC	0.65mH	1.5uH
CHB50W-24S24	10uF/50V	100uF/50V	100uF/50V	2200pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
CHB50W-48S33	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
CHB50W-48S05	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
CHB50W-48S12	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
CHB50W-48S15	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH
CHB50W-48S24	47uF/100V	47uF/100V	47uF/100V	3300pF/2KV	3300pF/2KV	1000pF/2KV	1.5mH	3.4uH


Note: 100uF/50V, 47uF/100V NIPPON CHEMI-CON KMF series aluminum capacitors, 10uF/50V, C4, C5, C6 is ceramic capacitors.



# CHB50W Series

## Application Note V18 December 2014


(4) EMI and conducted noise meet EN55022 Class B specifications:

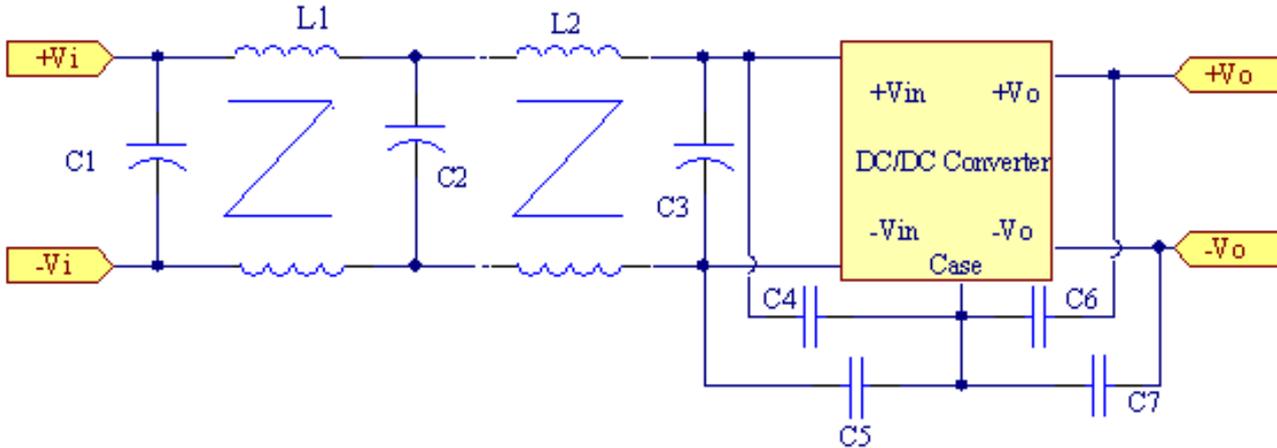

Model No.	C1	C2	C3	C4	C5	C6	C7	L1	L2
CHB50W-24S28	100uF/50V	100uF/50V	NC	NC	1000pF/2KV	NC	NC	0.12mH	0.34mH
CHB50W-48S28	100uF/100V	100uF/100V	NC	NC	1000pF/2KV	NC	NC	0.12mH	0.34mH

Note: C1, C2 NIPPON CHEMI-CON KY series, C5 is ceramic capacitors.

(5) EMI and conducted noise meet EN55022 Class B specifications:

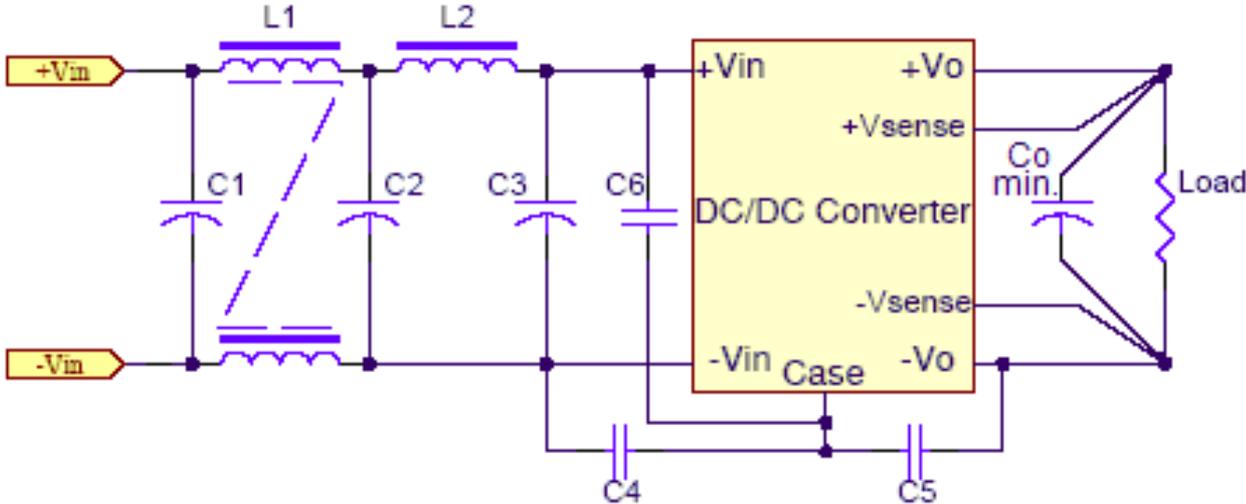

Model No.	C1	C2	C3	C4	C5	C6	L1	L2
CHB50W-24S48	10uF/50V	100uF/50V	100uF/50V	4700pF/2KV	2200pF/2KV	1000pF/2KV	1.5mH	3.4uH
CHB50W-48S48	47uF/100V	47uF/100V	47uF/100V	4700pF/2KV	2200pF/2KV	1000pF/2KV	1.5mH	3.4uH

Note: 100uF/50V, 47uF/100V NIPPON CHEMI-CON KMF series, 10uF/50V, C5, C6 is ceramic capacitors, Co min. for Vo: 48V.



# CHB50W Series

## Application Note V18 December 2014

### 8. Part Number

Format: CHB50W – II X OO L-Y

Parameter	Series	Nominal Input Voltage	Number of Outputs	Output Voltage	Remote ON/OFF Logic	Mounting Inserts
Symbol	CHB50W	II	X	OO	L	Y (Option)
Value	CHB50W	24: 24 Volts 48: 48 Volts	S: Single	33: 3.3 Volts 05: 05 Volts 12: 12 Volts 15: 15 Volts 24: 24 Volts 28: 28 Volts 48: 48 Volts	None: Positive N: Negative	C: Clear Mounting Insert (3.2mm DIA.)

### 9. Mechanical Specifications


#### 9.1 Mechanical Outline Diagrams

CASE HB

All Dimensions In Inches(mm)

Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

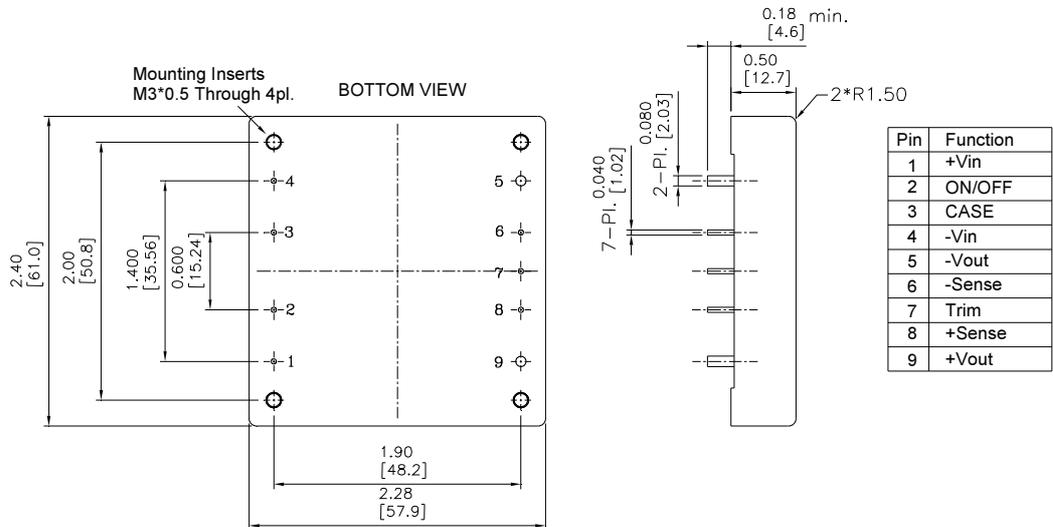

### CINCON ELECTRONICS CO., LTD.

#### Headquarters:

14F, No.306, Sec.4, Hsin Yi Rd.  
Taipei, Taiwan  
Tel: 886-2-27086210  
Fax: 886-2-27029852  
E-mail: [support@cincon.com.tw](mailto:support@cincon.com.tw)  
Web Site: <http://www.cincon.com>

#### Factory:

No. 8-1, Fu Kung Rd.  
Fu Hsing Industrial Park  
Fu Hsing Hsiang,  
Chang Hua Hsien, Taiwan  
Tel: 886-4-7690261  
Fax: 886-4-7698031

#### Cincon North America:

1655 Mesa Verde Ave. Ste 180  
Ventura, CA 93003  
Tel: 805-639-3350  
Fax: 805-639-4101  
E-mail: [info@cincon.com](mailto:info@cincon.com)