

# ULTRAVOLT D SERIES

## MICRO-SIZED HIGH VOLTAGE BIASING SUPPLIES

The D series of high voltage power supplies is designed to meet the needs of customers with low-profile, < 13 mm (< 0.511") or < 17.5 mm (< 0.689") applications at 1 to 6 W. These ultra-compact modules are ideal for detectors that require high-bias voltages and currents at low ripple. D series PCB-mount high voltage power supplies feature a lightweight design, state-of-the-art surface-mount technology, and five-sided metal enclosures.

### PRODUCT HIGHLIGHTS

- 4 models from 0 to 1 kV through 0 to 6 kV
- 1, 2, 4 or 6 W output power
- Low ripple (< 0.02% peak to peak)
- Tight line/load regulation
- Output current limit protection
- Adjustable from 0 to full output
- Buffered voltage and current monitoring
- 15 or 24 VDC Input
- Low profile and lightweight
- PCB flat mounting

### TYPICAL APPLICATIONS

- Scanning electron microscopes (SEM)
- Mass spectrometry
- Gas chromatography
- Spectrometers
- Electrostatic chuck (e-chuck)
- PZT drivers
- Pulse generators
- Laser electro-optic modulation
- Fiber-optic telecom detectors
- Particle physics detectors
- Laser range finder detectors
- Detectors
- Geiger-Muller tubes (GM)
- Avalanche photo diodes (APD)
- Photo multiplier tubes (PMT)
- Photodiodes (PD)
- Multi-pixel photon counters (MPPC)
- Channel electron multipliers
- Silicon detectors (SiD)
- Silicon photomultipliers (SiPM)
- Image intensifiers (II and IIT)
- Microchannel plates (MCP)
- Ionization chamber detectors
- Thin-film bias
- High voltage testing
- ATE leakage testing
- General laboratory
- Bias supplies

**ELECTRICAL SPECIFICATIONS**

Parameters	Specifications	Units
Input Voltage Vin (Pins 2 and 3)	15 VDC ±1.5 V or 24 VDC ±2 V, according to type	VDC
Input Current	Example for a 15 VDC, output 6000 V, 1 mA model: inhibition mode: 27 mA at no load and HV = 6000 V 46 mA, at full load < 630 mA	
Polarity	Fixed positive or negative	-
Output Voltage	0 to 1000                      0 to 2000                      0 to 4000                      0 to 6000	VDC
Output Power	1    2    4    6    1    2    4    6    1    2    4    6    1    2    4    6	W
Output Current	1    2    4    6    0.5    1    2    3    0.25    0.5    1    1.5    0.17    0.33    0.67    1	mA
Programming (Pins 4 and 6)	Via external voltage source 0 to +5 V ±0.1% at full scale, and input impedance = 94 kΩ	-
Max Output Current Iout	Limited to 110% of nominal current	-
Load Voltage Regulation	±0.01% of full output voltage for no load to full load	VDC
Line Voltage Regulation	±0.01% of full output voltage over specified input voltage range	VDC
Residual Ripple	< 0.02% at full load	V pk to pk
Temperature Coefficient	100	PPM/°C
Output HV Monitoring (Pin 7) {still operating in inhibition mode}	Analog 0 to +5 V buffered output signal, accuracy ±0.2%	-
	Output impedance = 1 kΩ	
	Temperature coefficient: 50 ppm/°C for ≤ 4 kV units, 100 ppm/°C for 6 kV units	
Output Current Monitoring (Pin 5) {still operating in inhibition mode}	Analog 0 to +5 V buffered output signal, accuracy ±2%	-
	Output impedance = 1 kΩ	
	Temperature coefficient: 100 ppm/°C	
HV ON/OFF (Pin 1)	To disable (opened remote interlock) or enable (closed remote interlock)	-
Operating Temperature	-10 to +65, full load, max Eout, Tcase temp	°C
Storage Temperature	-10 to +70	°C
Safeguards	Protected against reverse Vin	-
	Soft start feature: the start is guaranteed with no overshoot	
	Auto inhibition if case > 75°C	
	HV setting internally limited to 5.3 V	

MECHANICAL SPECIFICATIONS

Construction	
Casing	Tin steel plate, thickness 0.5 mm
Insulation	Fully potted in an epoxy resin


Volume and Weights		
Volume	cm <sup>3</sup>	in <sup>3</sup>
1 to 4 kV, 1 to 4 W	36.2	2.21
1 to 4 kV, 6 W and 1 to 6 kV, 1 to 6 W	48.6	2.97
Weight	g	oz
1 to 4 kV, 1 to 4 W	72	2.54
1 to 4 kV, 6 W and 1 to 6 kV, 1 to 6 W	85	3

Dimensions <sup>1, 2</sup>	
Tolerance	
Overall	±0.3 mm (0.0118")
Pin to Pin	±0.1 mm (0.0039")
Case to Pin	±1.5 mm (0.0591")



<sup>1</sup> Standard case length, width, and height specs are 1.27 mm (0.050")

<sup>2</sup> Pin length > 6 mm (0.24"), spacing 2.54 mm (0.1")

1 to 4 kV, 1 to 4 W

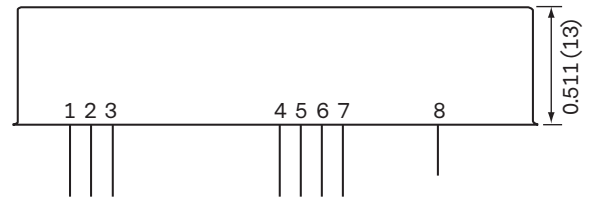

1 to 4 kV, 6 W and 1 to 6 kV, 1 to 6 W

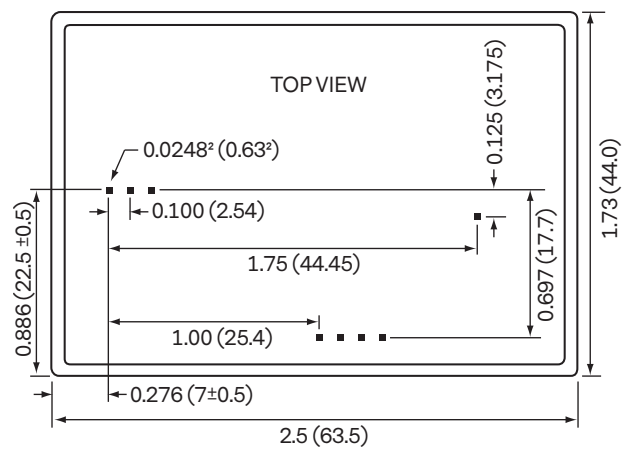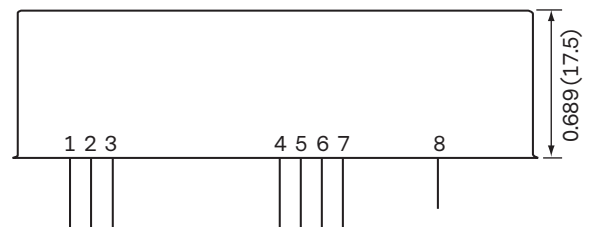

## ULTRAVOLT D SERIES


### INTERFACE CONTROL PARAMETERS

Connections	
Pin	Function
1	Enable/Disable
2	Power Ground
3	Positive Power Input
4	Signal Ground
5	Iout Monitor
6	Remote Adjust Input
7	Eout Monitor
8	HV Output

ORDERING INFORMATION

Type	0 to 1000 VDC Output	1D
	0 to 2000 VDC Output	2D
	0 to 4000 VDC Output	4D
	0 to 6000 VDC Output	6D
Input	15 VDC Nominal	15
	24 VDC Nominal	24
Power	W Output	1
	W Output	2
	W Output	4
	W Output	6
Case	Steel, Tin-plated	(Standard)
Polarity	Positive Output	-P
	Negative Output	-N

The D series is not available in all territories. Please contact Advanced Energy for details concerning sales in your area.





For international contact information,  
visit [advanced-energy.com](http://advanced-energy.com).

[uv-ca@aei.com](mailto:uv-ca@aei.com)  
+1.970.221.0108

## ABOUT ADVANCED ENERGY

Since 1981, UltraVolt® — now part of the Advanced Energy (AE) family — has perfected how power performs for its customers. For both end users and OEMs, AE's comprehensive portfolio of standard and custom high voltage components precisely match system specifications to deliver unparalleled energy, quality, and performance. Through close customer collaboration, design expertise, application insight, and world-class support, AE creates successful partnerships and enables customers to push the boundaries of innovation and stay ahead of evolving market needs.

PRECISION | POWER | PERFORMANCE



**CAUTION:**  
High Voltage

Read and understand all documentation before you install, operate, or maintain Advanced Energy high voltage power supplies. Follow all safety instructions and precautions to protect against property damage and serious or possibly fatal bodily injury. Never defeat safety interlocks or grounds.

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2018 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE®, and UltraVolt® are U.S. trademarks of Advanced Energy Industries, Inc.

