

## DESCRIPTIONS

240W, AC/DC DIN-Rail Power Supply



RoHS



Report



Report

EN62368-1

BS EN62368-1

## FEATURES

- Universal 85 - 277VAC or 120 - 390VDC Input voltage
- Efficiency up to 95.5%
- Operating ambient temperature range: -40°C to +85°C
- 150% peak load
- Active PFC, PF > 0.99
- DC OK function
- Double-sided conformal coating, salt-spray proof, explosion-proof
- Operating altitude up to 5000m
- OVC III(design refer to EN62477, 2000m)
- Output short circuit, over-current, over-voltage, over-temperature protection
- Safety according to ATEX, IECEx increased safety type explosion-proof certification
- Meets ANSI/ISA 71.04-2013 G3 corrosion test
- Safety according to IEC/UL62368, UL508
- 5 years warranty

## APPLICATIONS

- Industry
- DCS
- Industrial control equipment
- Machine control
- LED
- 5G communication

## Selection Guide

| Certification | Part No*      | Output Power (W) | Nominal Output Voltage and Current (Vo/Io) | Output Voltage Adjustable Range (V) | Efficiency at 230VAC (%) Typ. | Max. Capacitive Load (μF) |
|---------------|---------------|------------------|--------------------------------------------|-------------------------------------|-------------------------------|---------------------------|
| EN/BS EN      | ADMF240-2B-12 | 192              | 12V/16A                                    | 12.0-14.0                           | 94                            | 100000                    |
|               | ADMF240-2B-24 | 240              | 24V/10A                                    | 24.0-28.0                           | 95.5                          | 50000                     |
|               | ADMF240-2B-48 |                  | 48V/5A                                     | 48.0-53.0                           |                               | 25000                     |

Note:1. \*When the output voltage rises, the total power of the product should not exceed the rated power;

2.\*Please refer to the derating curve, when the 48V output voltage is adjusted to 53V - 56V;

3.\*This product is suitable for indoor use.

4.\*The product picture is for reference only, for details, please refer to the actual product.

## Specifications

| Product Characteristics | Item                                       | Operating Conditions            |            | Min.          | Typ.  | Max. | Unit             |
|-------------------------|--------------------------------------------|---------------------------------|------------|---------------|-------|------|------------------|
| Input Specifications    | Input Voltage Range                        | Rated input (Certified voltage) |            | 100           | --    | 240  | VAC              |
|                         |                                            | AC input                        |            | 85            | --    | 277  |                  |
|                         |                                            | DC input                        |            | 120           | --    | 390  | VDC              |
|                         | Maximum Input Voltage                      | Lasts for 2h without damage     |            | --            | --    | 305  | VAC              |
|                         | Input Voltage Frequency                    |                                 |            | 47            | --    | 63   | Hz               |
|                         | Input Switching Voltage                    |                                 |            | --            | 80    | --   | VAC              |
|                         | Input Turn-off Voltage                     |                                 |            | --            | 60    | --   |                  |
|                         | Input Current                              | 115VAC                          |            | --            | --    | 3    | A                |
|                         |                                            | 230VAC                          |            | --            | --    | 1.5  |                  |
|                         | Inrush Current                             | 115VAC                          | Cold start | --            | 14    | --   |                  |
|                         |                                            | 230VAC                          |            | --            | 26    | --   |                  |
|                         | Inrush Current Integral (I <sup>2</sup> t) | 115VAC                          |            | --            | 0.25  | --   | A <sup>2</sup> s |
|                         |                                            | 230VAC                          |            | --            | 0.867 | --   |                  |
|                         | Power Factor                               | Rated load                      | 115VAC     | --            | 0.99  | --   | --               |
|                         |                                            |                                 | 24V/48V    | --            |       | --   |                  |
|                         |                                            |                                 | 12V        | --            | 0.98  | --   |                  |
|                         | THD                                        | 230VAC, rated load              |            | --            | 3     | --   | %                |
|                         | Start-up Delay Time                        | 115VAC/230VAC, rated load       |            | --            | 520   | --   | ms               |
|                         | Rise Time                                  |                                 |            | --            | 19    | --   |                  |
|                         | Input Fuse                                 | Built-in fuse                   |            | --            | 8     | --   | A                |
|                         | DC OK Signal                               | Resistive load                  |            | 30VDC/1A Max. |       |      |                  |
|                         | Hot Plug                                   |                                 |            | Unavailable   |       |      |                  |
| Output Specifications   | Output Voltage Accuracy                    | Full load range                 |            | --            | ±1.0  | --   | %                |
|                         | Line Regulation                            | Rated load                      |            | --            | ±0.25 | --   |                  |
|                         | Load Regulation                            | 0% - 100% load                  |            | --            | ±0.5  | --   |                  |

|                              |                           |                    |                                         |  |         |                                                                                              |      |     |    |
|------------------------------|---------------------------|--------------------|-----------------------------------------|--|---------|----------------------------------------------------------------------------------------------|------|-----|----|
| Output Specifications        | Power Consumption*        |                    | 230VAC, rated load                      |  | 12V     | --                                                                                           | 11.5 | --  | W  |
|                              |                           |                    |                                         |  | 24V/48V | --                                                                                           | 10.8 | --  |    |
|                              | Ripple & Noise*           |                    | 20MHz bandwidth<br>(peak-to-peak value) |  | 12V/48V | --                                                                                           | --   | 150 | mV |
|                              |                           |                    |                                         |  | 24V     | --                                                                                           | --   | 100 |    |
|                              | Hold-up Time              |                    |                                         |  |         | --                                                                                           | 37   | --  | ms |
|                              | Over-current Protection*  |                    | 115VAC/230VAC                           |  |         | 110                                                                                          | 150  | --  | %  |
|                              | Short Circuit Protection* |                    | 115VAC/230VAC                           |  |         | Hiccup mode, constant current works 1s<br>(Typ.), turn off 10s, continuous,<br>self-recovery |      |     |    |
|                              | Over-voltage Protection   |                    | 12V                                     |  |         | ≤18VDC (Hiccup, self-recovery)                                                               |      |     |    |
|                              |                           |                    | 24V                                     |  |         | ≤35VDC (Hiccup, self-recovery)                                                               |      |     |    |
|                              |                           |                    | 48V                                     |  |         | ≤60VDC (Hiccup, self-recovery)                                                               |      |     |    |
| Over-temperature Protection* |                           | 230VAC, rated load | Over-temperature protection start       |  | --      | --                                                                                           | 105  | °C  |    |
|                              |                           |                    | Over-temperature protection release     |  | 60      | --                                                                                           | --   |     |    |

|                        |                       |                                                                                              |                                                                                                                                                                                                          |                                                                                             |                |         |          |     |        |         |
|------------------------|-----------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------|---------|----------|-----|--------|---------|
| General Specifications | Isolation Test*       | Input -     | Electric strength test for 1min., leakage current <5mA (Isolation Test need to remove the screw at the mark shall  *) |                                                                                             |                | 2500    | --       | --  | VAC    |         |
|                        |                       | Input - output                                                                               |                                                                                                                                                                                                          |                                                                                             |                | 4000    | --       | --  |        |         |
|                        |                       | Output -  |                                                                                                                                                                                                          |                                                                                             |                | 500     | --       | --  |        |         |
|                        |                       | DC OK - output                                                                               |                                                                                                                                                                                                          |                                                                                             |                | 500     | --       | --  |        |         |
|                        | Insulation Resistance | Input -   | At 500VDC                                                                                                                                                                                                |                                                                                             |                | 500     | --       | --  | MΩ     |         |
|                        |                       | Input - output                                                                               |                                                                                                                                                                                                          |                                                                                             |                | 500     | --       | --  |        |         |
|                        |                       | Output -  |                                                                                                                                                                                                          |                                                                                             |                | 500     | --       | --  |        |         |
|                        | Operating Temperature |                                                                                              |                                                                                                                                                                                                          |                                                                                             |                | -40     | --       | +85 | °C     |         |
|                        | Storage Temperature   |                                                                                              |                                                                                                                                                                                                          |                                                                                             |                | -40     | --       | +85 |        |         |
|                        | Operating Humidity    |                                                                                              | Non-condensing                                                                                                                                                                                           |                                                                                             |                | 5       | --       | 95  | %RH    |         |
|                        | Storage Humidity      |                                                                                              |                                                                                                                                                                                                          |                                                                                             |                | 5       | --       | 90  |        |         |
|                        | Switching Frequency*  |                                                                                              | PFC                                                                                                                                                                                                      |                                                                                             |                | 40      | --       | 130 | kHz    |         |
|                        |                       |                                                                                              | DC-DC                                                                                                                                                                                                    |                                                                                             |                | 50      | --       | 130 |        |         |
|                        |                       |                                                                                              | Auxiliary source                                                                                                                                                                                         |                                                                                             |                | --      | 65       | --  |        |         |
|                        | Power Derating        |                                                                                              | Operating temperature derating                                                                                                                                                                           |                                                                                             | -40°C to -25°C | 3.34    | --       | --  | % / °C |         |
|                        |                       |                                                                                              |                                                                                                                                                                                                          |                                                                                             | +60°C to +70°C | 3.75    | --       | --  |        |         |
|                        |                       |                                                                                              |                                                                                                                                                                                                          |                                                                                             | +70°C to +85°C | 3.17    | --       | --  |        |         |
|                        |                       |                                                                                              | Input voltage derating                                                                                                                                                                                   |                                                                                             | 85VAC - 100VAC |         | 1        | --  | --     | % / VAC |
|                        |                       |                                                                                              | Output voltage derating                                                                                                                                                                                  | 48V                                                                                         | 53VDC-56VDC    |         | 6.67     | --  | --     | % / VDC |
|                        | Leakage Current       |                                                                                              | 240VAC                                                                                                                                                                                                   | Input - output                                                                              |                |         | < 0.5mA  |     |        |         |
|                        |                       |                                                                                              |                                                                                                                                                                                                          | Input -  |                |         | < 0.88mA |     |        |         |
|                        | Safety Class          |                                                                                              |                                                                                                                                                                                                          |                                                                                             |                | CLASS I |          |     |        |         |

|                                                                                                                                                                                                                                                                                                                                        |                                     |                                                                         |                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------------|---------------------------------|
| Environmental Characteristics                                                                                                                                                                                                                                                                                                          | MTBF                                | MIL-HDBK-217F@25°C                                                      | 980,000 h                       |
|                                                                                                                                                                                                                                                                                                                                        |                                     | MIL-HDBK-217F@40°C                                                      | 878,000 h                       |
|                                                                                                                                                                                                                                                                                                                                        | Pollution degree                    |                                                                         | 2                               |
|                                                                                                                                                                                                                                                                                                                                        | Warranty                            | Ambient temperature: <40°C                                              | 5 years                         |
|                                                                                                                                                                                                                                                                                                                                        | High and Low Voltage Crossing       | Test with UPS                                                           | NB/T 31111-2017                 |
|                                                                                                                                                                                                                                                                                                                                        | High and Low Temperature Working    | +85°C, -40°C                                                            | GB2423.1, IEC60068-2-1          |
|                                                                                                                                                                                                                                                                                                                                        | Sinusoidal Vibration                | 10 - 500Hz, 2g, three directions of X, Y, Z axis                        | GB2423.10, IEC60068-2-6         |
|                                                                                                                                                                                                                                                                                                                                        | Salt Mist                           | +35°C, 5%NACL, 48h                                                      | GB2423.17, IEC60068-2-11        |
|                                                                                                                                                                                                                                                                                                                                        | Alternating Hot and Humid           | +25°C, 95%RH - +60°C, 95%RH                                             | GB2423.4, IEC60068-2-30         |
|                                                                                                                                                                                                                                                                                                                                        | Low Temperature Storage             | -40°C                                                                   | GB2423.1, IEC60068-2-1          |
|                                                                                                                                                                                                                                                                                                                                        | High Temperature Storage            | +85°C                                                                   | GB2423.2, IEC60068-2-2          |
|                                                                                                                                                                                                                                                                                                                                        | High Temperature Aging              | +60°C                                                                   | GB2423.2, IEC60068-2-2          |
|                                                                                                                                                                                                                                                                                                                                        | Normal Temperature Aging            | +25°C                                                                   | GB2423.1, IEC60068-2-1          |
|                                                                                                                                                                                                                                                                                                                                        | Temperature Shock                   | -40°C to +85°C                                                          | GB2423.22, IEC60068-2-14        |
|                                                                                                                                                                                                                                                                                                                                        | Temperature Cycle                   | -25°C to +60°C                                                          | GB2423.22, IEC60068-2-14        |
|                                                                                                                                                                                                                                                                                                                                        | Hot and Humid                       | +85°C, 85%RH                                                            | GB2423.50, IEC60068-2-67        |
|                                                                                                                                                                                                                                                                                                                                        | High Temperature Elevation          | +60°C, 54KPa                                                            | GB2423.26, IEC60068-2-41        |
|                                                                                                                                                                                                                                                                                                                                        | Low Temperature Elevation           | -25°C, 54KPa                                                            | GB2423.25, IEC60068-2-40        |
|                                                                                                                                                                                                                                                                                                                                        | Constant Humid and Hot              | +40°C, 95%RH                                                            | GB2423.3, IEC60068-2-78         |
|                                                                                                                                                                                                                                                                                                                                        | Random Vibration                    | 5 - 10Hz, ASD 0.3 - 10g²/Hz, three directions of X, Y, Z axis           | GB/T 4798.2-2008, IEC60721-3-2  |
|                                                                                                                                                                                                                                                                                                                                        | Sinusoidal Vibration Response       | 10 - 150Hz, 1g, three directions of X, Y, Z axis                        | GB/T 11287-2000, IEC60255-21-1  |
|                                                                                                                                                                                                                                                                                                                                        | Sinusoidal Vibration Endurance Test |                                                                         |                                 |
|                                                                                                                                                                                                                                                                                                                                        | Sinusoidal Impulse Response         | 15g, pulse duration 11ms, three times in each direction of X, Y, Z axis | GB/T 114537-1993, IEC60255-21-2 |
|                                                                                                                                                                                                                                                                                                                                        | Sinusoidal Impact Endurance Test    |                                                                         |                                 |
|                                                                                                                                                                                                                                                                                                                                        | Packaging Drop                      | 1m, one corner, three edges and six sides                               | GB2423.8, IEC68-2-32            |
| Mechanical Specifications                                                                                                                                                                                                                                                                                                              | Case Material                       | Metal (AL5052, SUS304)                                                  |                                 |
|                                                                                                                                                                                                                                                                                                                                        | Dimensions                          | 124.00mm × 121.00mm × 48.00mm                                           |                                 |
|                                                                                                                                                                                                                                                                                                                                        | Weight                              | 870g (Typ.)                                                             |                                 |
|                                                                                                                                                                                                                                                                                                                                        | Cooling Method                      | Free air convection                                                     |                                 |
| Note: 1. *The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor;                                                                                                                                                                                      |                                     |                                                                         |                                 |
| 2.*Over-temperature protection: Put the product into a high temperature box. After the ambient temperature stabilizes, increase the temperature slightly (3°C to 5°C), and the load remains unchanged. After the product reaches thermal equilibrium, increase the temperature until the product triggers over-temperature protection; |                                     |                                                                         |                                 |
| 3.*Power consumption curve, over-current protection mode and short circuit protection mode see product characteristic curve.                                                                                                                                                                                                           |                                     |                                                                         |                                 |
| 4. *The gas discharge tube built into the device effectively protects the power supply against damage by asymmetric disturbance variables (eg EN                                                                                                                                                                                       |                                     |                                                                         |                                 |

61000-4-5). Each power supply continuous withstand voltage test will cause extremely high load to the power supply. Therefore, unnecessary loading or damage to the power supply due to excessive test voltage should be avoided. If necessary, disconnect the gas discharge tube built into the device to use a higher test voltage. After successful completion of the test, reconnect the gas discharge tube. Please refer to the "LIMF240-23Bxx Installation and Application Manual" for specific operation methods;

5. \*The power supply has three converters with three different switching frequencies. Auxiliary source frequency is nearly constant, other switching frequencies depend on input voltage and load.

### Electromagnetic Compatibility (EMC)

|                                                   |                        |                             |                  |                                       |                     |
|---------------------------------------------------|------------------------|-----------------------------|------------------|---------------------------------------|---------------------|
| Electromagnetic<br><br>Compatibility<br><br>(EMC) | Emissions<br><br>(EMI) | CE (Input port)             | CISPR32 EN55032  | 150K - 30MHz                          | CLASS B             |
|                                                   |                        | CE (Output port)            | CISPR32 EN55032  | 150K - 30MHz                          | CLASS A             |
|                                                   |                        | RE                          | CISPR32 EN55032  | 30MHz - 2GHz                          | CLASS B             |
|                                                   |                        | Harmonic current            | IEC/EN61000-3-2  |                                       | CLASS A and CLASS D |
|                                                   |                        | Voltage flicker             | EN61000-3-3      |                                       |                     |
|                                                   | Immunity<br><br>(EMS)  | ESD                         | IEC/EN61000-4-2  | Contact ±8KV/Air ±15KV                | perf. Criteria A    |
|                                                   |                        | RS                          | IEC/EN61000-4-3  | 20V/m                                 |                     |
|                                                   |                        | EFT (Input port)            | IEC/EN61000-4-4  | ±4KV                                  |                     |
|                                                   |                        | EFT (Output port)           | IEC/EN61000-4-4  | ±2kv                                  |                     |
|                                                   |                        | Surge (Input port)          | IEC/EN61000-4-5  | L to N ±3KV/L or N to PE ±6KV         |                     |
|                                                   |                        | Surge (Output port)         | IEC/EN61000-4-5  | line to line ±1KV/line to ground ±2KV |                     |
|                                                   |                        | MS                          | IEC/EN61000-4-8  | 30A/m                                 |                     |
|                                                   |                        | AC power port harmonics     | IEC61000-4-13    | CLASS 3                               |                     |
|                                                   |                        | Harmonic and network signal |                  |                                       |                     |
|                                                   |                        | Low frequency immunity      |                  |                                       |                     |
|                                                   |                        | CS                          | IEC/EN61000-4-6  | 0.15 - 80MHz 20Vr.m.s                 |                     |
|                                                   |                        | Voltage dips                | IEC/EN61000-4-11 | 0% of 100Vac, 0Vac, 20ms              | perf. Criteria A    |
|                                                   |                        |                             |                  | 40% of 100Vac, 40Vac, 200ms           | perf. Criteria C    |
|                                                   |                        |                             |                  | 70% of 100Vac, 70Vac, 500ms           | perf. Criteria A    |
|                                                   |                        |                             |                  | 0% of 200Vac, 0Vac, 20ms              | perf. Criteria A    |
|                                                   |                        |                             |                  | 40% of 200Vac, 80Vac, 200ms           | perf. Criteria A    |
|                                                   |                        |                             |                  | 70% of 200Vac, 140Vac, 500ms          | perf. Criteria A    |
|                                                   |                        | Voltage interruption        | IEC/EN61000-4-11 | 0% of 200Vac, 0Vac, 5000ms            | perf. Criteria C    |




Note:\* perf.Criteria:

A: The equipment shall continue to operate as intended without operator intervention;


B: After the test, the equipment shall continue to operate as intended without operator intervention;

C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.


## Characteristic Curve

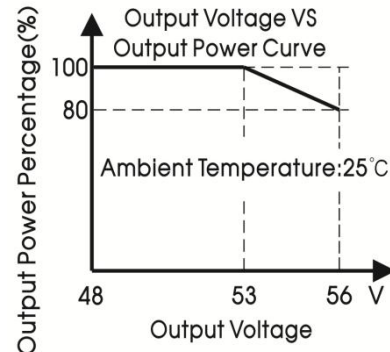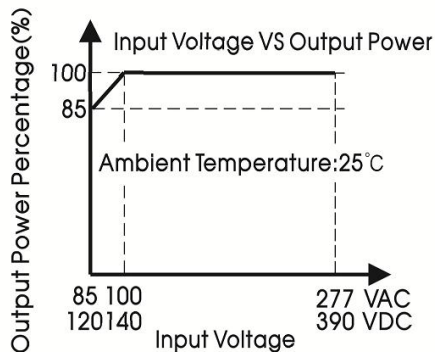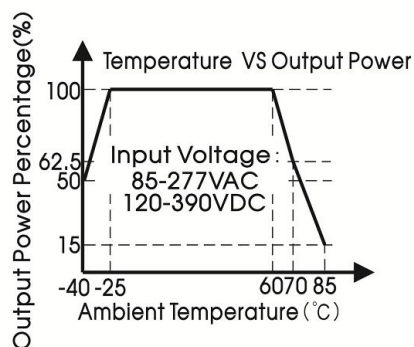

Output voltage VS Output current curve (Typ.)

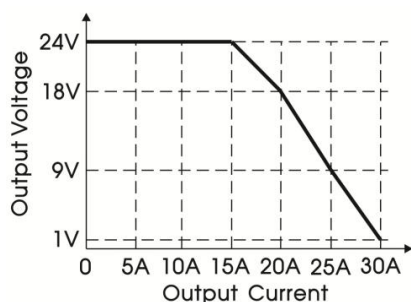

DC OK behavior curve (Typ.)

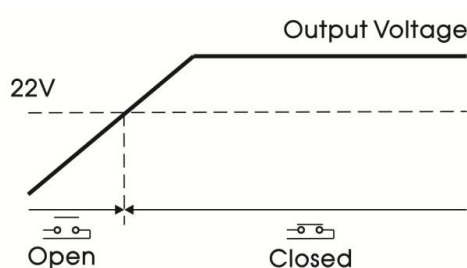

Over-current protection curve (Typ.)

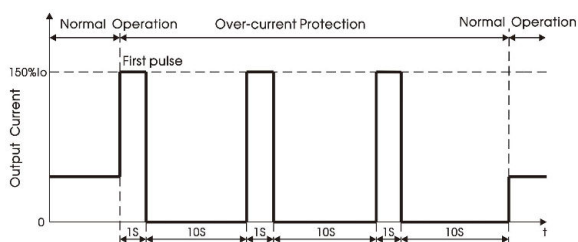


Figure 6

Short circuit protection curve (Typ.)







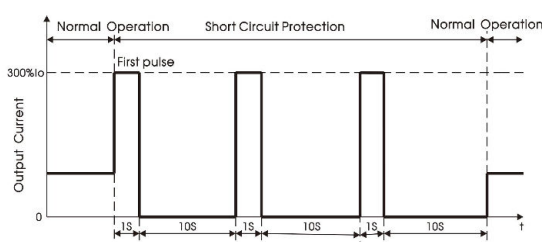


Figure 7

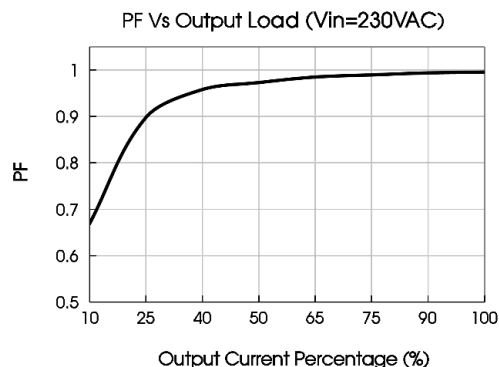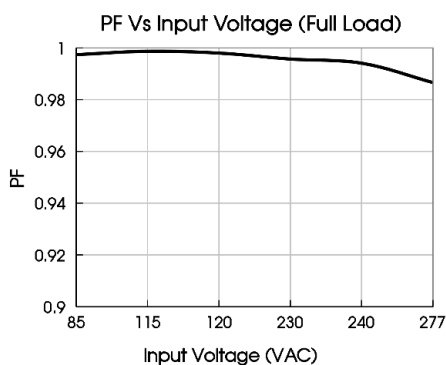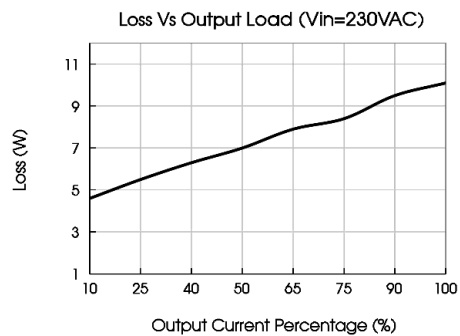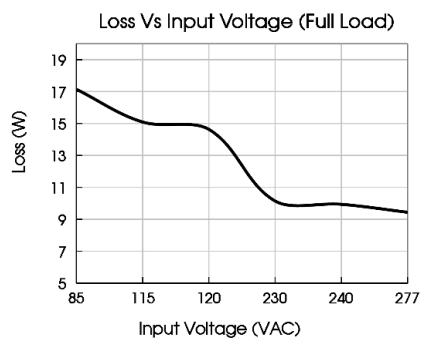
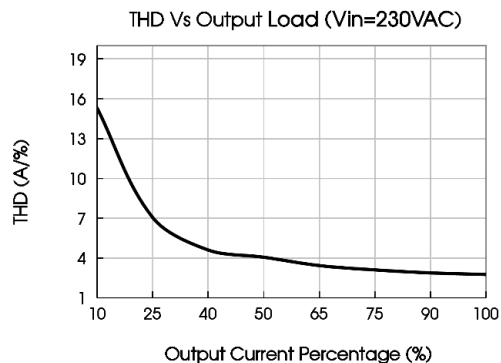


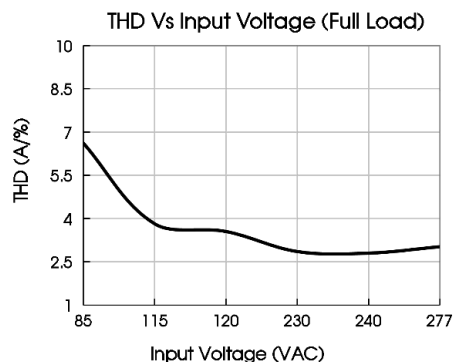



Note: 1.All curves are for 24V output, measured at input 230VAC, 50Hz, output  $I_o$ , ambient temperature 25°C, unless otherwise stated.

2.With an AC input voltage between 85-100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

3.This product is suitable for applications using natural air cooling.

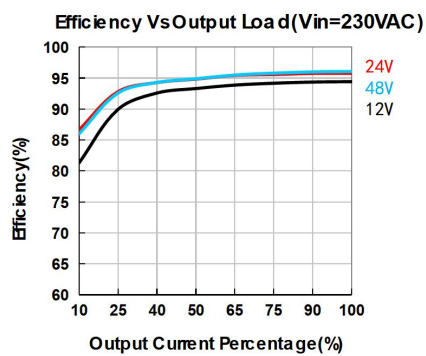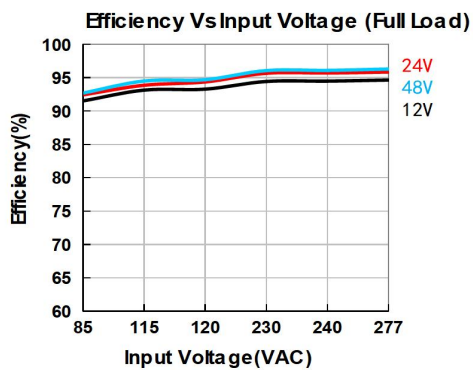


## Installation Diagram

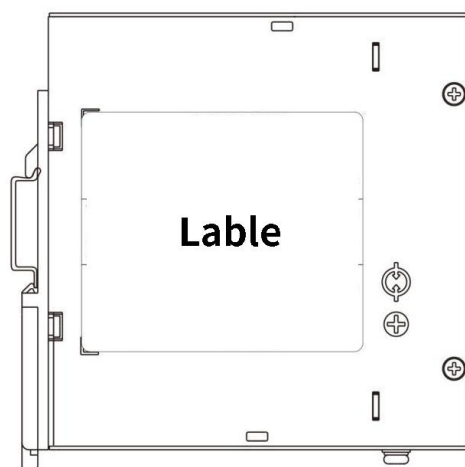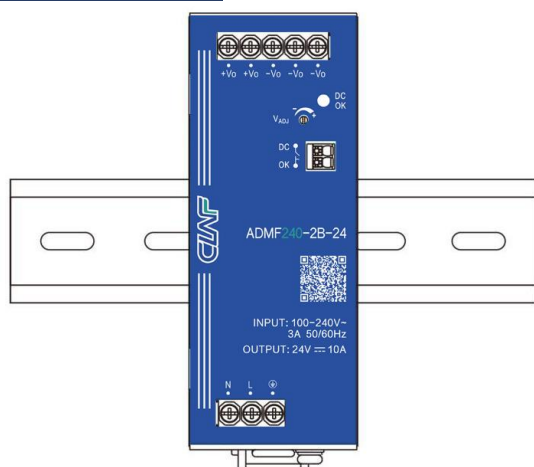


| Bill Of Material |                                                                                                                                         |       |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|
| 1                | Product                                                                                                                                 | 1 PCS |
| 2                | Phillips screwdriver<br>Slotted screwdriver                                                                                             | 1 PCS |
| 3                | TS35/7.5 or TS35/15                                                                                                                     | 1 PCS |
| 4                | 24-10AWG wire                                                                                                                           | / PCS |
|                  | The content is for reference only.<br>Regarding the actual wire diameter<br>and tightening torque, refer to the<br>dimensional drawing. |       |




Product



Phillips screwdriver  
Slotted screwdriver  
Diameter : 3mm




TS35/7.5 or TS35/15




24-10AWG wire

## Installation steps ①-②


① Clamp the buckle of the product into the TS35 DIN rail.

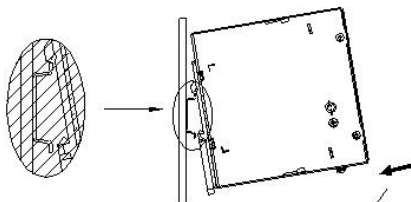


② Push the product vertically towards the TS35 DIN rail until hearing the sound of the buckle snapping into it.



## Disassembly steps ③-④

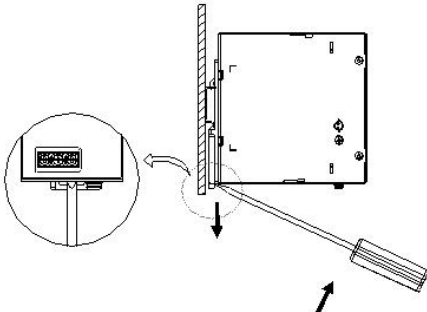


③ After inserting the slotted screwdriver into the square groove at the bottom of the buckle, push the slider of the buckle downward in the direction shown in the figure.

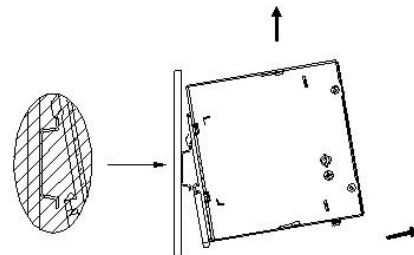


④ Hold the bottom of the product and push it outwards while pushing down the slider, then lift the product up to take the product out of the DIN rail.

## Wiring / Unwiring Steps ⑤-⑥

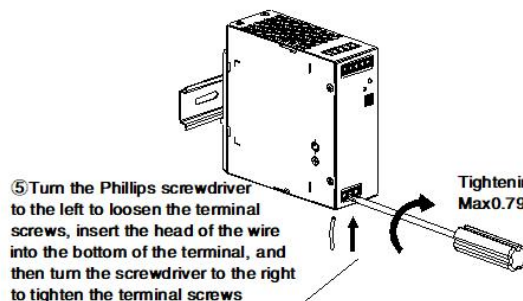


⑤ Turn the Phillips screwdriver to the left to loosen the terminal screws, insert the head of the wire into the bottom of the terminal, and then turn the screwdriver to the right to tighten the terminal screws



Tightening torque:  
Max0.79N · m(Reference);

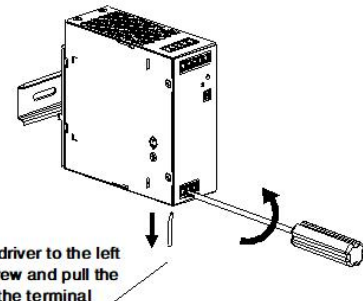



⑥ Turn the Phillips screwdriver to the left to loosen the terminal screw and pull the wire out of the bottom of the terminal

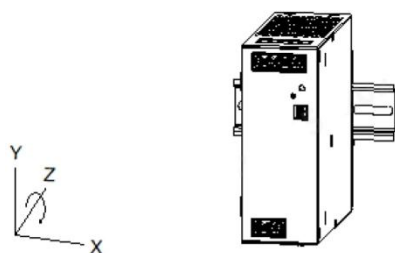



Rotate the installation position  
(0° Z-Axis)

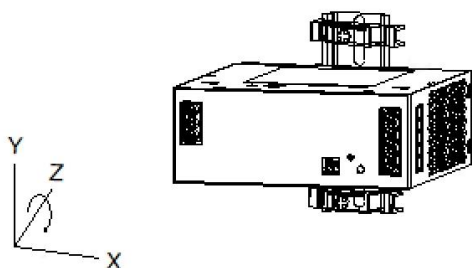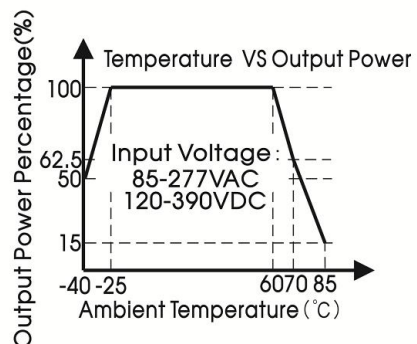


Rotate the installation position  
(90° Z-Axis)

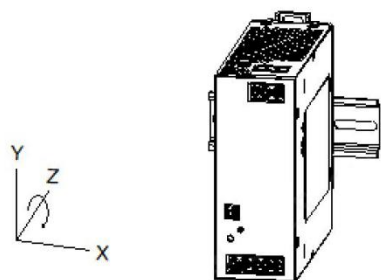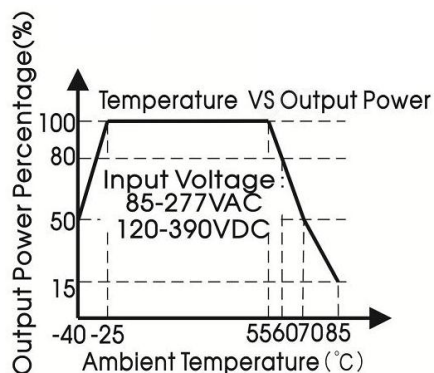


Rotate the installation position  
(180° Z-Axis)

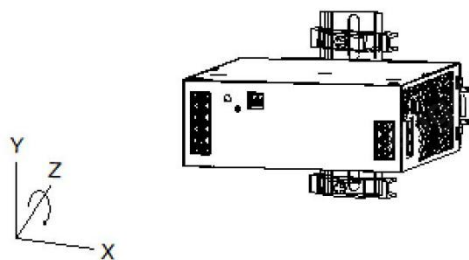
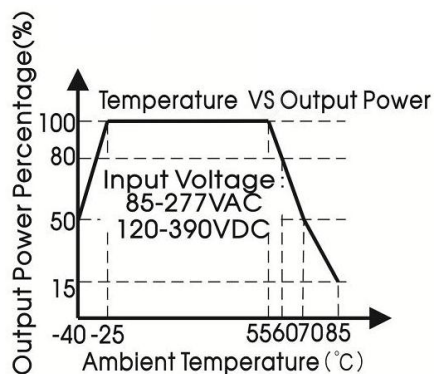


Rotate the installation position  
(270° Z-Axis)

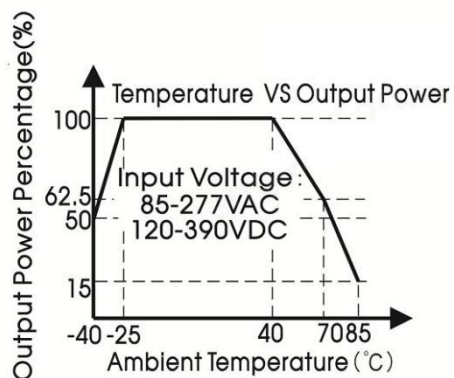


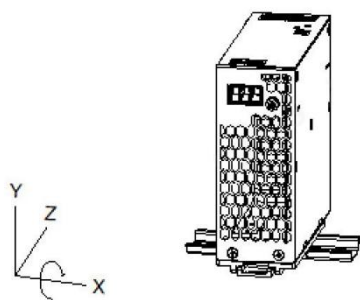


Rotate the installation position  
(270° X-Axis)

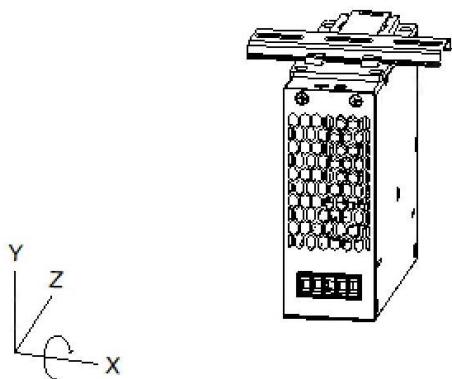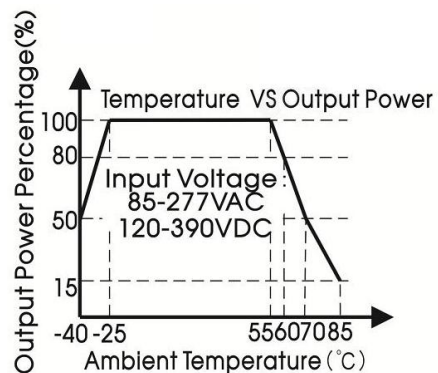


Rotate the installation position  
(90° X-Axis)

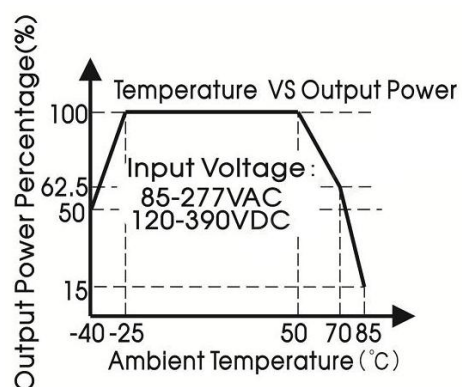

## Dimensions and Recommended

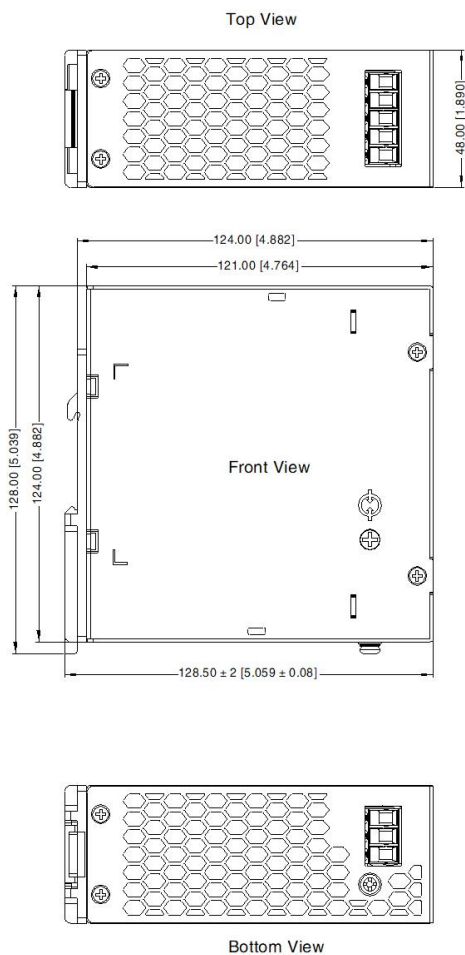

THIRD ANGLE PROJECTION 

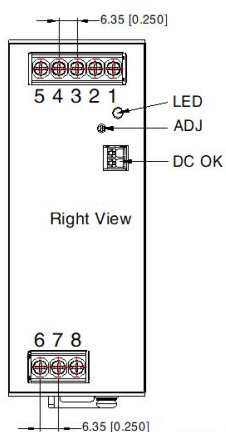

| Pin-Out |                                                                                     |
|---------|-------------------------------------------------------------------------------------|
| Pin     | Mark                                                                                |
| 1       | -Vo                                                                                 |
| 2       | -Vo                                                                                 |
| 3       | -Vo                                                                                 |
| 4       | +Vo                                                                                 |
| 5       | +Vo                                                                                 |
| 6       | AC(N)                                                                               |
| 7       | AC(L)                                                                               |
| 8       |  |

Note:

Unit: mm[inch]

LED: Output status indicator LED

ADJ: Output adjustable resistor

Wire range: Input: 26-10AWG(12-10AWG for pin8)

Output: 12V: 12-10AWG

24V: 16-10AWG

48V: 18-10AWG

DC OK: 24-16AWG

Tightening torque: Max 0.5N · m

Mounting rail: TS35, rail needs to connect safety ground

General tolerances: ± 1.00[± 0.039]



**WARNING** Risk of electrical shock, fire, personal injury or death:

**AVERTISSEMENT** AVERTISSEMENT Risque de choc électrique, d'incendie, de blessures corporelles ou de décès :

1. Do not use the power supply without proper grounding (Protective Earth). Use the terminal on the input block for earth connection and not one of the screws on the housing;  
N'utilisez pas l'alimentation électrique sans mise à la terre appropriée (Terre protectrice). Utilisez le terminal sur le bloc d'entrée pour la connexion terrestre et non pas une des vis sur le boîtier;
2. Turn power off before working on the device, protect against inadvertent re-powering;  
Éteignez l'alimentation avant de travailler sur l'appareil, protégez-vous contre la réénergisation accidentelle;
3. Make sure that the wiring is correct by following all local and national codes;  
Assurez-vous que le câblage est correct en suivant tous les codes locaux et nationaux;
4. Do not modify or repair the unit;  
Ne modifiez pas ou ne réparez pas l'appareil;
5. Do not open the unit as high voltages are present inside;  
Ne modifiez pas ou ne réparez pas l'appareil;
6. Use caution to prevent any foreign objects from entering the housing;  
Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;
7. Do not use in wet locations or in areas where moisture or condensation can be expected;  
Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;
8. Do not touch during power-on, and immediately after power-off, hot surfaces may cause burns;  
Ne touchez pas pendant l'alimentation et, immédiatement après l'alimentation, les surfaces chaudes peuvent causer des brûlures.
9. For ambient temperature  $\leq 60^{\circ}\text{C}$ , use  $\geq 90^{\circ}\text{C}$  - copper wire only; for ambient temperature  $> 60^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , use  $\geq 105^{\circ}\text{C}$  - copper wire only; use only wires with a minimum dielectric strength of 300V (input) and 60V (output);  
Température ambiante  $\leq 60^{\circ}\text{C}$ , utiliser  $\geq 90^{\circ}\text{C}$  - seulement fils de cuivre; Température ambiante  $> 60^{\circ}\text{C}$  et  $85^{\circ}\text{C}$ , utiliser  $\geq 105^{\circ}\text{C}$  - seulement fils de cuivre; Uniquement pour l'utilisation de fils de cuivre d'une résistance d'isolation minimale de 300V (d'entrée) et 60V (de sortie).



Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a = 25^{\circ}\text{C}$ , humidity  $< 75\% \text{RH}$  with nominal input voltage and rated output load;
2. The room temperature derating of  $5^{\circ}\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
3. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. The out case needs to be connected to PE (⏏) of system when the terminal equipment in operating;
7. The output voltage can be adjusted by the ADJ, clockwise to increase;
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.