

## Descriptions

1W isolated , DC-DC converter



RoHS



Report

EN62368-1



Report

BS EN62368-1

## Features

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 85%
- I/O isolation test voltage 3KVDC
- Industry standard pin-out

## Applications

- Industrial control
- Electric power
- Instrumentation

## Selection Guide

| Certification | Part No    | Input Voltage (VDC) | Output        |                           | Full Load Efficiency (%)<br>Min./Typ. | Capacitive Load(μF)<br>Max. |
|---------------|------------|---------------------|---------------|---------------------------|---------------------------------------|-----------------------------|
|               |            | Nominal (Range)     | Voltage (VDC) | Current (mA)<br>Max./Min. |                                       |                             |
| --            | DFN1-F0303 | 3.3<br>(2.97-3.63)  | 3.3           | 303/30                    | 75/79                                 | 2400                        |
| --            | DFN1-F0305 |                     | 5             | 200/20                    | 78/82                                 | 2400                        |
| EN/BS EN      | DFN1-F0503 | 5<br>(4.5-5.5)      | 3.3           | 303/30                    | 70/74                                 | 2400                        |
| UL/EN/BS EN   | DFN1-F0505 |                     | 5             | 200/20                    | 78/82                                 | 2400                        |
| --            | DFN1-F0507 |                     | 7.2           | 139/13                    | 76/80                                 | 1000                        |
| EN/BS EN      | DFN1-F0509 |                     | 9             | 111/12                    | 79/83                                 | 1000                        |
| EN/BS EN      | DFN1-F0512 |                     | 12            | 84/9                      | 79/83                                 | 560                         |
| EN/BS EN      | DFN1-F0515 |                     | 15            | 67/7                      | 79/83                                 | 560                         |
| EN/BS EN      | DFN1-F0524 |                     | 24            | 42/4                      | 81/85                                 | 220                         |
| EN/BS EN      | DFN1-F1203 | 12<br>(10.8-13.2)   | 3.3           | 303/30                    | 71/75                                 | 2400                        |
| EN/BS EN      | DFN1-F1205 |                     | 5             | 200/20                    | 76/80                                 | 2400                        |
| EN/BS EN      | DFN1-F1209 |                     | 9             | 111/12                    | 74/78                                 | 1200                        |
| EN/BS EN      | DFN1-F1212 |                     | 12            | 83/9                      | 76/80                                 | 560                         |
| EN/BS EN      | DFN1-F1215 |                     | 15            | 67/7                      | 77/81                                 | 560                         |
| EN/BS EN      | DFN1-F1224 |                     | 24            | 42/5                      | 77/81                                 | 220                         |
| --            | DFN1-F1505 | 15<br>(13.5-16.5)   | 5             | 200/20                    | 76/80                                 | 2400                        |
| --            | DFN1-F1509 |                     | 9             | 111/12                    | 76/80                                 | 1200                        |

|          |            |                   |     |        |       |      |
|----------|------------|-------------------|-----|--------|-------|------|
| --       | DFN1-F1515 | 24<br>(21.6-26.4) | 15  | 67/7   | 77/81 | 560  |
| EN/BS EN | DFN1-F2403 |                   | 3.3 | 303/30 | 69/75 | 2400 |
| EN/BS EN | DFN1-F2405 |                   | 5   | 200/20 | 73/79 | 2400 |
| EN/BS EN | DFN1-F2409 |                   | 9   | 111/12 | 74/80 | 1200 |
| EN/BS EN | DFN1-F2412 |                   | 12  | 83/9   | 75/81 | 560  |
| EN/BS EN | DFN1-F2415 |                   | 15  | 67/7   | 75/81 | 560  |
| EN/BS EN | DFN1-F2424 |                   | 24  | 42/5   | 75/81 | 220  |

## Specifications

| Product Specifications | Item                                   | Operating Conditions      |                          | Min.               | Typ.                                 | Max.   | Unit |    |
|------------------------|----------------------------------------|---------------------------|--------------------------|--------------------|--------------------------------------|--------|------|----|
| Input Specifications   | Input Current<br>(full load / no-load) | 3.3VDC input              | 3.3VDC output            | --                 | 384/12                               | 405/-- | mA   |    |
|                        |                                        |                           | 5VDC output              | --                 | 370/12                               | 389/-- |      |    |
|                        |                                        | 5VDC input                | 3.3VDC/5VDC output       | --                 | 270/8                                | 286/-- |      |    |
|                        |                                        |                           | Other output             | --                 | 241/8                                | 254/-- |      |    |
|                        |                                        | 12V input                 | 3.3VDC output            | --                 | 112/8                                | 118/-- |      |    |
|                        |                                        |                           | 5VDC/9VDC/12VDC output   | --                 | 105/8                                | 110/-- |      |    |
|                        |                                        |                           | 15VDC/24VDC output       | --                 | 103/8                                | 109/-- |      |    |
|                        |                                        | 15V input                 | 5VDC/9VDC output         | --                 | 83/8                                 | 88/--  |      |    |
|                        |                                        |                           | 15VDC output             | --                 | 82/8                                 | 87/--  |      |    |
|                        |                                        | 24V input                 | 3.3VDC output            | --                 | 56/8                                 | 61/--  |      |    |
|                        |                                        |                           | 5VDC output              | --                 | 53/8                                 | 58/--  |      |    |
|                        |                                        |                           | 9VDC output              | --                 | 52/8                                 | 57/--  |      |    |
|                        |                                        |                           | 12VDC/15VDC/24VDC output | --                 | 52/8                                 | 56/--  |      |    |
|                        | Reflected Ripple Current               | Other input               |                          | --                 | 15                                   | --     |      |    |
|                        |                                        | 3.3VDC input              |                          | --                 | 30                                   | --     |      |    |
|                        | Surge Voltage<br>(1sec. max.)          | 3.3VDC input              |                          | -0.7               | --                                   | 5      | VDC  |    |
|                        |                                        | 5VDC input                |                          | -0.7               | --                                   | 9      |      |    |
|                        |                                        | 12VDC input               |                          | -0.7               | --                                   | 18     |      |    |
|                        |                                        | 15VDC input               |                          | -0.7               | --                                   | 21     |      |    |
|                        |                                        | 24VDC input               |                          | -0.7               | --                                   | 30     |      |    |
|                        | Input Filter                           |                           |                          |                    | Capacitance filter                   |        |      |    |
|                        | Hot Plug                               |                           |                          |                    | Unavailable                          |        |      |    |
| Output Specifications  | Voltage Accuracy                       |                           |                          |                    | See output regulation curve (Fig. 1) |        |      |    |
|                        | Linear Regulation                      | Input voltage change: ±1% |                          | 3.3VDC output      | --                                   | --     | ±1.5 | -- |
|                        |                                        |                           |                          | Others             | --                                   | --     | ±1.2 |    |
|                        | Load Regulation                        | 10%-100 % load            | 3.3VDC input             | 3.3VDC output      | --                                   | 13     | 20   | %  |
|                        |                                        |                           |                          | 5VDC output        | --                                   | 11     | 15   |    |
|                        |                                        |                           | 5VDC input               | 3.3VDC output      | --                                   | 15     | 20   |    |
|                        |                                        |                           |                          | 5VDC/7.2VDC output | --                                   | 10     | 15   |    |
|                        |                                        |                           | 5VDC input               | 9VDC output        | --                                   | 8      | 10   |    |
|                        |                                        |                           |                          | 12VDC output       | --                                   | 7      | 10   |    |
|                        |                                        |                           |                          | 15VDC output       | --                                   | 6      | 10   |    |
|                        |                                        |                           |                          | 24VDC output       | --                                   | 5      | 10   |    |

|                                                                       |                                         |                      |                                                                                        |                             |      |                                        |     |         |       |
|-----------------------------------------------------------------------|-----------------------------------------|----------------------|----------------------------------------------------------------------------------------|-----------------------------|------|----------------------------------------|-----|---------|-------|
|                                                                       |                                         |                      | Other<br>input                                                                         | 3.3VDC output               |      | --                                     | 8   | 20      |       |
|                                                                       |                                         |                      |                                                                                        | 5VDC output                 |      | --                                     | 5   | 15      |       |
|                                                                       |                                         |                      |                                                                                        | 9VDC/12VDC/15V<br>DC output |      | --                                     | 3   | 10      |       |
|                                                                       |                                         |                      |                                                                                        | 24VDC output                |      | --                                     | 2   | 10      |       |
|                                                                       | Ripple & Noise <sup>①</sup>             | 20MHz bandwidth      | Other<br>input                                                                         | 3.3VDC input                |      | --                                     | 50  | 100     | mVp-p |
|                                                                       |                                         |                      |                                                                                        | 24VDC<br>output             |      | --                                     | 50  | 100     |       |
|                                                                       |                                         |                      |                                                                                        | Other<br>output             |      | --                                     | 30  | 75      |       |
|                                                                       | Temperature Coefficient                 |                      | Full load                                                                              |                             |      |                                        | --  | ±0.02   | --    |
| Short-circuit Protection                                              |                                         |                      |                                                                                        |                             |      | Continuous, self-recovery              |     |         |       |
| General<br>Specifications                                             | Isolation                               |                      | Input-output electric strength test for 1<br>minute with a leakage current of 1mA max. |                             |      | 3000                                   | --  | --      | VDC   |
|                                                                       | Insulation Resistance                   |                      | Input-output resistance at 500VDC                                                      |                             |      | 1000                                   | --  | --      | MΩ    |
|                                                                       | Isolation Capacitance                   |                      | Input-output capacitance at 100kHz/0.1V                                                |                             |      | --                                     | 20  | --      | pF    |
|                                                                       | Operating Temperature                   |                      | Derating when operating temperature≥<br>85°C ( see Fig. 2)                             |                             |      | -40                                    | --  | 105     | °C    |
|                                                                       | Storage Temperature                     |                      |                                                                                        |                             |      | -55                                    | --  | 125     | °C    |
|                                                                       | Case Temperature Rise                   |                      | Ta=25°C                                                                                |                             |      | --                                     | 25  | --      |       |
|                                                                       | Pin Soldering Resistance<br>Temperature |                      | Soldering spot is 1.5mm away from case<br>for 10 seconds                               |                             |      | --                                     | --  | 300     |       |
|                                                                       | Storage Humidity                        |                      | Non-condensing                                                                         |                             |      | 5                                      | --  | 95      | %RH   |
|                                                                       | Vibration                               |                      |                                                                                        |                             |      | 10-150Hz, 5G, 0.75mm. along X, Y and Z |     |         |       |
|                                                                       | Switching Frequency                     |                      | Full load, 3.3VDC input                                                                |                             |      | --                                     | 220 | --      | kHz   |
|                                                                       |                                         |                      | Full load, 5VDC input                                                                  |                             |      | --                                     | 270 | --      |       |
|                                                                       |                                         |                      | Full load, other input                                                                 |                             |      | --                                     | 260 | --      |       |
| MTBF                                                                  |                                         | MIL-HDBK-217F @ 25°C |                                                                                        |                             | 3500 | --                                     | --  | k hours |       |
| Mechanical<br>Specifications                                          | Case Material                           |                      | Black plastic, flame-retardant and heat-resistant (UL94V-0)                            |                             |      |                                        |     |         |       |
|                                                                       | Dimension                               |                      | 12.70 x 10.16 x 8.20 mm                                                                |                             |      |                                        |     |         |       |
|                                                                       | Weight                                  |                      | 1.8g (Typ.)                                                                            |                             |      |                                        |     |         |       |
|                                                                       | Cooling Method                          |                      | Free air convection                                                                    |                             |      |                                        |     |         |       |
| Note: ①The “parallel cable” method is used for Ripple and Noise test. |                                         |                      |                                                                                        |                             |      |                                        |     |         |       |

### Electromagnetic Compatibility (EMC)

|                                                     |                |                   |                         |                        |  |                  |
|-----------------------------------------------------|----------------|-------------------|-------------------------|------------------------|--|------------------|
| Electromagnetic<br>Compatibility<br>(EMC)           | Emissions(EMI) | CE                | CISPR32/EN55032 CLASS B |                        |  |                  |
|                                                     |                | RE                | CISPR32/EN55032 CLASS B |                        |  |                  |
|                                                     | Immunity(EMS)  | ESD (5VDC input)  | IEC/EN61000-4-2         | Air ±8kV, Contact ±4kV |  | perf. Criteria B |
|                                                     |                | ESD (Other input) | IEC/EN61000-4-2         | Air ±8kV, Contact ±6kV |  | perf. Criteria B |
| Note: Refer to Fig. 4 for recommended circuit test. |                |                   |                         |                        |  |                  |

## Characteristic Curve

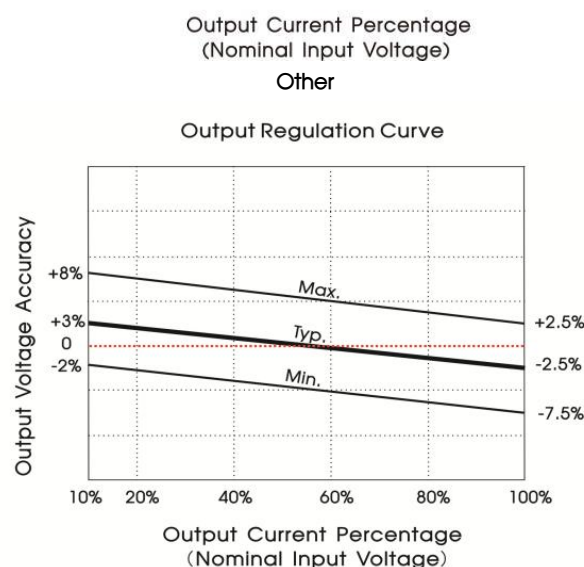
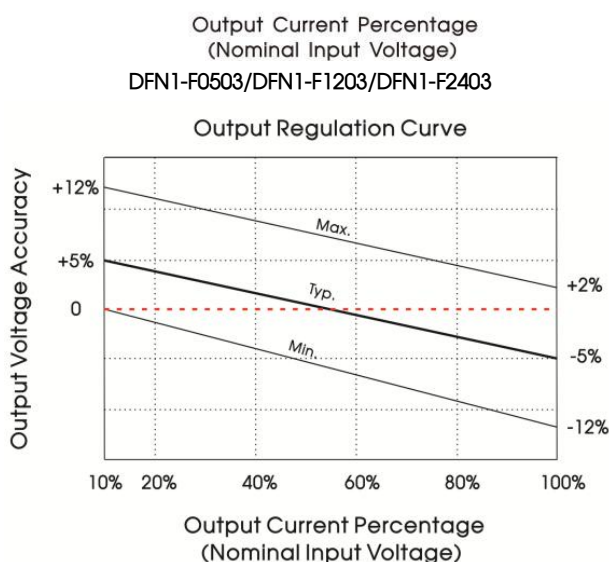
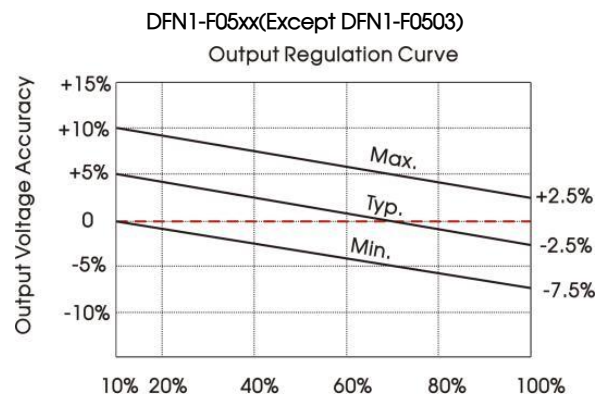
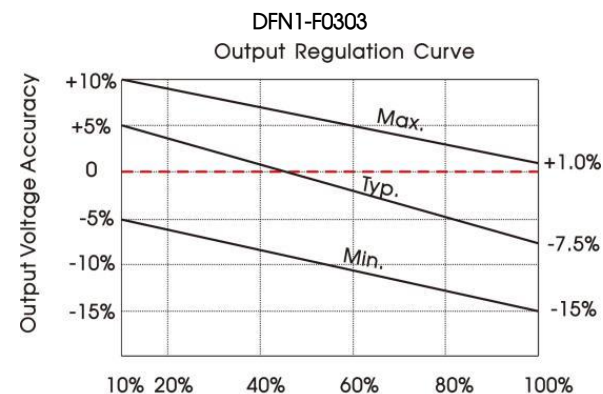


Fig. 1


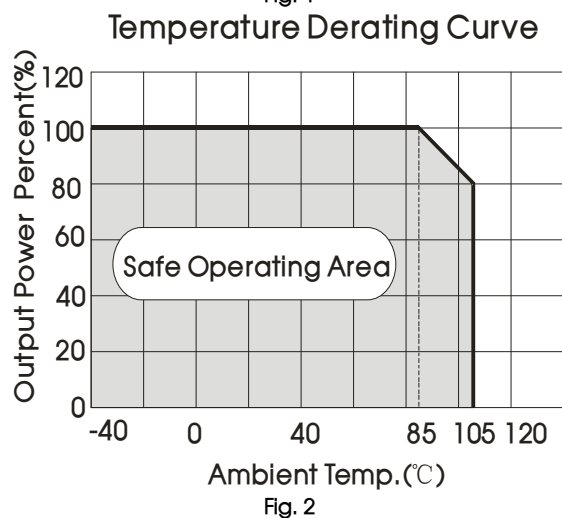



Fig. 2

Efficiency Vs Input Voltage (Full Load)

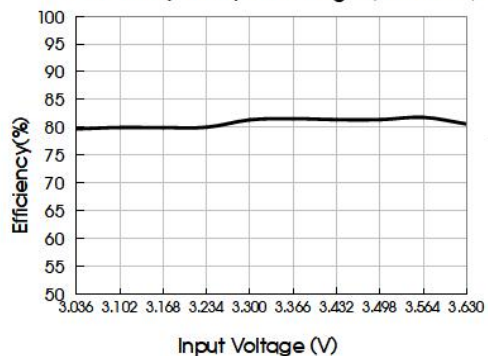


DFN1-F0305

Efficiency Vs Output Load (Vin=3.3V)

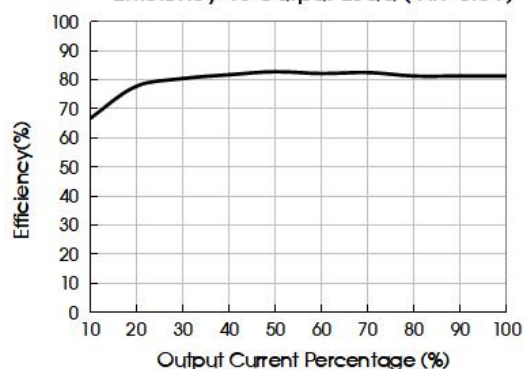


DFN1-F0305

Efficiency Vs Input Voltage (Full Load)

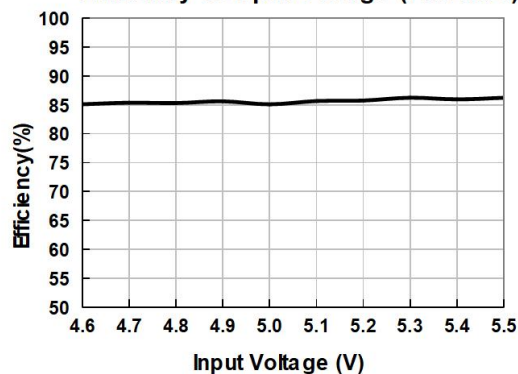


DFN1-F0505

Efficiency Vs Output Load (Vin=5V)

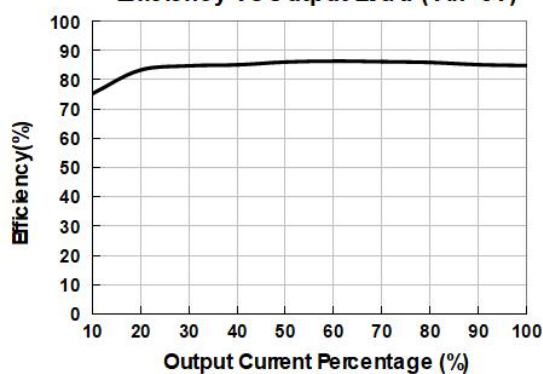


DFN1-F0505

Efficiency Vs Input Voltage (Full Load)


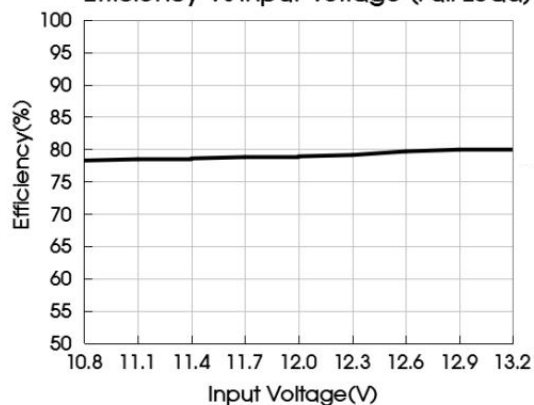


DFN1-F1205

Efficiency Vs Output Load (Vin=12V)

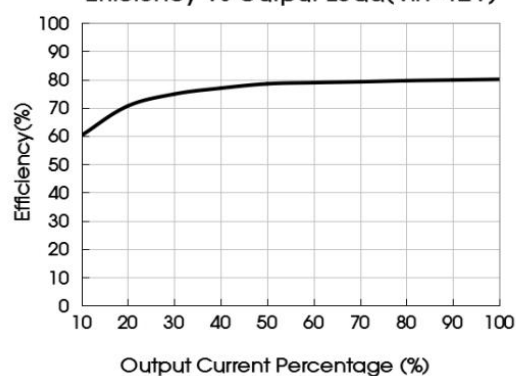

DFN1-F1205

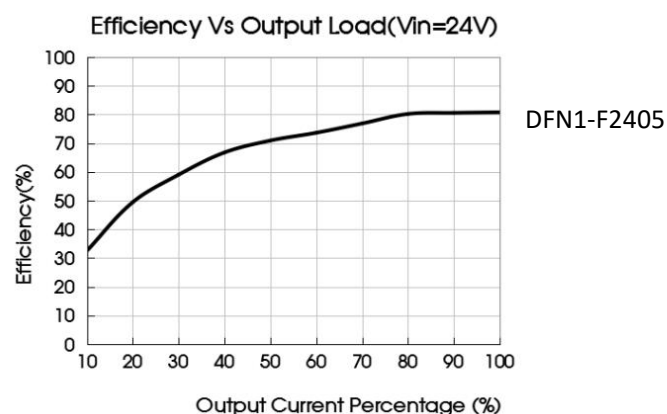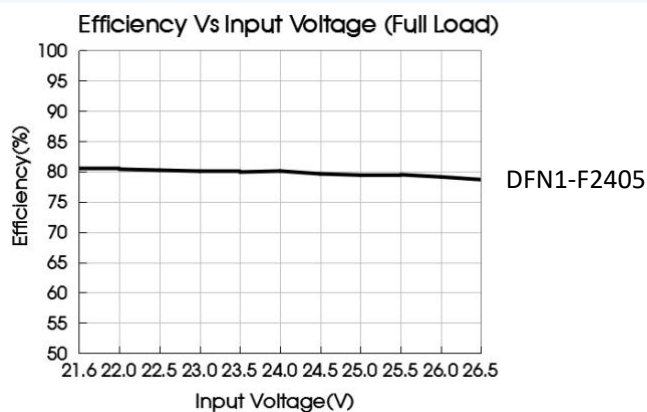

## Design Reference

### 1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

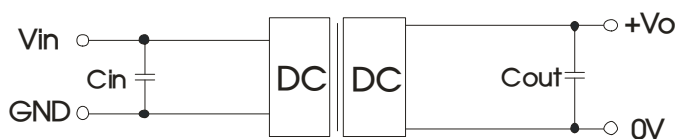


Fig. 3: Typical circuit diagram

Table 1: Recommended input and output capacitor values

| Vin    | Cin       | Vo           | Cout      |
|--------|-----------|--------------|-----------|
| 3.3VDC | 10μF/6V   | 3.3/5/7.2VDC | 10μF/6V   |
| 5VDC   | 4.7μF/16V | 9VDC         | 4.7μF/25V |
| 12VDC  | 2.2μF/25V | 12VDC        | 2.2μF/25V |
| 15VDC  | 2.2μF/25V | 15/24VDC     | 1μF/50V   |
| 24VDC  | 1μF/50V   | --           | --        |

### 2. EMC compliance recommended circuit


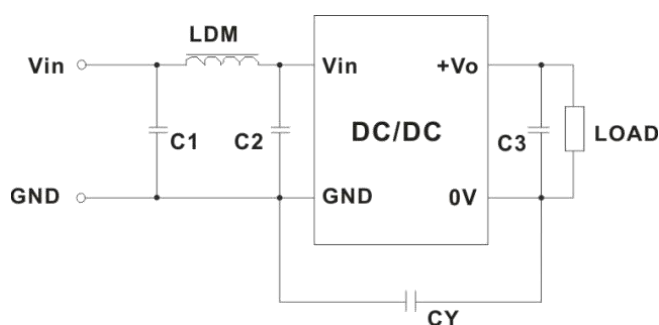



Table 2: Recommended EMC filter values

| Input voltage  | 5VDC           |                              | Others       |
|----------------|----------------|------------------------------|--------------|
| Output voltage | 3.3/5/7.2/9VDC | 12/15/24VDC                  | --           |
| Emissions      | C1/C2          | 4.7μF /25V                   | 4.7μF /50V   |
|                | CY             | 100pF/4kVDC                  | 270pF /4kVDC |
|                | C3             | Refer to the Cout in table 1 |              |
|                | LDM            | 6.8μH                        |              |

## Dimensions and Recommended Layout

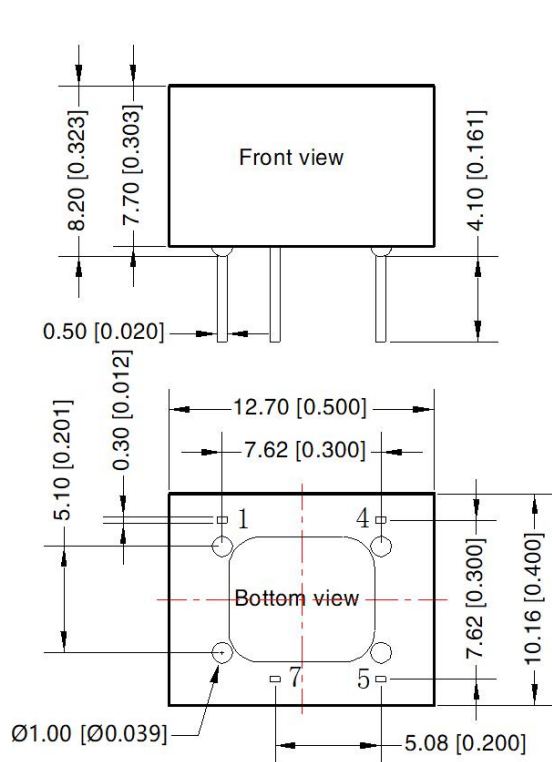

Note:  
Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.25 [\pm 0.010]$

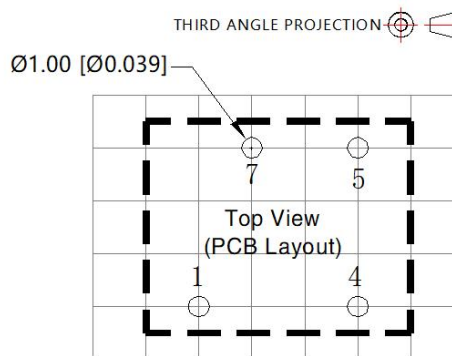

Note: Grid 2.54\*2.54mm

| Pin-Out |      |
|---------|------|
| Pin     | Mark |
| 1       | GND  |
| 4       | Vin  |
| 5       | +Vo  |
| 7       | 0V   |

## Notes:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.