

Descriptions

30W isolated, DC/DC Converter



RoHS



UL **us**
UL 62368-1

CE Report
EN 62368-1

UK **CA** Report
BS EN 62368-1

Features

- Ultra-wide 4:1 input voltage range
- High efficiency up to 90% with full load
- High efficiency up to 82% with 5% load
- No-load power consumption as low as 0.14W
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-voltage, over-current protection
- Operating ambient temperature range: -40°C to +80°C
- Meets CISPR32/EN55032 CLASS A without extra components
- Six-sided metal shielded package
- Input reverse polarity protection available with chassis(E2S) or Din-Rail mounting (D4S) version

Applications

- Data transmission device
- Battery power supply device
- Telecommunication device
- Distributed power supply system
- Hybrid module system
- Remote control system
- Industrial robot
- Railway

Selection Guide

Certification	Part No. ①	Input Voltage (VDC)		Output		Full Load Efficiency ^④ (%) Min./Typ.	Capacitive Load ^⑤ (μF)Max.
		Nominal ^② (Range)	Max. ^③	Voltage (VDC)	Current (mA) Max./Min.		
EN/BS EN	DWLD30-B2403	24 (9-36)	40	3.3	6000/0	83/85	10000
UL/EN/BS EN	DWLD30-B2405			5	6000/0	84/86	10000
EN/BS EN	DWLD30-B2409			9	3333/0	86/88	4700
UL/EN/BS EN	DWLD30-B2412			12	2500/0	88/90	2700
EN/BS EN	DWLD30-B2415			15	2000/0	88/90	1680
EN/BS EN	DWLD30-B2424			24	1250/0	88/90	680
EN/BS EN	DWLD30-A2405			±5	±3000/0	84/86	2000
EN/BS EN	DWLD30-A2412			±12	±1250/0	87/89	1250
EN/BS EN	DWLD30-A2415			±15	±1000/0	87/89	680
EN/BS EN	DWLD30-A2424			±24	±625/0	87/89	470
EN/BS EN	DWLD30-B4803	48 (18-75)	80	3.3	6000/0	84/86	10000
EN/BS EN	DWLD30-B4805			5	6000/0	85/87	10000
UL/EN/BS EN	DWLD30-B4812			12	2500/0	86/88	2700
EN/BS EN	DWLD30-B4815			15	2000/0	87/89	1680
EN/BS EN	DWLD30-B4824			24	1250/0	85/87	680

Notes:

①Use "H" suffix for heat sink mounting, "E2S" suffix for chassis mounting and "D4S" suffix for DIN-Rail mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;

②The minimum input voltage and starting voltage of E2S and D4S Model are 1VDC higher than those of DIP package due to input reverse polarity protection function;

③Exceeding the maximum input voltage may cause permanent damage;

④Efficiency is measured at nominal input voltage and rated output load; efficiencies for E2S and D4S Model's is decreased by 2% due to the input reverse polarity protection circuit;

⑤The specified maximum capacitive load for positive and negative output is identical.

Specifications

Product Specifications	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage	3.3V output	--	971/60	994/100	mA
			5V output	--	1453/60	1488/100	
			Others	--	1420/6	1488/16	
		48VDC nominal input series, nominal input voltage	3.3V output	--	480/20	491/30	
			5V output	--	718/20	735/35	
			Others	--	710/5	744/10	
	Reflected Ripple Current	Nominal input voltage		--	40	--	
	Surge Voltage (1sec. max.)	24VDC nominal input series		-0.7	--	50	VDC
		48VDC nominal input series		-0.7	--	100	

Input Specifications	Start-up Voltage	24VDC nominal input series		--	--	9	
		48VDC nominal input series		--	--	18	
	Input Under-voltage Protection	24VDC nominal input series		5.5	6.5	--	
		48VDC nominal input series		12.0	15.5	--	
	Start-up Time	Nominal input voltage & constant resistance load		--	10	--	ms
	Input Filter	Pi filter					
	Hot Plug	Unavailable					
	Ctrl ^①	Module on		Ctrl pin open or pulled high (3.5-12VDC)			
		Module off		Ctrl pin pulled low to GND (0-1.2VDC)			
		Input current when off		--	5	8	mA
Output Specifications	Voltage Accuracy	5%-100% load		--	±1	±3	%
		0%-5% load		--	±1	±5	
	Linear Regulation	Input voltage variation from low to high at full load	Vo1	--	±0.2	±0.5	
			Vo2	--	±0.5	±1	
	Load Regulation ^②	5%-100% load	Vo1	--	±0.5	±1	
			Vo2	--	±0.5	±1.5	
	Cross Regulation	Dual output, Vo1 load at 50%, Vo2 load at range of 10%-100%		--	--	±5	μs
	Transient Recovery Time	25% load step change, nominal input voltage		--	300	500	
	Transient Response Deviation	25% load step change, nominal input voltage	3.3V/5V/±5V output	--	±5	±8	%
			Others	--	±3	±5	
	Temperature Coefficient	Full load		--	--	±0.03	%/°C
	Ripple & Noise ^③	20MHz bandwidth, nominal input voltage, 100% load	Singe output	--	50	100	mVp-p
			Dual output	--	50	150	
	Trim	Input voltage range		90	--	110	%Vo
	Over-voltage Protection			110	--	160	
	Over-current Protection			110	--	190	%Io
	Short-circuit Protection			Hiccup, continuous, self-recovery			
General Specifications	Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.		1500	--	--	VDC
	Insulation Resistance	Input-output resistance at 500VDC/60sec		1000	--	--	MΩ
	Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		--	2000	--	pF

	Operating Temperature	See Fig. 1, Fig. 2, Fig. 3 and Fig. 4	-40	--	+80	℃
	Storage Temperature	General Specifications	-55	--	+125	
	Storage Humidity	Non-condensing	5	--	95	%RH
	Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	℃
	Vibration		IEC/EN61373 - Category 1, Grade B			
	Switching Frequency④	PWM mode	--	300	--	kHz
	MTBF	MIL-HDBK-217F@25℃	1000	--	--	k hours
	Mechanical Specifications	Case Material	Aluminum alloy			
Dimensions		Horizontal package (without heat sink)			50.80 × 25.40 × 11.80 mm	
		Horizontal package (with heat sink)			51.40 × 26.20 × 16.50 mm	
		E2S chassis mounting (without heat sink)			76.00 × 31.50 × 21.20 mm	
		E2S chassis mounting (with heat sink)			76.00 × 31.50 × 25.30 mm	
		D4S Din-rail mounting (without heat sink)			76.00 × 31.50 × 25.80 mm	
		D4S Din-rail mounting (with heat sink)			76.00 × 31.50 × 29.90 mm	
Weight		Without heat sink	Horizontal package/E2S chassis mounting/D4S Din-rail mounting		27.8g/52.0g/72.0g(Typ.)	
		With heat sink	Horizontal package/E2S chassis mounting/D4S Din-rail mounting		37.0g/60.0g/80.0g(Typ.)	
Cooling Method	Free air convection					
Note:						
①The Ctrl pin voltage is referenced to input GND.						
②Load regulation for 0%-100% load is ±5%;						
③The “parallel cable” method is used for ripple and noise test;						
④Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.						

Electromagnetic Compatibility (EMC)

Emissions	CE	Single output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.6-② for recommended circuit)		
		Dual output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.7-② for recommended circuit)		
	RE	Single output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.6-② for recommended circuit)		
		Dual output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.7-② for recommended circuit)		
Immunity	ESD		IEC/EN61000-4-2	Contact ±4kV	perf. Criteria B	
	RS		IEC/EN61000-4-3	10V/m	perf. Criteria A	
	EFT	Single output	IEC/EN61000-4-4	±2kV (see Fig.6-① for recommended circuit)	perf. Criteria B	
		Dual output	IEC/EN61000-4-4	±2kV (see Fig.7-① for recommended circuit)	perf. Criteria B	
	Surge	Single output	IEC/EN61000-4-5	line to line ±2kV (see Fig.6-① for recommended circuit)	perf. Criteria B	

		Dual output	IEC/EN61000-4-5 line to line $\pm 2\text{kV}$ (see Fig.7-① for recommended circuit)	perf. Criteria B
	CS	Single output	IEC/EN61000-4-6 3 Vr.m.s	perf. Criteria A
		Dual output	IEC/EN61000-4-6 10Vr.m.s	perf. Criteria A

Electromagnetic Compatibility (EMC) (EN50155)

Emissions	CE	Single output	EN50121-3-2	150kHz-500kHz	99dBμV (see Fig.6-② for recommended circuit)				
			EN55016-2-1	500kHz-30MHz	93dBμV (see Fig.6-② for recommended circuit)				
		Dual output	EN50121-3-2	150kHz-500kHz	99dBμV (see Fig.7-② for recommended circuit)				
			EN55016-2-1	500kHz-30MHz	93dBμV (see Fig.7-② for recommended circuit)				
	RE	Single output	EN50121-3-2	30MHz-230MHz	40dBμV/m at 10m (see Fig.6-② for recommended circuit)				
			EN55016-2-1	230MHz-1GHz	47dBμV/m at 10m (see Fig.6-② for recommended circuit)				
Dual output		EN50121-3-2	30MHz-230MHz	40dBμV/m at 10m (see Fig.7-② for recommended circuit)					
		EN55016-2-1	230MHz-1GHz	47dBμV/m at 10m (see Fig.7-② for recommended circuit)					
Immunity	ESD		EN50121-3-2	Contact	±6kV/Air ±8kV				perf. Criteria A
	RS		EN50121-3-2	20V/m				perf. Criteria A	
	EFT	Single output	EN50121-3-2	± 2kV	5/50ns	5kHz	(see Fig.6-① for recommended circuit)		perf. Criteria A
		Dual output	EN50121-3-2	± 2kV	5/50ns	5kHz	(see Fig.7-① for recommended circuit)		perf. Criteria A
	Surge	Single output	EN50121-3-2	line to line ±1kV (42Ω, 0.5μF) (see Fig.6-① for recommended circuit)				perf. Criteria A	
		Dual output	EN50121-3-2	line to line ±1kV (42Ω, 0.5μF) (see Fig.7-① for recommended circuit)				perf. Criteria A	
	CS	Single output	EN50121-3-2	0.15MHz-80MHz	10V r.m.s				perf. Criteria A
		Dual output	EN50121-3-2	0.15MHz-80MHz	10V r.m.s				perf. Criteria A

Characteristic Curve

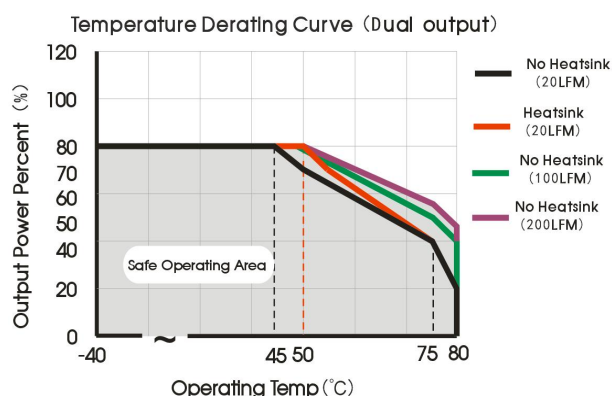


Fig. 1

Applicable models: DWLD30-A2405 (9-18V input voltage),
DWLD30-A2424 (9-18V input voltage),

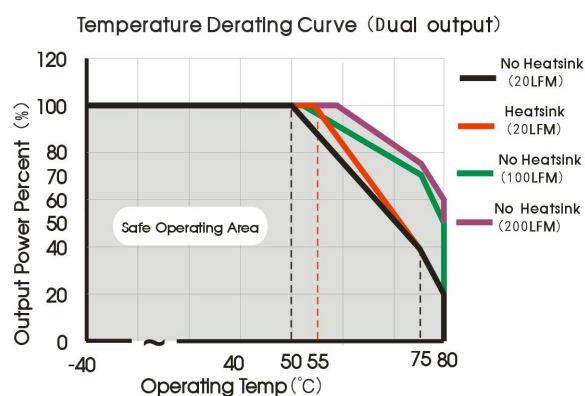


Fig. 2

Applicable models: DWLD30-A2405 (18-36V input voltage),
DWLD30-A2424 (18-36V input voltage),
DWLD30-A2412, DWLD30-A2415

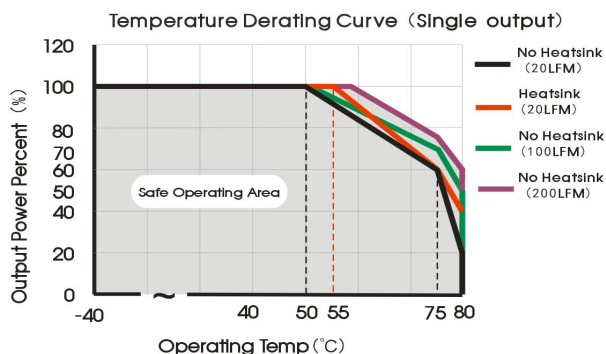


Fig. 3

Applicable models: DWLD30-B2403、DWLD30-B2405、
DWLD30-B4803、DWLD30-B4805



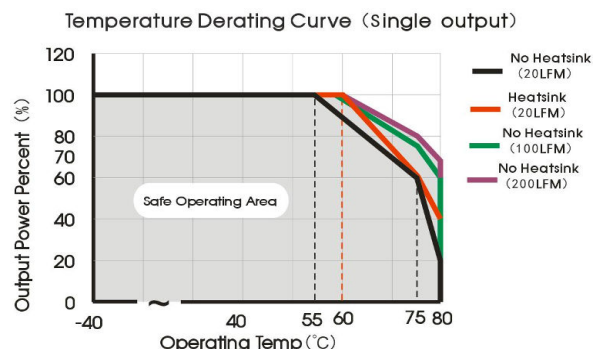


Fig. 4

Applicable models: DWLD30-B2409、DWLD30-B2412、
DWLD30-B2415、DWLD30-B2424、
DWLD30-B4812、DWLD30-B4815、
DWLD30-B4824

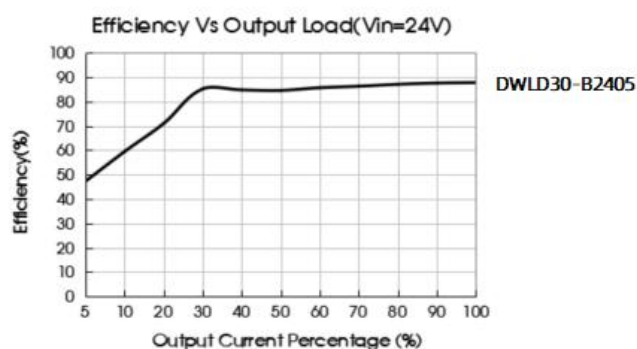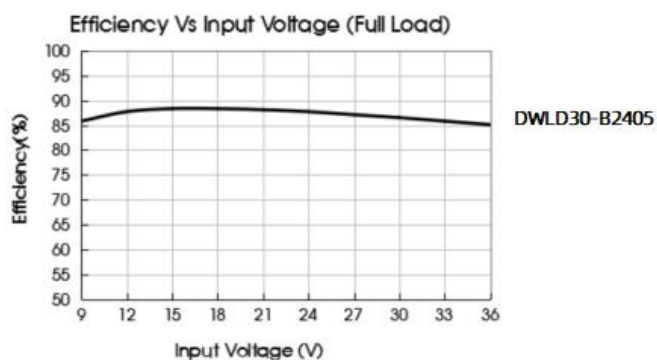

Design Reference

1. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 5.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

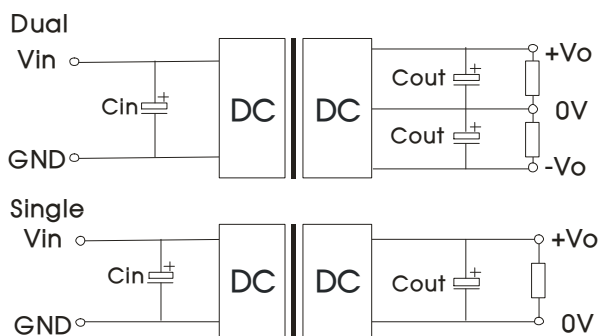


Fig. 5

Single output voltage (VDC)	C_{out} (μF)	C_{in} (μF)	Dual output voltage (VDC)	C_{out} (μF)	C_{in} (μF)
3.3/5/9	220	100	$\pm 5/\pm 12/\pm 15$	220	100
12/15/24	100		± 24	100	

2. EMC compliance circuit

Single output:

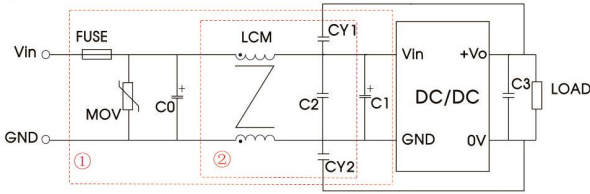


Fig. 6

Notes: We use Part ① in Fig. 6 for immunity and part ② for emissions test.
Selecting based on needs.

Dual output:

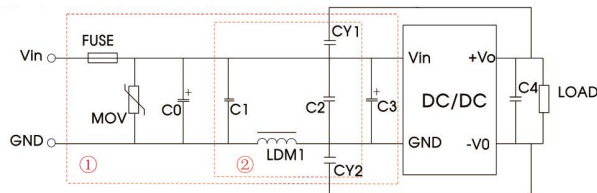


Fig.7


Notes: We use Part ① in Fig. 7 for immunity and part ② for emissions test.
Selecting based on needs.

Parameter description:

Model	Vin:24VDC	Vin:48VDC
FUSE	Choose according to actual input current	
MOV	S20K30	S14K60
C0	680μF/50V	330μF/100V
C1	330μF/50V	330μF/100V
C2	4.7μF/50V	2.2μF/100V
C3	Refer to the Cout in Fig.5	
LCM	1mH	
CY1/CY2	1nF/2kV	

Model	Vin:24VDC	Vin:48VDC
FUSE	Choose according to actual input current	
MOV	S20K30	S14K60
C0	680μF/50V	330μF/100V
C1/C2	2.2μF/50V	2.2μF/100V
C3	330μF/50V	330μF/100V
C4	Refer to the Cout in Fig.5	
LDM1	3.3μH	
CY1/CY2	2.2nF/400VAC Safety Y Capacitor	

3. Trim Function for Output Voltage Adjustment (open if unused)

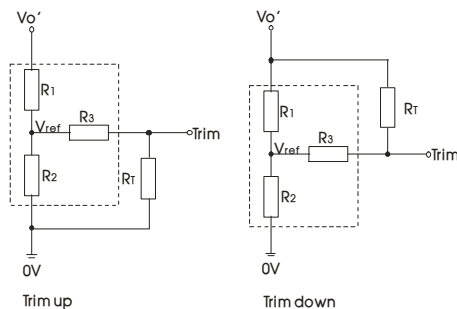

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:


$$\begin{aligned} \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R_T = Trim Resistor value
 α = self-defined parameter
 V_o' = desired output voltage


Vout(VDC)	R1(kΩ)	R2(kΩ)	R3(kΩ)	Vref(V)
3.3	4.801	2.87	12.4	1.24
5	2.883	2.87	10	2.5
9	7.500	2.87	15	2.5
12	11.000	2.87	15	2.5
15	14.494	2.87	15	2.5
24	24.872	2.87	17.8	2.5

4. The products do not support parallel connection of their output

Horizontal Package (without heat sink) Dimensions Recommended Layout

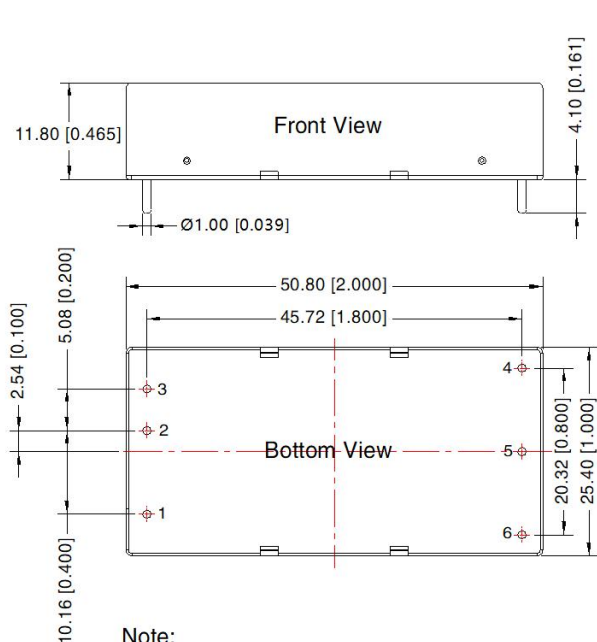


THIRD ANGLE PROJECTION

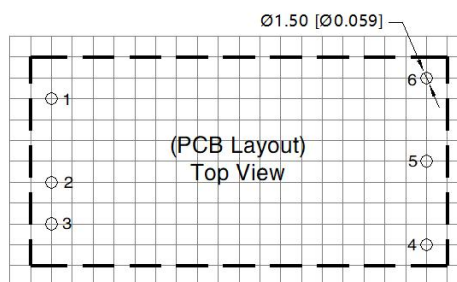


Pin-Out		
Pin	Single	Dual
1	Ctrl	Ctrl
2	GND	GND
3	Vin	Vin
4	+Vo	+Vo
5	0V	0V
6	Trim	-Vo

Horizontal Package (with heat sink) Dimensions

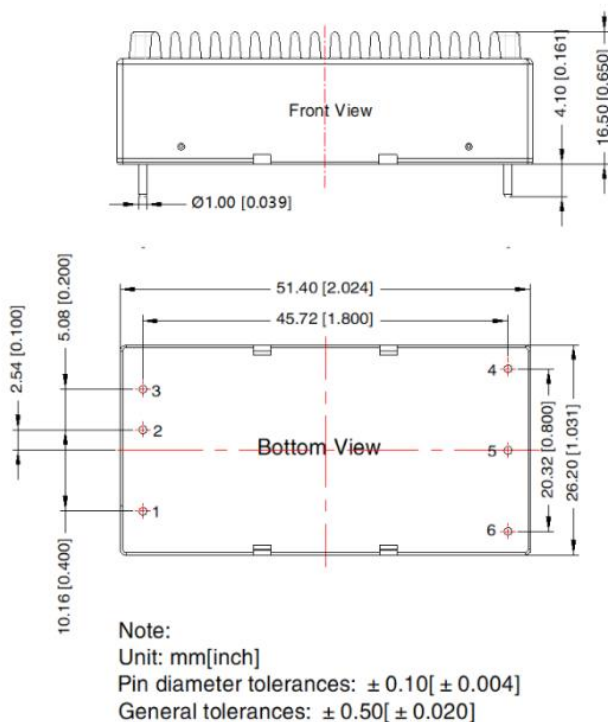


THIRD ANGLE PROJECTION

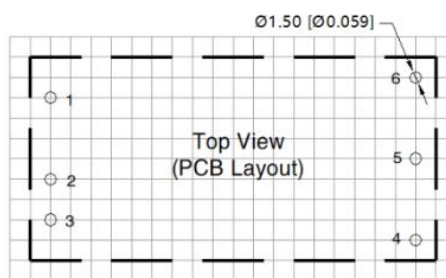


Pin-Out		
Pin	Single	Dual
1	Ctrl	Ctrl
2	GND	GND
3	Vin	Vin
4	+Vo	+Vo
5	0V	0V
6	Trim	-Vo

E2S (without heat sink) Dimensions

THIRD ANGLE PROJECTION

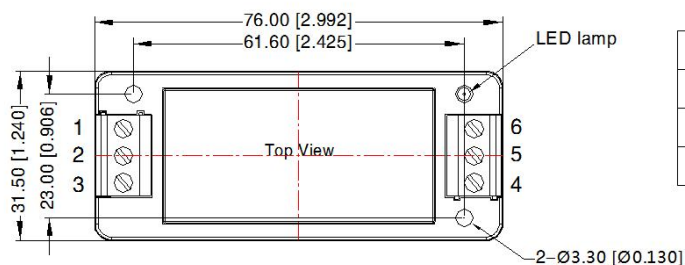


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	+Vo	0V	Trim
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo

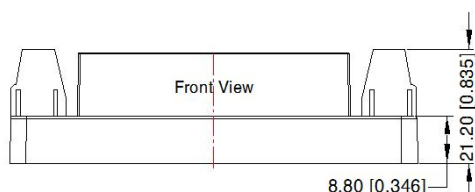


Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: $\pm 1.00 [\pm 0.039]$

E2S (with heat sink) Dimensions

THIRD ANGLE PROJECTION

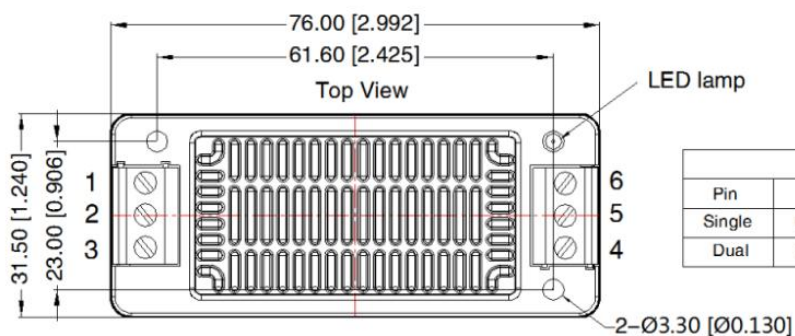


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	+Vo	0V	Trim
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo

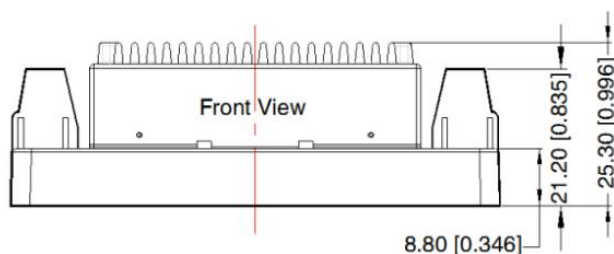


Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: $\pm 1.00 [\pm 0.039]$

D4S (without heat sink) Dimensions

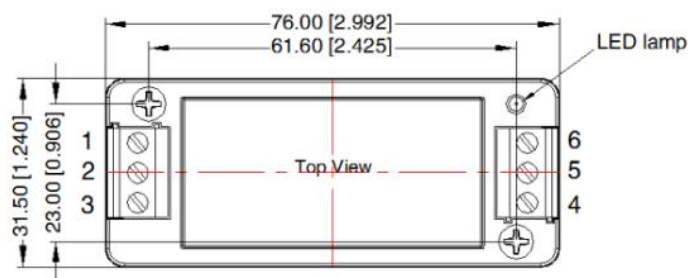
THIRD ANGLE PROJECTION 

Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	+Vo	0V	Trim
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo

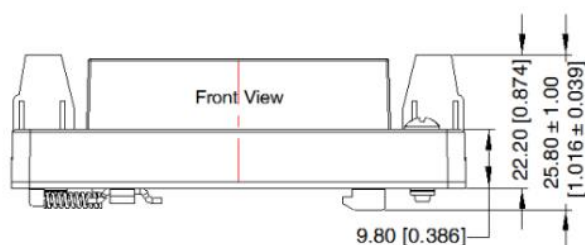


Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24~12 AWG
 Tightening torque: Max 0.4 N·m
 General tolerances: ± 1.00 [± 0.039]

D4S (with heat sink) Dimensions

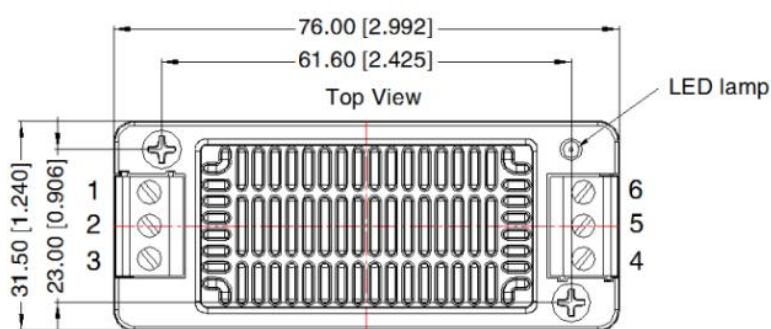THIRD ANGLE PROJECTION 

Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	+Vo	0V	Trim
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo

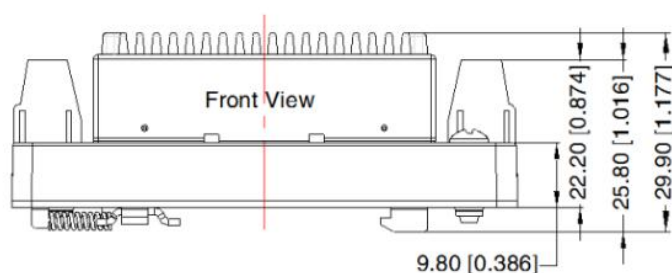

Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24~12 AWG
 Tightening torque: Max 0.4 N·m
 General tolerances: ± 1.00 [± 0.039]

Notes:

1. The maximum capacitive load offered were tested at input voltage range and full load;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.