

DESCRIPTIONS

200W, AC/DC Enclosed Switching Power Supply



RoHS



UL62368-1

EN62368-1

BS EN62368-1

FEATURES

- Universal 85 - 305VAC or 120 - 430VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Semi-potted process, fanless design
- Operating ambient temperature range: -40°C to +70°C
- High efficiency, active PFC
- 150% peak load output for 1 second
- High I/O isolation test voltage up to 4000VAC
- Output short circuit, over-current, over-voltage, over-temperature protection
- Operating altitude up to 5000m

APPLICATIONS

- Industrial
- Lighting
- Electricity
- Security
- Telecommunications
- Smart Home

Selection Guide

| Certification | Part No* | Output Power (W) | Nominal Output Voltage and Current (Vo/Io) | Output Voltage Adjustable Range (V) | Efficiency at 230VAC (%) Typ. | Capacitive Load (uF) Max. |
|---------------|-------------|------------------|--------------------------------------------|-------------------------------------|-------------------------------|---------------------------|
| UL/EN/BS EN | AEFUH200-05 | 200 | 5V/40A | 4.5-5.5 | 91 | 10000 |
| | AEFUH200-12 | 200.4 | 12V/16.7A | 11.4-12.6 | 93 | 8000 |
| EN/BS EN | AEFUH200-24 | 201.6 | 24V/8.4A | 22.8-25.2 | 94 | 5000 |
| | AEFUH200-28 | 200.2 | 28V/7.15A | 26.6-29.4 | 94 | 4000 |
| | AEFUH200-36 | 201.6 | 36V/5.6A | 34.2-37.8 | 94 | 3000 |
| | AEFUH200-48 | 201.6 | 48V/4.2A | 45.6-50.4 | 94 | 2000 |
| | AEFUH200-54 | 199.8 | 54V/3.7A | 51.3-56.7 | 94 | 1000 |





Note:1. *The product picture is for reference only, for details, please refer to the actual product.

2. *12V, 24V output product with optional salt-spray proof at terminal: AEFUH200-xx-YW.

3. *For products with terminal cover, please order "CPJ-062" for self-installation;.

Specifications

| Product Specifications | Item | Operating Conditions | | Min. | Typ. | Max. | Unit | |
|------------------------|--------------------------|-------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------|-------------|-------|------|------|
| Input Specifications | Input Voltage Range | Rated input (Certified voltage) | | 100 | -- | 277 | VAC | |
| | | AC input | | 85 | -- | 305 | | |
| | | DC input | | 120 | -- | 430 | VDC | |
| | Input Voltage Frequency | | | 47 | -- | 63 | Hz | |
| | Input Current | 115VAC | | -- | 2.1 | 2.5 | A | |
| | | 230VAC | | -- | 1.0 | 1.2 | | |
| | Inrush Current | 115VAC | Cold start | -- | 40 | -- | | |
| | | 230VAC | | -- | 80 | -- | | |
| | Power Factor | 115VAC | Full load | -- | 0.98 | -- | -- | |
| | | 230VAC | | -- | 0.95 | -- | | |
| | Leakage Current | 240VAC | | | < 0.5mA | | | |
| | Hot Plug | | | | Unavailable | | | |
| Output Specifications | Output Voltage Accuracy | Full load range | 5V | -- | ±2.0 | -- | % | |
| | | | 12V/24V/28V/36V/48V/54V | -- | ±1.0 | -- | | |
| | Line Regulation | Rated load | 5V | -- | ±0.5 | -- | | |
| | | | 12V/24V/28V/36V/48V/54V | -- | ±0.3 | -- | | |
| | Load Regulation | 0% - 100% load | 5V | -- | ±1.0 | -- | | |
| | | | 12V/24V/28V/36V/48V/54V | -- | ±0.5 | -- | | |
| | Ripple & Noise* | 20MHz bandwidth, 25°C (peak-to-peak value) | 5V | -- | -- | 200 | mV | |
| | | | 12V/24V/28V/36V | -- | -- | 240 | | |
| | | | 48V/54V | -- | -- | 300 | | |
| | Temperature Coefficient | | | | -- | ±0.03 | -- | %/°C |
| | Minimum Load | | | | 0 | -- | -- | % |
| | Hold-up Time | 115VAC/230VAC | | | 10 | -- | -- | ms |
| | Short Circuit Protection | Recovery time <10s after the short circuit disappear. | 5V | Hiccup mode, constant current (200%Io-300%Io) works 200ms, turn off 10s, continuous, self-recover | | | | |
| | | | 12V/24V/36V/48V/54V | Hiccup mode, constant current (200%Io-300%Io) works 1s, turn off 10s, continuous, self-recover | | | | |
| | Over-current Protection | 230VAC, rated load | Normal temperature, high temperature | 105% - 200% Io, delay protection, delay time 1s, self-recovery after the abnormality is removed | | | | |
| | | | Low temperature | ≥105%Io, delay protection, delay time | | | | |





| | | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|----------------------------------------------------|----------------|-----|-----|----|--------|
| | | | | | 1s, self-recovery after the abnormality is removed | | | | | |
| | Over-voltage Protection | | 5V | | < 6.3V (Hiccup, self-recover) | | | | | |
| | | | 12V | | < 16V (Hiccup, self-recover) | | | | | |
| | | | 24V | | < 35V (Hiccup, self-recover) | | | | | |
| | | | 28V | | < 35V (Hiccup, self-recover) | | | | | |
| | | | 36V | | < 47V (Hiccup, self-recover) | | | | | |
| | | | 48V | | < 60V (Hiccup, self-recover) | | | | | |
| | | | 54V | | < 63V (Hiccup, self-recover) | | | | | |
| Over-temperature Protection | | | | Output voltage turn off, self-recover after the temperature drops | | | | | | |
| General Specifications | Isolation Test | Input -  | Electric strength test for 1min., leakage current <5mA | | 2000 | -- | -- | VAC | | |
| | | Input - output | | | 4000 | -- | -- | | | |
| | | Output -  | | | 1250 | -- | -- | | | |
| | Insulation Resistance | Input -  | Ambient temperature: 25 ± 5°C Relative humidity: < 95%RH, no condensation Test voltage: 500VDC | | 100 | -- | -- | MΩ | | |
| | | Input - output | | | 100 | -- | -- | | | |
| | | Output -  | | | 100 | -- | -- | | | |
| | Operating Temperature | | | | -40 | -- | +70 | °C | | |
| | Storage Temperature | | | | -40 | -- | +85 | | | |
| | Storage Humidity | | Non-condensing | | 10 | -- | 95 | %RH | | |
| | Operating Humidity | | | | 20 | -- | 90 | | | |
| | Power Derating | | Operating temperature derating | With aluminum plate* | | -40°C to -30°C | 4.0 | -- | -- | % / °C |
| | | | | | | +50°C to +70°C | 2.0 | -- | -- | |
| | | | | Without aluminum plate | 230VAC, others | -40°C to -30°C | 4.0 | -- | -- | |
| | | | | | | +50°C to +70°C | 3.0 | -- | -- | |
| | | | | | 230VAC, 5V & 100VAC, others; 80%Io | -40°C to -30°C | 2.0 | -- | -- | |
| | | | | | | +50°C to +70°C | 2.0 | -- | -- | |
| | | | | | 100VAC, 5V, 60%Io | +50°C to +70°C | 1.0 | -- | -- | |
| | | | | | | | | | | |
| Input voltage derating | | | | | 85VAC -100VAC | | 2.0 | -- | -- | |
| Safety Class | | | | CLASS I | | | | | | |
| MTBF | | MIL-HDBK-217F@25°C | | > 300,000 h | | | | | | |
| Mechanical Specifications | Case Material | | Metal (AL6063, SGCC) | | | | | | | |
| | Dimensions | | 194.00mm x 55.00mm x 26.00mm | | | | | | | |
| | Weight | | 430g (Typ.) | | | | | | | |
| | Cooling Method | | Free air convection | | | | | | | |
| Note: 1.*The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor; | | | | | | | | | | |

2.*In order to optimize the heat dissipation performance, when the aluminum plate is used for auxiliary heat dissipation, please note: 1. The size of the aluminum plate is 450mm × 450mm × 3mm; 2. The surface of the aluminum plate must be coated with thermal grease; 3. The product must be tightly attached to the aluminum plate.

Electromagnetic Compatibility (EMC)



| | | | | |
|-------------------------------------------|--------------------|-------------------------------------------------------|----------------------------------------------------|------------------------------|
| Electromagnetic Compatibility (EMC) | Emissions (EMI) | CE (Input port) | CISPR32 EN55032 150K - 30MHz | CLASS B |
| | | RE | CISPR32 EN55032 30MHz - 2GHz | CLASS B |
| | | Harmonic current | IEC/EN61000-3-2 | CLASS A, CLASS C and CLASS D |
| | Immunity (EMS) | ESD | IEC/EN 61000-4-2 Contact ±6KV/Air ±8KV | perf. Criteria A |
| | | RS | IEC/EN 61000-4-3 10V/m | perf. Criteria A |
| | | EFT | IEC/EN 61000-4-4 ±4KV | perf. Criteria A |
| | | Surge | IEC/EN 61000-4-5 line to line ±2KV/line to PE ±4KV | perf. Criteria A |
| | | CS | IEC/EN61000-4-6 0.15 - 80MHz 10 Vr.m.s | perf. Criteria A |
| | | Voltage dip, short interruption and voltage variation | IEC/EN61000-4-11 0%, 70% | perf. Criteria B |
| | | Intercom interference test | MS-SOP-DQC-007 | perf. Criteria B |

Characteristic Curve

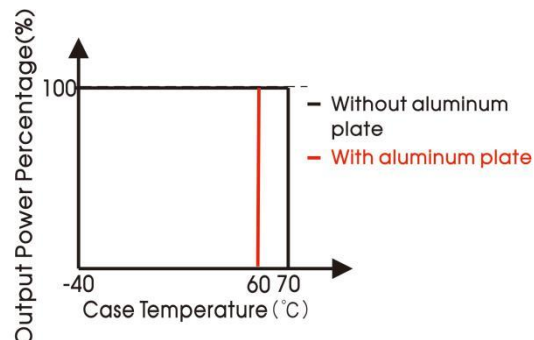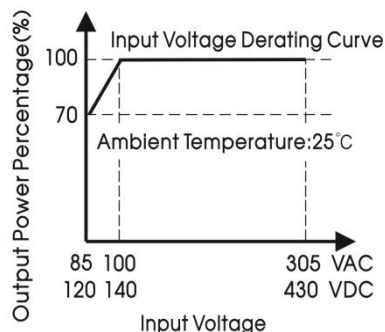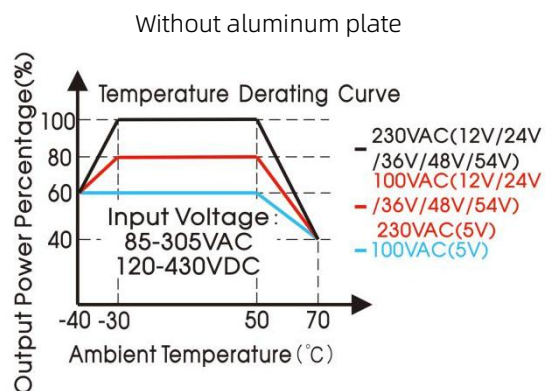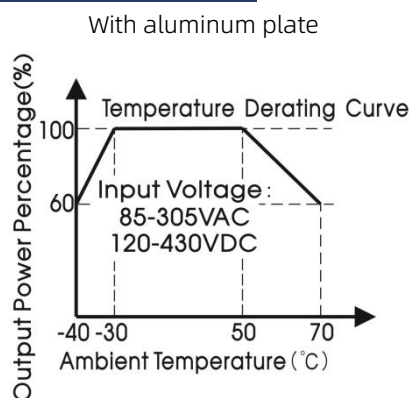


Note: 1. With an AC input voltage between 85 -100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling.

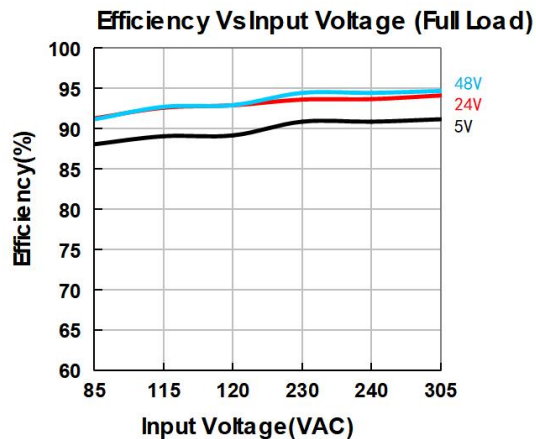
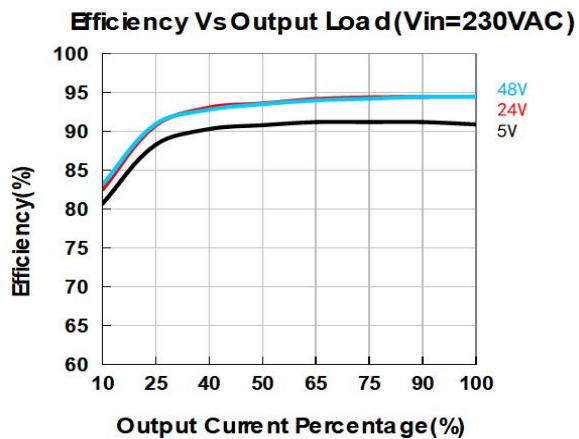


Installation Diagram

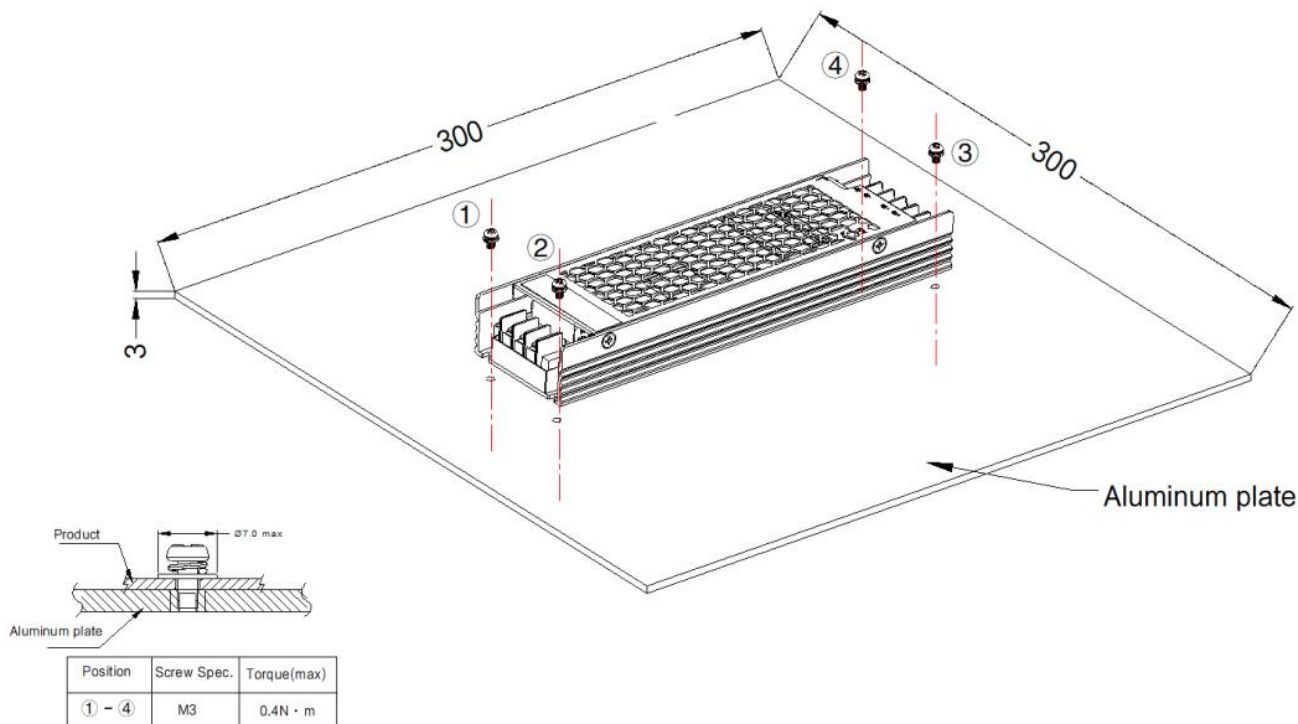



Note: 1. In order to meet the "Derating Curve", the product testing must be installed onto an aluminum plate. The size of the suggested aluminum plate is shown as above. And for optimizing thermal performance, it is necessary to apply thermal grease on the bottom of the product.
2. It is suggested to install the product with M3 combination screws, and the product must be firmly installed at the center of the aluminum plate.

Dimensions and Recommended

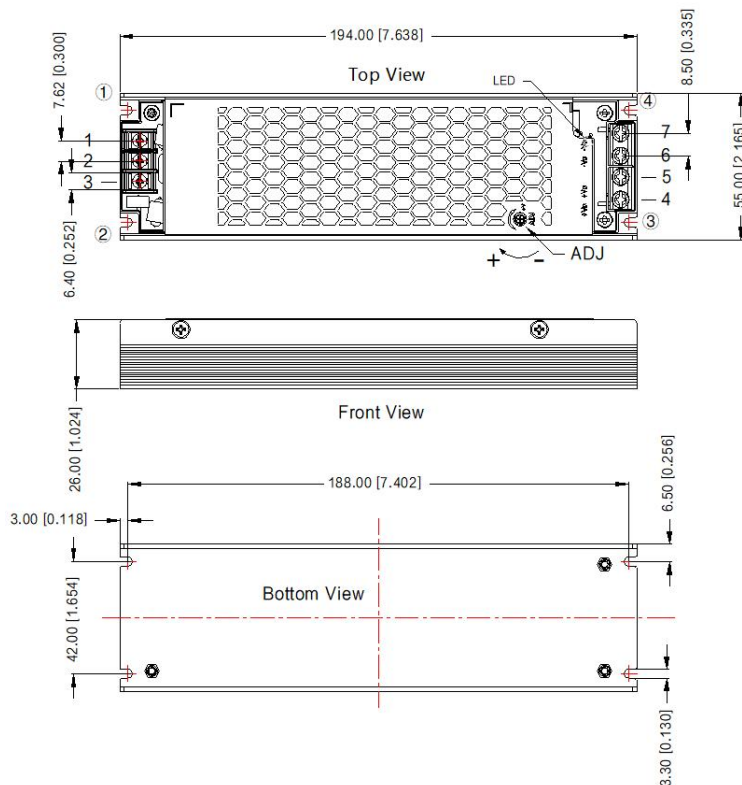
THIRD ANGLE PROJECTION 

Right View



| Pin-Out | |
|---------|-------------------------------------------------------------------------------------|
| Pin | Mark |
| 1 |  |
| 2 | AC(L) |
| 3 | AC(N) |
| 4 | +Vo |
| 5 | +Vo |
| 6 | -Vo |
| 7 | -Vo |

Connector wires range

| Pro. No | Input connector | Output connector (single wire) | Output connector (double wires) | Output connector (double wires) Pic. |
|--------------|---------------------|--------------------------------|---------------------------------|-------------------------------------------------------------------------------------|
| 5V | | No suggested | 14-12AWG | |
| 12V | 22-14AWG | 14-12AWG | 18-12AWG | |
| 24/36/48V | | 18-12AWG | 20-12AWG | |
| Screw/torque | M3.0, Max 0.5N·m | M3.5, Max 0.8N·m | |  |


Note:

Unit: mm[inch]

ADJ: Output voltage adjustable resistor

General tolerances: $\pm 1.00 [\pm 0.039]$

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% RH with nominal input voltage and rated output load;
2. The room temperature derating of $5^\circ\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. The out case needs to be connected to PE () of system when the terminal equipment in operating;
7. The output voltage can be adjusted by the ADJ, clockwise to increase;
8. If product involves multi-brand materials and there are differences in color etc, please refer to the standards of each manufacturer;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
10. The power supply is considered a component which will be installed into a terminal equipment.