

# AME185



### ► Features

- 18.5" 1366x768 LCD Touch Panel
- Projected Capacitive Multi-touch
- Support Emergency Button and Press Button on Front Bezel
- 1 DVI-I, 1 VGA
- Support Keyboard Holder



### ► Panel




Back View



Bottom View

### ► Dimensions

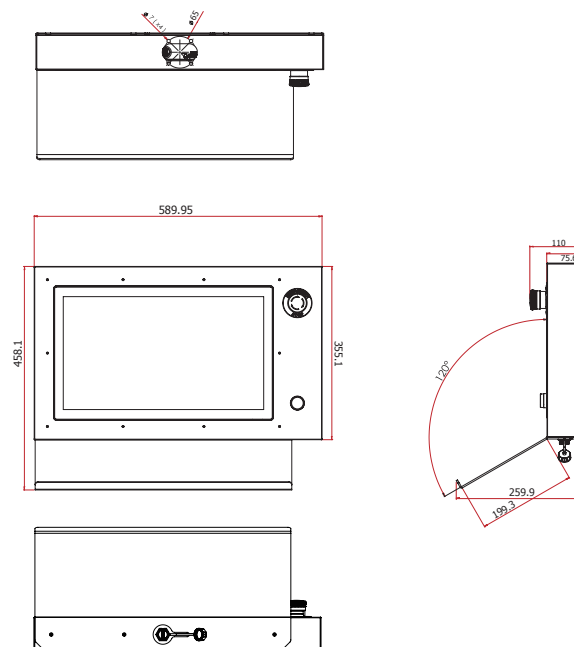

## ► Specifications

<b>DISPLAY AND TOUCH SCREEN</b>	<b>Display</b>	18.5" 1366x768 TFT LCD Panel with Capacitive/5-Wire Resistive Touch Screen
	<b>Brightness</b>	450 cd/m <sup>2</sup>
	<b>Contrast</b>	1000:1
	<b>Response Time</b>	8ms
	<b>Active Area</b>	409.8mm x 230.4mm (H x V)
	<b>View Angle</b>	85°/85°/80°/80° (L/R/U/D)
	<b>Backlight Lifetime</b>	50,000 hours
<b>Front I/O</b>	<b>Buttons</b>	1 x Emergency Button 1 x Press Button 1 x Keyboard Holder
<b>Bottom I/O</b>	<b>USB</b>	1 x USB 2.0 1 x mini USB 2.0
	<b>Display</b>	1 x DVI-I 1 x VGA
<b>POWER</b>	<b>Type</b>	24V / 5A DC
	<b>Connector</b>	DC Jack
<b>MECHANISM</b>	<b>Construction</b>	Sheet Metal
	<b>IP Rating</b>	IP65 Front Panel Protection
	<b>Mounting</b>	Panel/VESA Mount
	<b>Dimensions (W x H x D)</b>	TBD
	<b>Weight</b>	TBD
<b>ENVIRONMENT</b>	<b>Operating Temperature</b>	0 to 50°C
	<b>Storage Temperature</b>	-20 to 60°C
	<b>Relative Humidity</b>	10 to 90% RH (non-condensing)
<b>STANDARDS AND CERTIFICATIONS</b>	<b>Shock</b>	TBD
	<b>Vibration</b>	TBD
	<b>Certifications</b>	TBD

## ► Packing List

• 1 AME185 Monitor
• 1 Power Cord
• 1 Quick Guide