

Descriptions

15W isolated, DC/DC Converter



RoHS



Report



Report

UL62368-1

EN62368-1

BS EN62368-1

Features

- Ultra-wide 4:1 input voltage range
- High efficiency up to 91%
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current, over-voltage protection
- Operating ambient temperature range -40°C to +105°C
- CISPR32/EN55032 CLASS A EMI compliant without external components
- Input reverse polarity protection available with chassis(E2) or 35mm DIN-rail mounting(D4) version
- Industry standard pin-out
- Meets EN50155 railway standard

Applications

- Industrial control
- Electric power
- Communication
- Railway
- Instrumentation

Selection Guide

Certification	Part No. ^①	Input Voltage (VDC)		Output		Full Load Efficiency ^② (%) Min./Typ.	Capacitive Load (μF)Max.
		Nominal ^② (Range)	Max. ^③	Voltage (VDC)	Current(mA) Max./Min.		
EN/BS EN	DWMD15-B2403	24 (9-36)	40	3.3	4000/0	86/88	4700
UL/EN/BS EN	DWMD15-B2405			5	3000/0	88/90	4700
UL/EN/BS EN	DWMD15-B2412			12	1250/0	88/90	1000
UL/EN/BS EN	DWMD15-B2415			15	1000/0	89/91	820
UL/EN/BS EN	DWMD15-B2424			24	625/0	89/91	270
EN/BS EN	DWMD15-B4803	48 (18-75)	80	3.3	4000/0	86/88	4700
	DWMD15-B4805			5	3000/0	88/90	4700

	DWMD15-B4812			12	1250/0	89/91	1000
	DWMD15-B4815			15	1000/0	89/91	820
	DWMD15-B4824			24	625/0	89/91	270

Note:

①Use "H" suffix for heat sink mounting, "E2" suffix for chassis mounting and "D4" suffix for DIN-Rail mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;

②The E2 and D4 Model's start-up and minimum input voltages are increased by 1VDC due to the input reverse polarity protection circuit;

③Exceeding the maximum input voltage may cause permanent damage;

④Efficiency is measured at nominal input voltage and rated output load; efficiencies for E2 and D4 model is decreased by 2% due to the input reverse polarity protection circuit.

Specifications

Product Specifications	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage	3.3V output	--	625/30	640/50	mA
			5V output	--	694/30	710/50	
			12V output	--	694/6	710/15	
			15V output	--	687/6	703/15	
			24V output	--	687/10	703/20	
		48VDC nominal input series, nominal input voltage	3.3V output	--	313/15	320/30	
			5V output	--	348/15	356/30	
			12V output	--	344/3	352/11	
			15V output	--	344/3	352/11	
			24V output	--	344/4	352/11	
	Reflected Ripple Current	Nominal input voltage		--	30	--	VDC
	Surge Voltage (1sec. max.)	24VDC nominal input series		-0.7	--	50	
		48VDC nominal input series		-0.7	--	100	
	Start-up Voltage	24VDC nominal input series		--	--	9	
		48VDC nominal input series		--	--	18	
	Input under-voltage protection	24VDC nominal input series		5.5	6.5	--	
		48VDC nominal input series		12	15.5	--	
	Start-up Time	Nominal input voltage & constant resistance load		--	10	--	ms
	Input Filter			Pi filter			
	Hot Plug			Unavailable			
Output Specifications	Ctrl ^①	Module on		Ctrl pin open or pulled high (TTL 3.5-12VDC)			
		Module off		Ctrl pin pulled low to GND (0-1.2VDC)			
		Input current when off		--	2	7	mA
	Voltage Accuracy	0%-100% load		--	±1	±3	%
	Linear Regulation	Input voltage variation from low to high at full load		--	±0.2	±0.5	
	Load Regulation	5%-100% load		--	±0.5	±1	μs
	Transient Recovery Time	25% load step change,	All	--	300	500	
	Transient Response	nominal input voltage	3.3, 5V output	--	±3	±7	%

	Deviation		Others	--	±3	±5	
	Temperature Coefficient	Full load		--	--	±0.03	%/°C
	Ripple & Noise ^②	20MHz bandwidth, 100% load		--	50	100	mV p-p
	Trim	Input voltage range		90	--	110	%Vo
	Over-voltage Protection			110	--	160	
	Over-current Protection			110	150	190	%Io
	Short circuit Protection			Continuous, self-recovery			
General Specifications	Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.		1500	--	--	VDC
		Input/output-case Electric Strength Test for 1 minute with a leakage current of 1mA max.		1000	--	--	
	Insulation Resistance	Input-output resistance at 500VDC		1000	--	--	MΩ
	Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		--	2000	--	pF
	Operating Temperature	See Fig. 1	3.3, 5V output	-40	--	+95	°C
			Others	-40	--	+105	
	Storage Temperature			-55	--	+125	
	Storage Humidity	Non-condensing		5	--	95	%RH
	Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds		--	--	+300	°C
	Vibration			IEC/EN61373 - Category 1, Grade B			
	Switching Frequency ^③	PWM mode	3.3V, 5V output	--	300	--	kHz
			Others	--	270	--	
	MTBF	MIL-HDBK-217F@25°C		1000	--	--	k hours
Mechanical Specifications	Case Material	Aluminum alloy					
	Dimensions	Horizontal package(without heat sink)		25.40 × 25.40 × 11.70 mm			
		Horizontal package(with heat sink)		25.40 × 25.40 × 16.20 mm			
		E2 chassis package (without heat sink)		76.00 × 31.50 × 21.20 mm			
		E2 chassis package(with heat sink)		76.00 × 31.50 × 25.20 mm			
		D4 Din-rail package(without heat sink)		76.00 × 31.50 × 25.80 mm			
		D4 Din-rail package(with heat sink)		76.00 × 31.50 × 29.80 mm			
	Weight	Without heat sink	Horizontal package/E2 chassis package/D4 rail package		15.0g/38.0g/58.0g (Typ.)		
		With heat sink	Horizontal package/E2 chassis package/D4 rail package		19.0g/42.0g/62.0g (Typ.)		
Cooling method	Free air convection						
Note:							
①The Ctrl pin voltage is referenced to input GND.							
②Under 0% -5% load conditions, ripple & noise does not exceed 5%Vo. The "parallel cable" method is used for Ripple and Noise test							
③Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.							

Electromagnetic Compatibility (EMC)


Emissions	CE	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.3-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.3-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{kV}$, Air $\pm 8\text{kV}$	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{kV}$ (see Fig.3-① for recommended circuit)	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{kV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

Electromagnetic Compatibility (EMC) (EN50155)

Emissions	CE	EN50121-3-2	150kHz-500kHz	99dBuV (see Fig.3-② for recommended circuit)	
		EN55016-2-1	500kHz-30MHz	93dBuV (see Fig.3-② for recommended circuit)	
	RE	EN50121-3-2	30MHz-230MHz	40dBuV/m at 10m (see Fig.3-② for recommended circuit)	
		EN55016-2-1	230MHz-1GHz	47dBuV/m at 10m (see Fig.3-② for recommended circuit)	
Immunity	ESD	EN50121-3-2	Contact $\pm 6\text{kV}$ /Air $\pm 8\text{kV}$		perf. Criteria A
	RS	EN50121-3-2	20V/m		perf. Criteria A
	EFT	EN50121-3-2	$\pm 2\text{kV}$ 5/50ns 5kHz (see Fig.3-① for recommended circuit)		perf. Criteria A
	Surge	EN50121-3-2	line to line $\pm 1\text{kV}$ (42 Ω , 0.5 μF) (see Fig.3-① for recommended circuit)		perf. Criteria A
	CS	EN50121-3-2	0.15MHz-80MHz 10V r.m.s		perf. Criteria A

Characteristic Curve

Nominal input voltage, 12V, 15V, 24V output

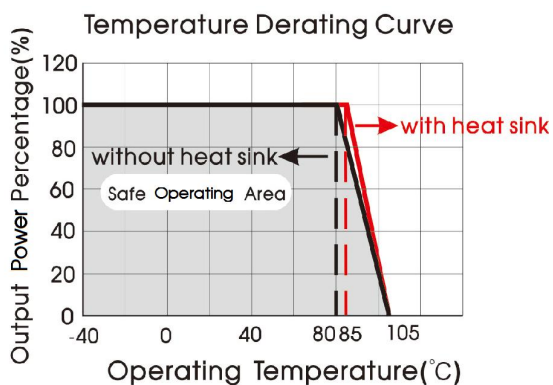

Nominal input voltage, 3.3V, 5V output





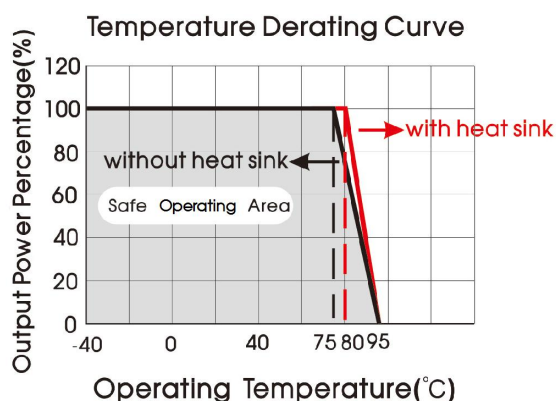


Fig. 1

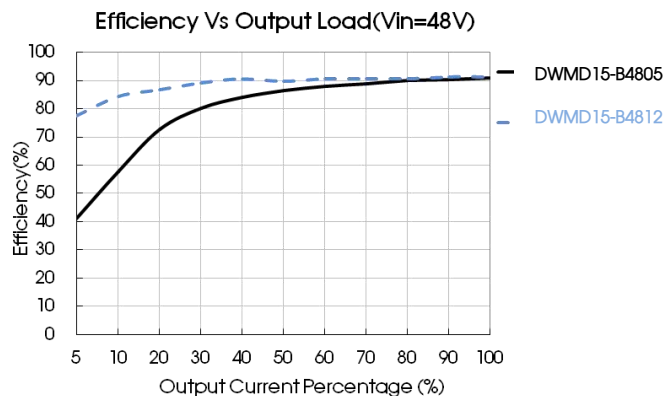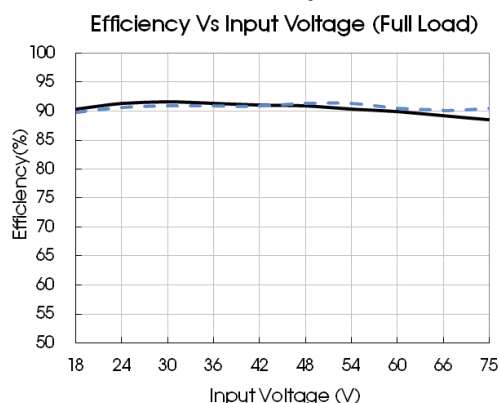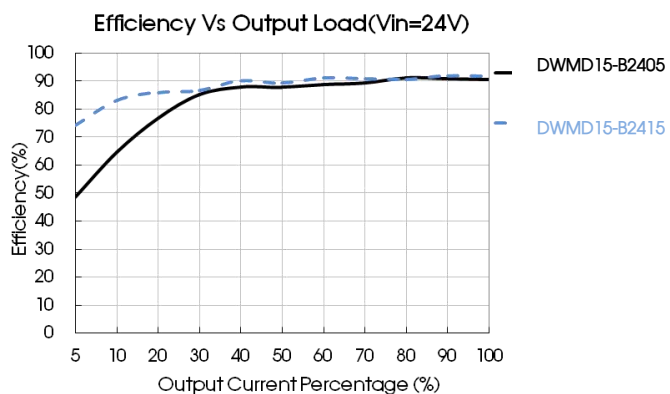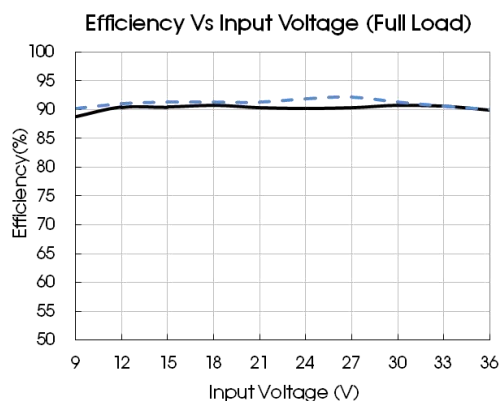

Design Reference

1. Typical application

All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

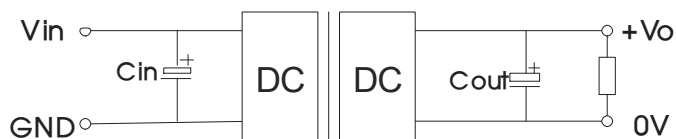


Fig. 2

Vin (VDC)	Vout (VDC)	Cin	Cout
24	3.3/5	100μF/50V	100μF/16V
	12/15		100μF/25V
	24		47μF/50V
48	3.3/5	100μF/100V	100μF/16V
	12/15		100μF/25V
	24		47μF/50V

2. EMC compliance circuit

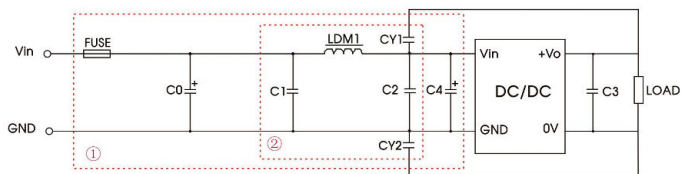



Fig. 3

Notes: We use Part ① in Fig. 3 for Immunity tests and Part ② for Emissions test.
Selecting based on needs.

Parameter description:

Model	Vin: 24VDC	Vin: 48VDC
FUSE	Select fuse value according to actual input current	
C0, C4	330μF/50V	330μF/100V
C1, C2	4.7μF/50V	4.7μF/100V
C3	Refer to the Cout in Fig.2	
LDM1	2.2μH/4A	2.2μH/2A
CY1, CY2	1nF/2kV	

3. Trim Function for Output Voltage Adjustment (open if unused)

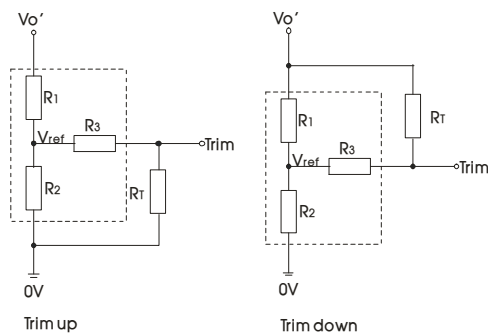

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:


$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2 - a} - R_3 & a &= \frac{V_{ref}}{V_{O'} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1 - a} - R_3 & a &= \frac{V_{O'} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R_T is Trim resistance
 a is a self-defined parameter, with no real meaning.


Vout(V)	R1(kΩ)	R2(kΩ)	R3(kΩ)	Vref(V)
3.3	4.772	2.87	15	1.25
5	2.894	2.87	10	2.5
12	11.000	2.87	17.4	2.5
15	14.494	2.87	17.4	2.5
24	24.872	2.87	20	2.5

4. The products do not support parallel connection of their output

Horizontal Package (without heat sink) Dimensions and Recommended Layout

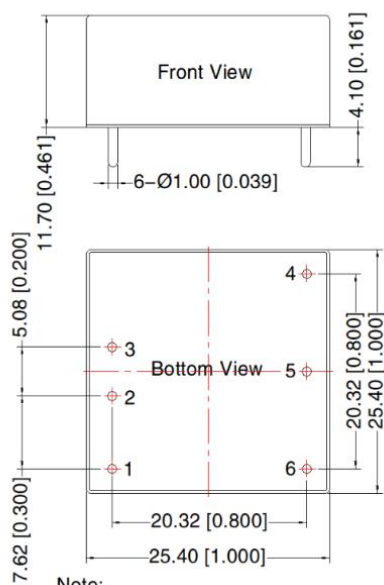


Note:
Unit: mm[inch]
PIN1/2/3/4/5/6: ϕ 1.0mm
Pin diameter tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.50 [± 0.020]

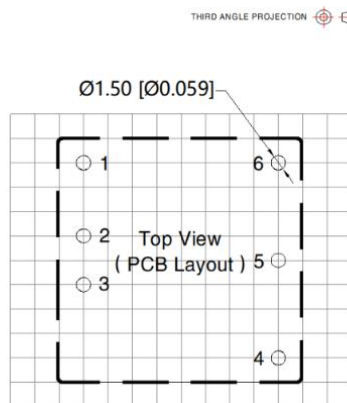


Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	Ctrl
2	GND
3	Vin
4	+Vo
5	Trim
6	0V

Horizontal Package (with heat sink) Dimensions

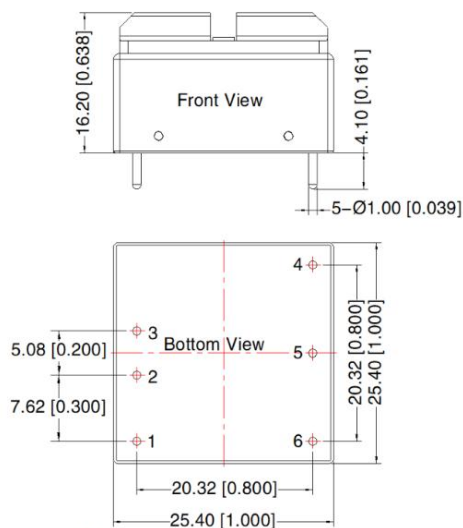


Note:
Unit: mm[inch]
PIN1/2/3/4/5/6: ϕ 1.0mm
Pin diameter tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.50 [± 0.020]

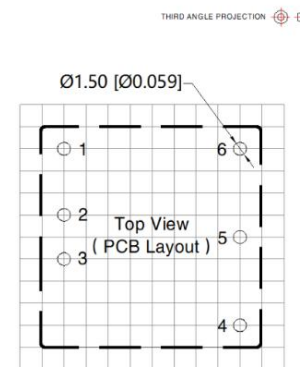

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	Ctrl
2	GND
3	Vin
4	+Vo
5	Trim
6	0V

E2 (without heat sink) Dimensions

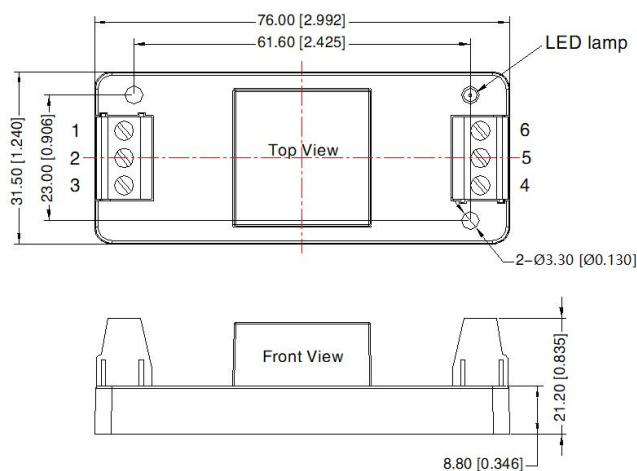THIRD ANGLE PROJECTION 

Pin-Out						
Pin	1	2	3	4	5	6
Mark	Ctrl	GND	Vin	+Vo	Trim	0V

Note:


Unit: mm[inch]

Wire range: 24–12 AWG

Tightening torque: Max 0.4 N · m

General tolerances: $\pm 1.00 [\pm 0.039]$

E2 (with heat sink) Dimensions

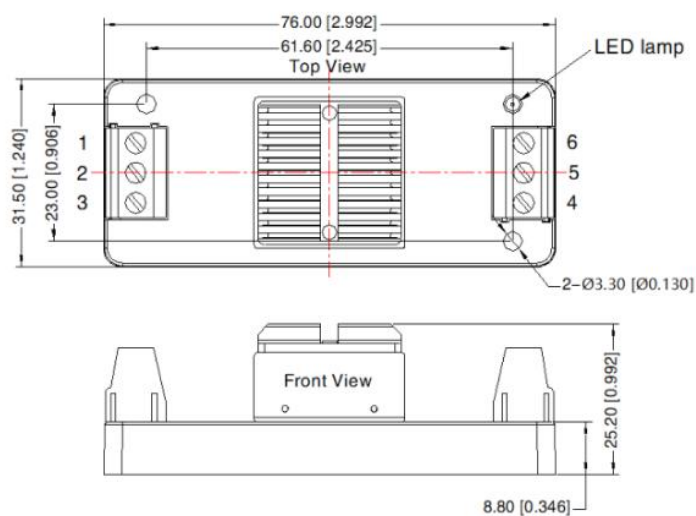THIRD ANGLE PROJECTION 

Pin-Out						
Pin	1	2	3	4	5	6
Mark	Ctrl	GND	Vin	+Vo	Trim	0V

Note:

Unit: mm[inch]


Wire range: 24–12 AWG

Tightening torque: Max 0.4 N · m

General tolerances: $\pm 1.00 [\pm 0.039]$

D4 (without heat sink) Dimensions

THIRD ANGLE PROJECTION

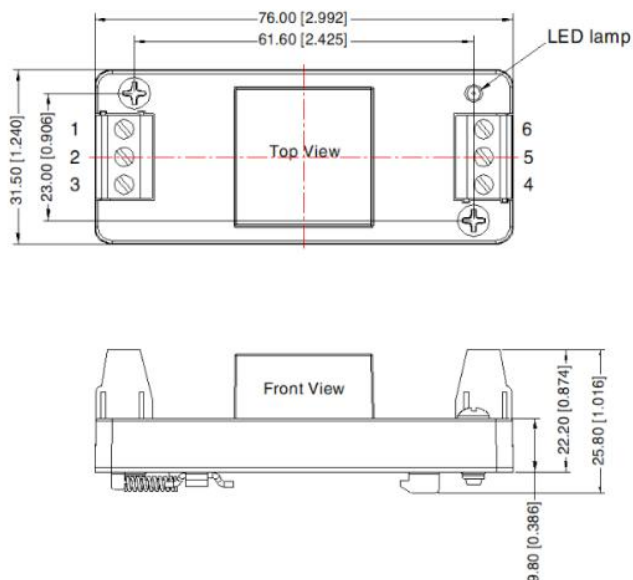


Pin-Out						
Pin	1	2	3	4	5	6
Mark	Ctrl	GND	Vin	+Vo	Trim	0V

Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24-12 AWG
 Tightening torque: Max 0.4 N · m
 General tolerances: $\pm 1.00 [\pm 0.039]$

D4 (with heat sink) Dimensions

THIRD ANGLE PROJECTION

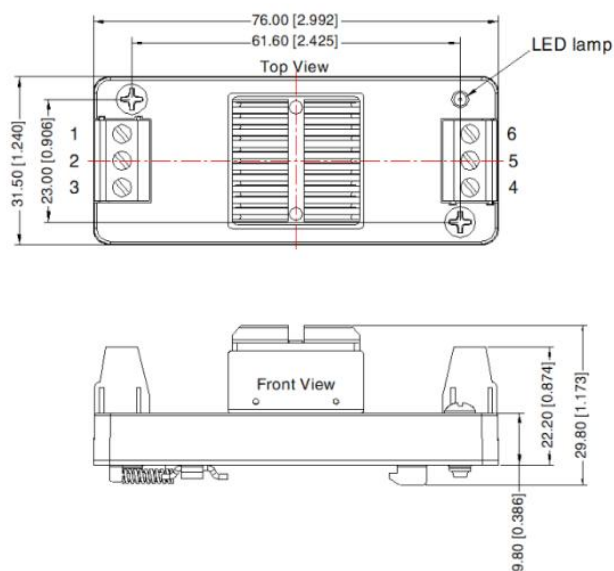

Pin-Out						
Pin	1	2	3	4	5	6
Mark	Ctrl	GND	Vin	+Vo	Trim	0V

Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24-12 AWG
 Tightening torque: Max 0.4 N · m
 General tolerances: $\pm 1.00 [\pm 0.039]$

Note:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.