

DESCRIPTIONS

3W, AC/DC Converter



RoHS



CE Report
EN62368-1

UKCA Report
BS EN62368-1

FEATURES

- Ultra-wide 85 - 305VAC and 100 - 430VDC input voltage range
- 1 × 1 inch compact size
- Operating ambient temperature range: -40 °C to +85°C
- Up to 79% efficiency
- No-load power consumption 0.1W
- 5000m altitude application
- Plastic case meets UL94V-0 flammability
- EMI performance meets CISPR32/EN55032 CLASS B, EN55014

APPLICATIONS

- Industrial
- Electric power
- Home appliances
- Instrumentation
- Communication
- Civil applications

Selection Guide

Certification	Part No.	Output Power	nominal Output Voltage and Current(vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
EN/BS EN	APD03-03	3W	3.3V/900mA	71	4000
	APD03-05		5V/600mA	75	3000
	APD03-09		9V/333mA	77	1200
	APD03-12		12V/250mA	77	1200
	APD03-15		15V/200mA	78	680
	APD03-24		24V/125mA	78	220

Note: 1.Use suffix " E2S" for chassis and suffix " D4S" for DIN-Rail mounting;

2.The product picture is for reference only. For details, please refer to the actual product.

Specifications

Product Specifications	Item		Operating Conditions	Min.	Typ.	Max.	Unit
Input Specifications	Input Voltage Range		AC input	85	--	305	VAC
			DC input	100	--	430	VDC
	Input Frequency			47	--	63	Hz
	Input Current		115VAC	--	--	0.08	A
			230VAC	--	--	0.06	
	Inrush Current		115VAC	--	15	--	
			230VAC	--	25	--	
	Leakage Current		277VAC/50Hz	0.25mA RMS Max.			
	Recommended External Input Fuse			1A, slow-blow, required (The actual use needs to be selected according to the application environment)			
Hot Plug			Unavailable				
Output Specifications	Output Voltage Accuracy		3.3V output	--	±3	--	%
			others	--	±2	--	
	Line Regulation		Full load	--	±0.5	--	
	Load Regulation		0%-100% load	--	±1	--	
	Ripple & Noise*		20MHz bandwidth (peak-to-peak value)	--	50	100	mV
	Stand-by Power Consumption		230VAC	--	0.10	--	W
	Temperature Coefficient			--	±0.02	--	%/°C
	Short Circuit Protection			Hiccup, continuous, self-recover			
	Over-current Protection			≥200%Io, self-recover			
	Over-voltage Protection		3.3/5VDC output	≤7.5VDC			
			9VDC output	≤15VDC			
			12VDC output	≤16VDC			
			15VDC output	≤20VDC			
			24VDC output	≤30VDC			
	Minimum Load			0	--	--	%
	Hold-up Time		115VAC input	--	5	--	ms
			230VAC input	--	50	--	
General Specifications	Isolation	Input-Output	Electric Strength Test for 1min, leakage current <5mA	4000	--	--	VAC
	Operating Temperature			-40	--	+85	°C
	Storage Temperature			-40	--	+85	
	Storage Humidity			--	--	+95	%RH
	Soldering Temperature		Wave-soldering	260 ± 5°C; time: 5 - 10s			

		Manual-welding		360 ± 10°C; time: 3 - 5s			
	Switching Frequency			--	65	--	kHz
	Power Derating	+70°C to +85°C	3.3V	2.33	--	--	% / °C
			Others	1.33	--	--	
			85VAC - 100VAC		1.33	--	--
	Altitude			--	--	5000	m
	Safety Class			CLASS II			
	MTBF	MIL-HDBK-217F@25°C		≥2799,000 h			
Designed Life	230VAC	Ta: 25°C 100% load	>150x10 ³ h				
		Ta: 70°C 100% load	>27x10 ³ h				
Mechanical Specifications	Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)					
	Dimension	Horizontal package		25.40 x 25.40 x 17.60 mm			
		E2S chassis mounting		76.00 x 31.50 x 26.40 mm			
		D4S Din-Rail mounting		76.00 x 31.50 x 31.00 mm			
	Weight	Horizontal package		17.5g (Typ.)			
		E2S chassis mounting		38.0g (Typ.)			
		D4S Din-Rail mounting		58.0g (Typ.)			
	Cooling Method	Free air convection					
Note: *The “Tip and barrel method” is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor.							

Electromagnetic Compatibility (EMC)



Electromagnetic Compatibility (EMC)	Emissions (EMI)	CE	CISPR32/EN55032 CLASS B				
			EN55014-1				
		RE	CISPR32/EN55032 CLASS B				
			EN55014-1				
	Immunity (EMS)	ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV			perf. Criteria B	
			EN55014-2			perf. Criteria B	
		RS	IEC/EN61000-4-3 10V/m			perf. Criteria A	
			EN55014-2			perf. Criteria A	
		EFT	IEC/EN61000-4-4 ±2KV			perf. Criteria B	
			IEC/EN61000-4-4 ±4KV (See Fig. 2 for recommended circuit)			perf. Criteria B	
			IEC/EN61000-4-4 ±4KV (See Fig. 3 for recommended circuit)			perf. Criteria A	
			EN55014-2			perf. Criteria B	
		Surge	IEC/EN61000-4-5 line to line ±1KV(See Fig.1 for typical application circuit)			perf. Criteria B	
			IEC/EN61000-4-5 line to line ±2KV (See Fig. 2 for recommended circuit)			perf. Criteria B	
			IEC/EN61000-4-5 line to line ±2KV/line to PE ±4K (See Fig. 3 for recommended circuit)			perf. Criteria A	
			EN55014-2			perf. Criteria B	
		CS	IEC/EN61000-4-6 10Vr.m.s			perf. Criteria A	
			EN55014-2			perf. Criteria A	

	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11 0%, 70%	perf. Criteria B
		EN55014-2	perf. Criteria B

Note: 1. When the output terminal of the product needs to be connected to PE through a Y capacitor, or close to the metal frame, please refer to the Fig. 3 for recommended circuit;



2. Unless otherwise specified, EMC performance indicators are tested according to typical application circuits (Fig. 1).

Characteristic Curve

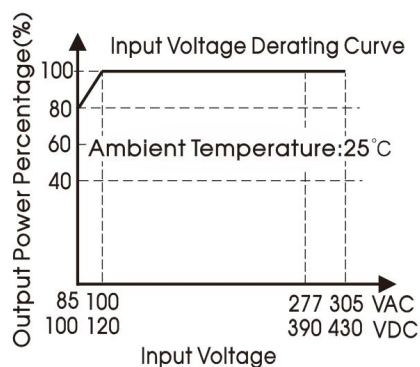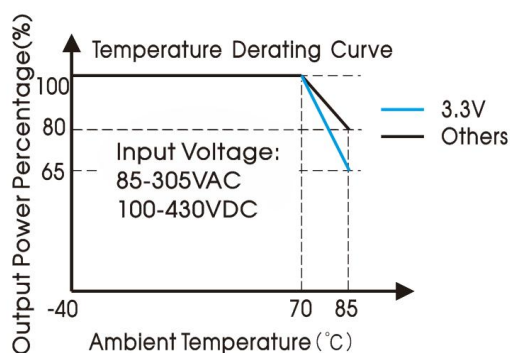

Note: ① With an AC input between 85-100V a DC input between 100-120VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling.

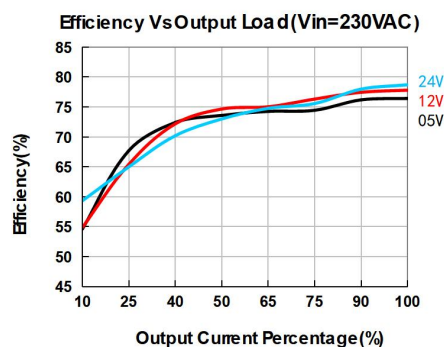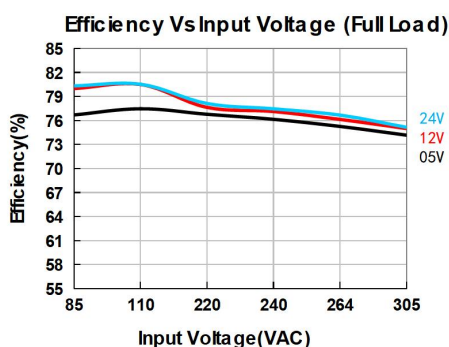

Design Reference

1. Typical application

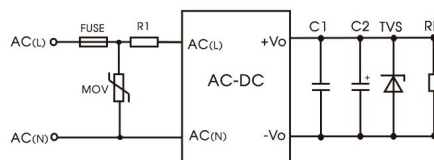


Fig. 1: Typical circuit diagram

Part No.	C1(uF)	C2(uF)	FUSE	R1	TVS	MOV
APD03-03	1	150	1A/300V, slow-blow, required	12Ω/3W (wire-wound resistor, required)	SMBJ7.0A	S10K350
APD03-05		150			SMBJ7.0A	
APD03-09		120			SMBJ12A	
APD03-12		120			SMBJ20A	

APD03-15		120			SMBJ20A	
APD03-24		68			SMBJ30A	

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

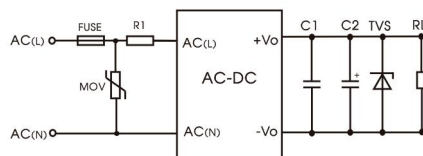


Fig. 2: EMC application circuit with higher requirements

Component	Recommended value
MOV	S14K350
R1	33Ω/3W (wire-wound resistor, required)
FUSE	2A/300V, slow-blow, required

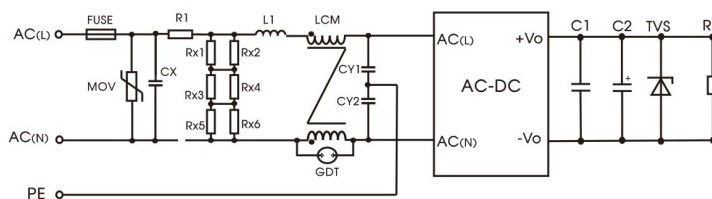



Fig. 3: Recommended circuit for class I equipment

(Recommended when the output terminal of the product needs to be connected to PE or connected to PE through a Y capacitor)


Component	Recommended value
FUSE	2A/300V, slow-blow, required
MOV	S14K350
CX	334K/305VAC
R1	33Ω/3W (wire-wound resistor, required)
L1	1.2mH/0.3A
CY1/CY2	1nF/400VAC
GDT	300V/1KA
LCM	20 mH

Note: Rx1/Rx2/Rx3/Rx4/Rx5/Rx6 is the bleeder resistance of CX, and the recommended resistance value is 1.5MΩ/150VDC.



Dimensions and Recommended

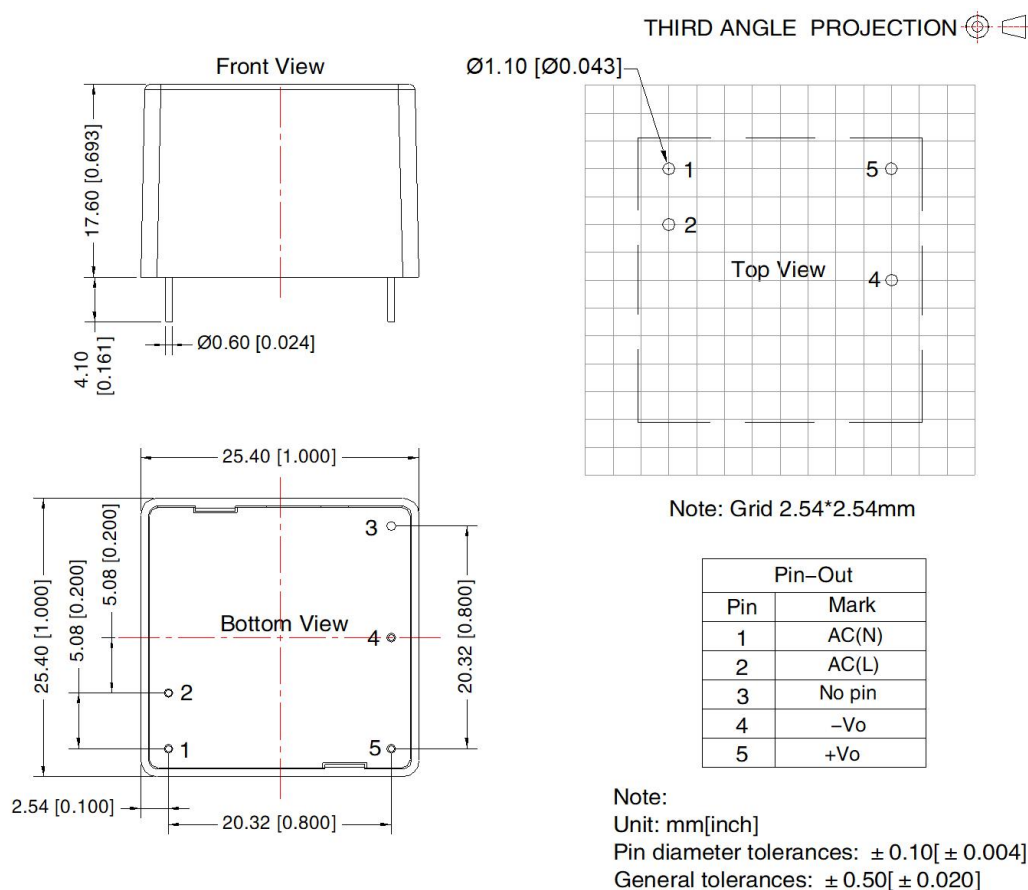

E2S Dimension

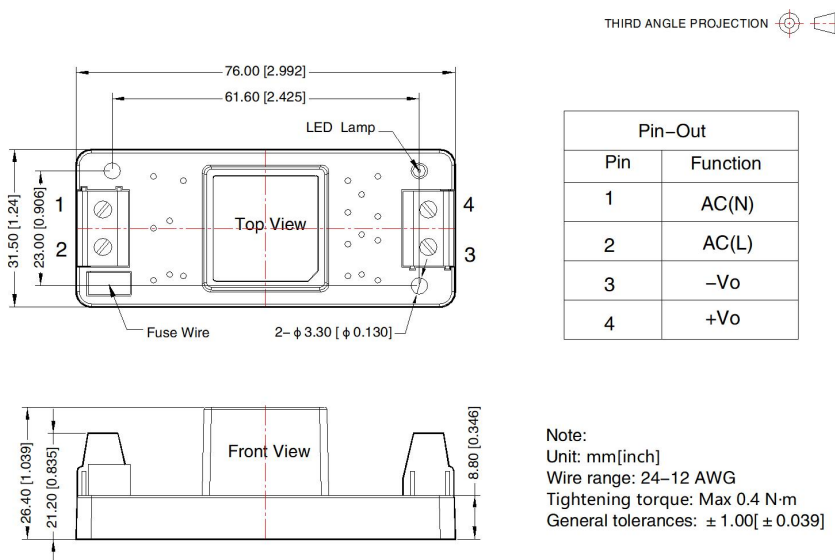

D4S Dimension

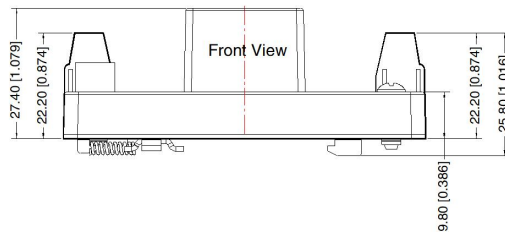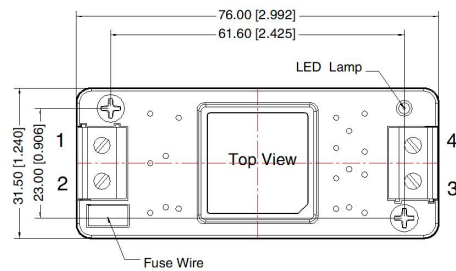

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:
 Unit: mm[inch]
 Wire range: 24-12 AWG
 Tightening torque: Max 0.4 N·m
 Mounting rail: TS35, rail needs to connect safety ground
 General tolerances: ± 1.00 [± 0.039]

Note:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.