


Descriptions

SMD Single universal CAN isolation transceiver module



EN62368-1



BS EN62368-1

Features

- Small size SMD package
- Integrated high efficiency isolated DC/DC converter
- Two-port isolation (3.0kVDC)
- High baud rate up to 1Mbps
- Operating ambient temperature range: -40°C to +105°C
- The bus supports maximum 110 nodes
- Integrated isolation and ESD bus protection

Applications

- Communication

Selection Guide

Certification	Part No.	Power input (VDC)	Baud rate (bps)	Static Current (mA)	Maximum Operating Current (mA)	Maximum Bus Voltage (VDC)	Number of Nodes
EN/BS EN	TCANL321PT	3.3	5k-1M	29	100	±30	110
	TCANL521PT	5	5k-1M	38	80	±30	110

Specifications

Product feature	Item		Symbol	Min.	Typ.	Max.	Unit
Absolute Limits	Input Surge Voltage (1sec.max.)		3.3V series	-0.7	--	5	VDC
			5.0V series	-0.7	--	7	
	Pin Soldering Resistance Temperature		Soldering time 10s (Max.)	--	--	300	°C
	Reflow Soldering Temperature			Peak temp. ≤245°C, maximum duration ≤60s at 217°C. Please also refer to IPC/JEDEC J-STD-020D.1.			
3.3V Series input Specifications	Power Supply Input Voltage		VCC	3.15	3.3	3.45	VDC
	TXD Logic Level	High-level	VIH	0.7VCC	--	3.6	
		Low-level	VIL	0	--	0.8	
	RXD Logic Level	High-level	VOH	VCC-0.4	3.1	--	
		Low-level	VOL	--	0.2	0.4	mA
	TXD Drive Current		IT	2	--	--	
	RXD Output Current		IR	--	--	10	
	Serial Interface		Standard CAN controller interface for +3.3V				
5V Series Input Specifications	Power Supply Input Voltage		VCC	4.75	5	5.25	VDC
	TXD Logic Level	High-level	VIH	0.7VCC	--	5.5	
		Low-level	VIL	0	--	0.8	
	RXD Logic Level	High-level	VOH	VCC-0.4	4.8	--	
		Low-level	VOL	--	0.2	0.4	mA
	TXD Drive Current		IT	2	--	--	
	RXD Output Current		IR	--	--	10	
	Serial Interface		Standard CAN controller interface for +5.0V				
Transmission Specifications	Data Delay	TXD Transmitter Delay	tT	--	60	115	ns
		RXD Receiver Delay	tR	--	70	135	
		Cycle Delay	tPRO (TXD-RXD)	--	130	250	
Output Specifications	Dominant Level (Logic 0)	CANH	V(OD)CANH	2.75	3.5	4.5	VDC
		CANL	V(OD)CANL	0.5	1.5	2.25	
	Recessive Level (Logic 1)	CANH	V(OR)CANH	2	2.5	3	
		CANL	V(OR)CANL	2	2.5	3	
	Differential Level	Dominant Level (Logic 0)	Vdiff(d)	1.5	2	3	
		Recessive Level (Logic 1)	Vdiff(r)	-0.05	0	0.05	
	Bus Pin Maximum Withstand Voltage		VX	-30	--	+30	
	Bus Transient Voltage		Vtrt , meets ISO7637-3 standard	-100	--	+100	
	Bus Pin Leakage Current		(VCC=0V, VCANH/L=5V)	-5	--	5	uA
	Load Resistance Differential		RL	50	60	65	Ω
	Input Impedance Differential		Rdiff	20	--	100	kΩ
	CAN Bus Interface		Meets ISO/DIS 11898-2 standard Twisted-pair output				

General Specifications	Isolation Test	Electric strength test for 1 min., leakage current <1mA	3.0 kVDC
	Insulation Resistance	At 500VDC	1000MΩ (input-output)
	Operating Temperature	-40°C to +105°C	
	Transportation and Storage Temperature	-50°C to +125°C	
	Operating Humidity	Non-condensing	10% - 90%
	Safety Class	CLASS III	
Mechanical Specifications	Dimensions	SMD8; Dimension 21.80 x 14.80 x 7.20mm	
	Weight	1.9g (Typ.)	
	Cooling Method	Free air convection	

Electromagnetic Compatibility (EMC)

Emission	CE	CISPR32/EN55032	CLASS A (see Fig. 3)	
Immunity	ESD	IEC/EN 61000-4-2	Contact ±4kV (without external components, signal port)	Perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m (without external components)	Perf. Criteria A
	EFT	IEC/EN 61000-4-4	±2kV (without external components, signal port)	Perf. Criteria B
	Surge	IEC/EN 61000-4-5	±2kV (line to ground) (without external components, signal port)	Perf. Criteria A
	CS	IEC/EN 61000-4-6	3Vr.m.s (without external components)	Perf. Criteria A

Application Precautions

1. Carefully read and follow the instructions before use; contact our technical support if you have any question;
2. Do not use the product in hazardous areas;
3. use only DC power supply source for this product. AC power supply is prohibited;
4. It is strictly forbidden to disassemble the product privately in order to avoid product failure or malfunction;
5. Hot-swap is not supported;
6. If the external input of TXD is insufficient, the pull-up resistor should be added according to the situation;
7. The various components of the product may have inconsistent screens due to different production batches, it does not affect the product performance.

After-sales service

1. Factory inspection and quality control are strictly enforced before shipping any product; please contact your local representative or our technical support if you experience any abnormal operation or possible failure of the module;
2. The products have a 3-year warranty period, from the date of shipment. The product will be repaired or exchanged free of charge within the warranty period for any quality problem that occurs under normal use.

Design Reference

1. Typical application circuit

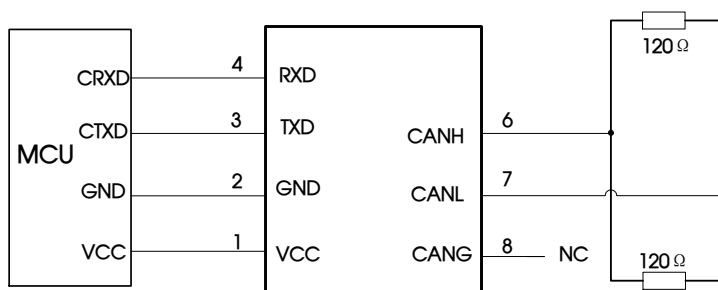


Fig. 1

Figure 1 shows a typical application circuit for connecting a module. The module with its integrated power supply, CAN controller and CAN bus network interface can generally be used by customers as is, without the need of adding peripheral circuits.


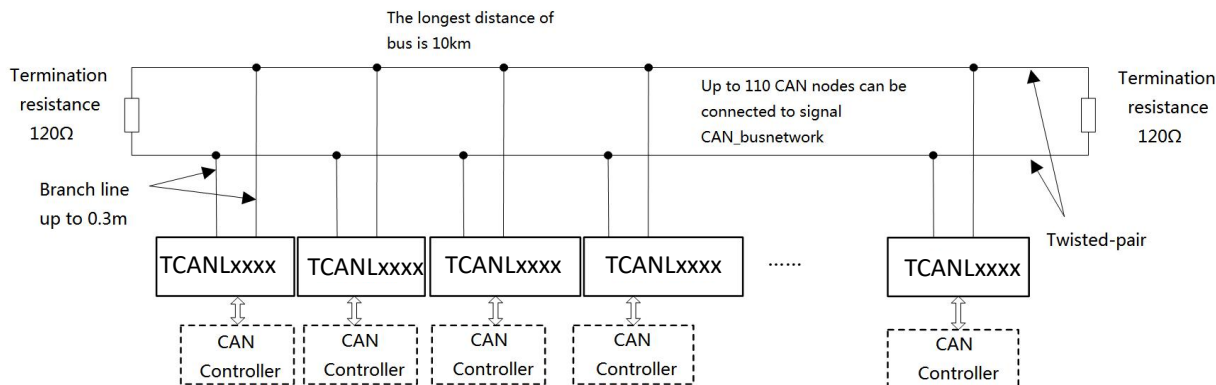


Fig.2

As shown in Figure 2, a single CAN-bus network allows connecting as many as 110 isolated single-channel TCANL transceiver modules. This universal type module supports a maximum communication distance of 10km while the high-speed type module can support a maximum communication distance of 1km with a baud rate beyond 40kbps. For accessing more nodes or achieving longer communication distances, CAN repeaters or other expansion equipment can easily be used.

Note: The communication distance of the bus is related to the communication speed and its field application. It can be designed according to the actual application and reference standard. We recommended the use of a twisted pair or shielded twisted pair as the communication cable and it should be kept away from any sources of interference. For long-distance communication, the terminal resistance value needs to be selected in accordance with the communication distance, the cable impedance and the number of nodes.

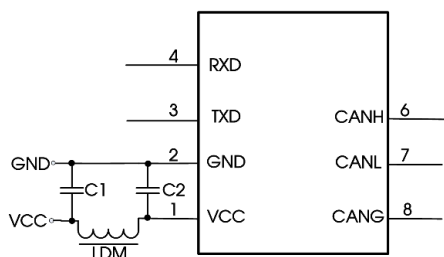

Component	Recommended part, value
C1, C2	1uF/16V
LDM	CD43-12uH

Fig.3

2. Recommended port protection circuit

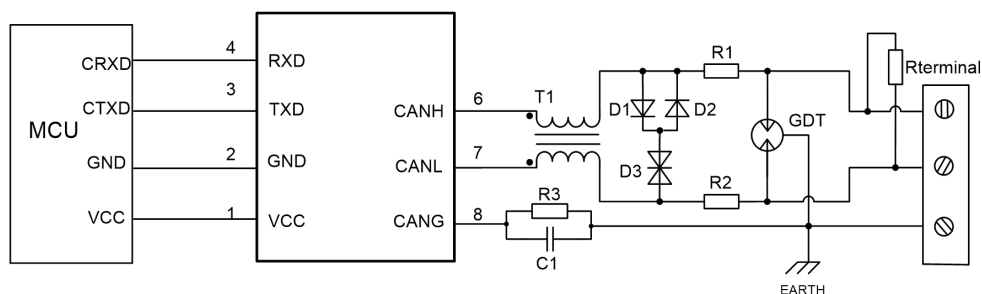


Fig.4

Note: Ground shield of twisted wire pair reliably.


Recommended components and values:

Component	Recommended part, value	Component	Recommended part, value
R3	1MΩ	R1, R2	2.7Ω/2W
C1	1nF, 2kV	D1, D2	1N4007
T1	ACM2520-301-2P	D3	SMBJ30CA
GDT	B3D090L	R terminal	120Ω


When the module is used in applications with harsh environment, it can be susceptible to large energy like lightning strike, etc. in which case, it is essential to add an adequate protection circuit to the CAN signal ports to protect the system from failure and maintain a reliable bus communication. Figure 4 provides a recommended protection circuit design for high-energy lightning surges, with a degree of protection related to the selected protection device. Parameter description lists a set of recommended circuit parameters, which can be adjusted according to the actual application situation. Also, when using the shielded cable, the reliable single-point grounding of the shield must be achieved.

Note: The recommended components that will change the Specifications of Bus Pin Maximum Withstand Voltage by D3 and its values is a general guideline only. It must be verified for the actual user's application. We recommended using PTC's for R1 and R2 and to use fast recovery diodes for D1 and D2.

Dimensions and Recommended Layout

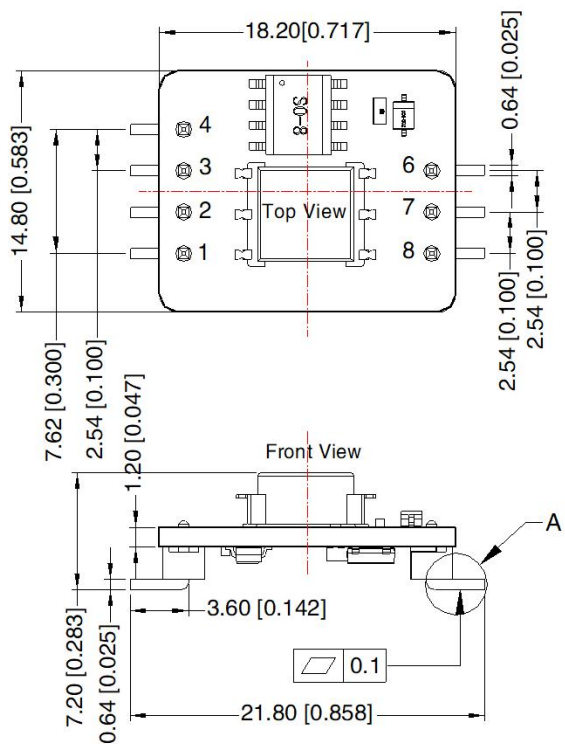


Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 1.0 [\pm 0.039]$

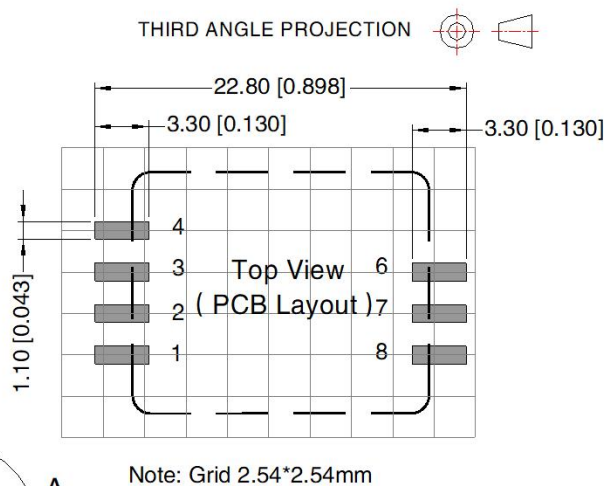

Pin-Out		
Pin	Function	Mark
1	VCC	Input Power+
2	GND	GND
3	TXD	Send Pin
4	RXD	Receiving Pin
6	CANH	CANH Pin
7	CANL	CANL Pin
8	RGND	Isolation Power Output RGND

Package diagram

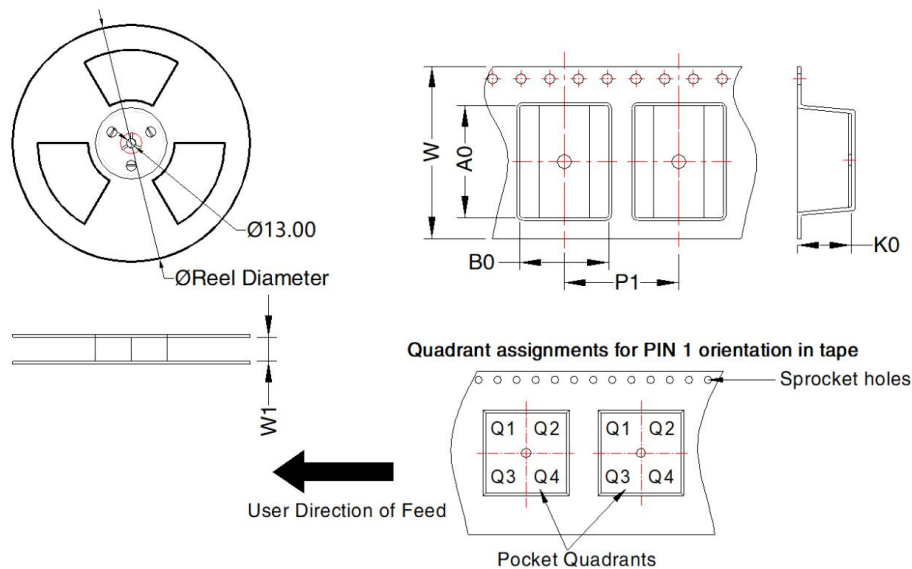

Package Type	Pin	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SMD	9	300	330.0	44.4	22.6	15.6	8.5	24.0	44.0	Q1

Notes:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity $<75\%\text{RH}$ with nominal input voltage and rated output load;
2. There may be slight colour difference on the surface of the PCB, which is normal and does not affect product use;
3. All index testing methods in this datasheet are based on company corporate standards;
4. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.